



XTREMTEC XT-K101 2.4G Wireless Keyboard and Mouse Combo User Manual

[Home](#) » [Xtremtec](#) » XTREMTEC XT-K101 2.4G Wireless Keyboard and Mouse Combo User Manual 

XTREMTEC

2.4G Wireless Keyboard &
Mouse Combo
User Manual
XT-K101

Thank you very much for purchasing this keyboard and mouse combo, please read this user manual carefully to ensure your new keyboard and mouse combo functions correctly.

Contents

- [1 Package Contents](#)
- [2 Specification of Keyboard](#)
- [3 Specification of Mouse](#)
- [4 Product Layout](#)
- [5 Product Indicators](#)
- [6 Keys and Function](#)
- [7 System Requirements](#)
- [8 Connection Steps](#)
- [9 Troubleshooting Steps](#)
- [10 Keyboard Features](#)
- [11 Safety Instructions](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)

Package Contents

- 1 x Wireless Keyboard
- 1 x Wireless Mouse
- 1 x 2.4G USB Receiver

- 1 x User Manual


Specification of Keyboard

Define the name	instructions
Operate system	Windows 7 and above
Power supply	Dry cell 2*AAA
Sleep time	5S after stop using keyboard
Key life	3 million strokes
Standby time	40 days
Continuous working time	300 hours of continuous use
Wake up way	Click any key
Dimensions	371.5 *130.2*19.4 MM
Operating distance	Within 8 meters
Low voltage	1 second 1 flash
Working current	Open the Caps lock 3 MA
Sleep current	13.02MA

Specification of Mouse

Connect Method	2.4G Wireless
Dimensions	110.1*60*31.4MM
Operating Range	< 8 meters
DPI	1600
Working current	≤ 12 mA (About 30 minutes deep sleep)
Sleeping current	≤ 0.03mA
Wake up method	Press any keys
Power supply	Dry cell 1*AA
Keys Life	Three hundred thousand. clicks
Uninterrupted Work Time	100 hours
Stand-by time	60 days
Sleep time	3S after stop using keyboard



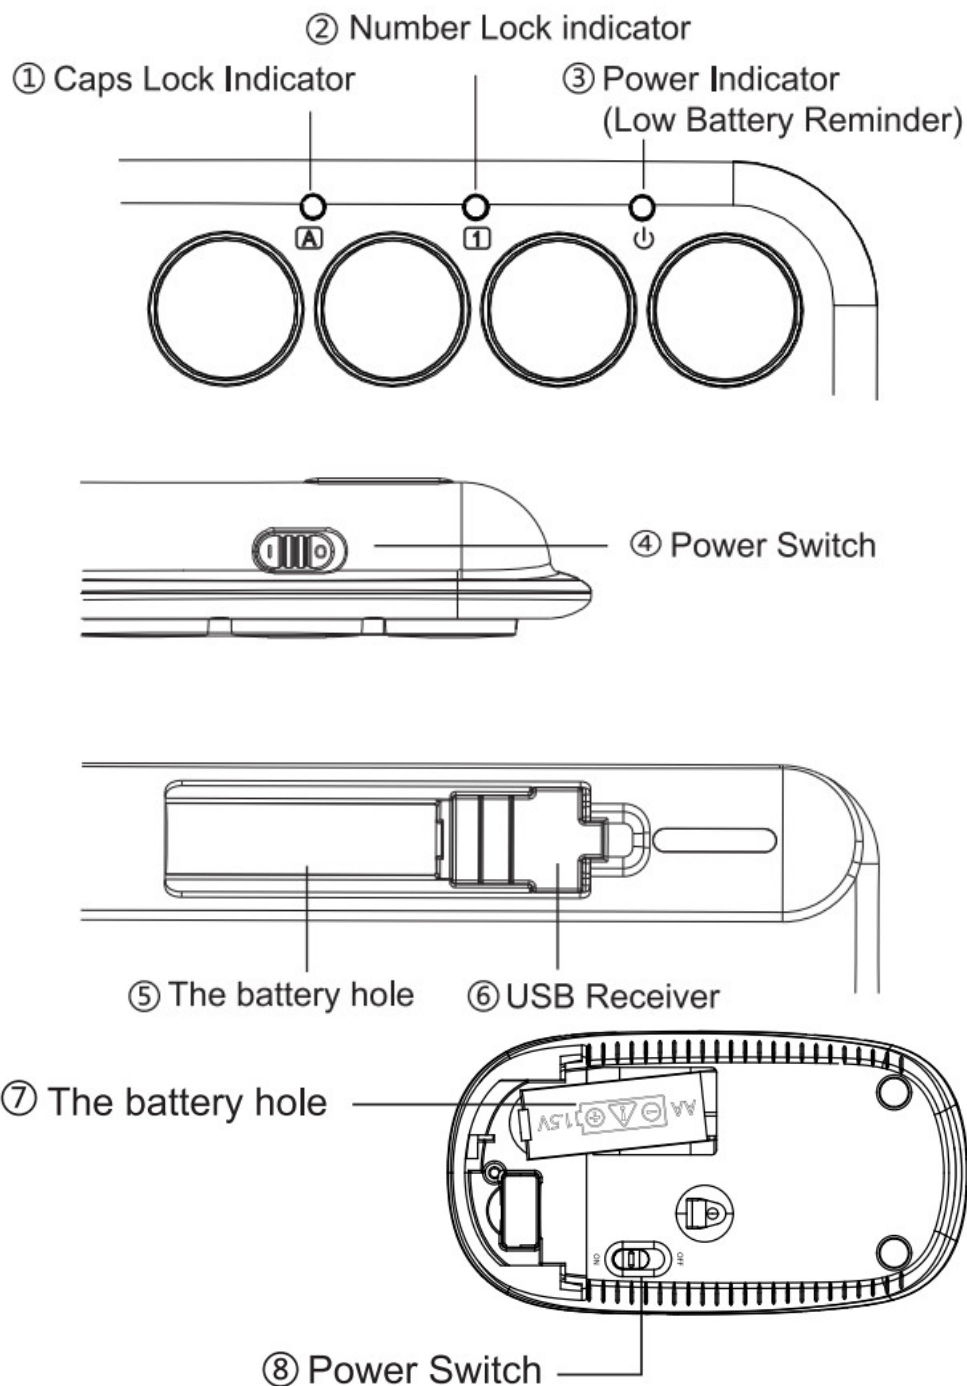












Product Layout



Product Indicators

1. **Caps Lock Indicator:** Green indicator light is on when the Caps Lock is activated.
2. **Number Lock Indicator:** Green indicator light is on when the Number Lock is activated.
3. **Keyboard battery status indicator**
When keyboard is turned on, battery status indicator lights up red for 3 seconds, then turns off.
 - Blinking red: Battery is low. Please replace the dry battery in time.
4. **Power Switch:** Slide to the right to turn on the keyboard and slide to left to turn off.
Turn the switch up and turn the mouse on, Turn the switch down and turn the mouse on.
5. **Power supply:** Open the battery cover and load the dry battery.
6. **USB Receiver:** USB Receiver slot.
Open the keyboard battery cover and see the receiver slot.

Keys and Function

Key	Windows	Key	Windows
	FN lock		Previous
	Play&Pause		Next track
	Mute		Volume –
	Volume +		Browser
	Search		Email
	Favorite		Calculator
	Brightness down		Brightness up
	Lock screen		

System Requirements

Windows 7 or above, Windows with USB port (for the USB receiver).

Connection Steps

Step 1. Set power switches of the keyboard and mouse to “On”

Step 2. Connect the USB receiver to the computer.

Troubleshooting Steps

The XT-K101 Keyboard & Mouse Combo comes with only one USB receiver, and it is pre-paired to enable plug-and-play use. If you have problem with connecting the keyboard or mouse to your device, please try to reset the USB receiver by following these instructions.

The USB receiver needs to pair with the keyboard and mouse separately. You can either pair your keyboard or mouse first.

Pair to the Keyboard

1. Turn on the keyboard, and long-press ESC and += keys together to enter the Pairing Mode. The battery indicator on the keyboard will flash rapidly.
2. Insert the USB receiver into your device within 20 seconds. Place your keyboard close to the USB receiver within 30 cm.
3. Once paired, the battery indicator will go out.
4. If the connection is not successful, the battery indicator will go out after flashing rapidly for 20 seconds. Please unplug the receiver, turn off your keyboard, and try to pair again starting from step 1.

Pair to the Mouse

1. Turn on the mouse. Press and hold the left button, right button and middle button together to enter the Pairing Mode. Do not release your fingers while inserting the USB receiver into your device.
2. Wait for 5-8 seconds when placing your mouse close to the USB receiver. The receiver will pair with your mouse automatically.
3. If the pairing is not successful, the indicator will go out after 20 seconds. Please unplug the receiver, turn off your mouse, and try to pair again starting from step 1.

Keyboard Features

1. USB nano receiver is in the battery compartment of the keyboard, under the battery cover.
2. Plug and play.
3. Portable.
4. Enhanced scissor keys, more sensitive and durable.
5. Slim spill-resistant design with low profile keys for a comfortable typing experience.

Safety Instructions



Warning: Fire, electric shock, damage to keyboard device could occur if the following instructions are not obeyed



Danger (high risk) X Warning (Moderate risk) Note (Poor risk)

x 1. Away from edge tool



2. Away from microwave radiation source

x 3. Do not place heavy objects on this product

x 4. No shocking and bending



5. Away from oil, chemical, or organic solvents

<div>EC</div> <div>REP</div>	eVatmaster Consuling Gmbh Bettinastr.30 60325 Frankfurt am Main,Germany contact@evatmaster.com
<div>UK</div> <div>REP</div>	EVATOST CONSULTING LTD Suite 11, First Floor, Moy Road Business Centre, Taffs Well, Cardiff, Wales, CF15 7QR contact@evatmaster.com

Federal Communications Commission (FCC) Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the

FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications made to this device not expressly approved by the party responsible for compliance may void the FCC authorization to operate this device.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user’s authority to operate the equipment.

XTREMTEC

Documents / Resources

	XTREMTEC XT-K101 2.4G Wireless Keyboard and Mouse Combo [pdf] User Manual XT-K101, XT-K101 2.4G Wireless Keyboard and Mouse Combo, 2.4G Wireless Keyboard and Mouse Combo, Wireless Keyboard and Mouse Combo, Keyboard and Mouse Combo, Mouse Combo, Combo
--	---

References

- [User Manual](#)