



## zimi Powermesh Multi Purpose Switch Instruction Manual

[Home](#) » [Zimi](#) » zimi Powermesh Multi Purpose Switch Instruction Manual 

### Contents

- 1 [zimi Powermesh Multi Purpose Switch](#)
- 2 [Read before installing](#)
- 3 [Using the Multi-Purpose Switch](#)
- 4 [Identifying the switches](#)
- 5 [Technical specifications](#)
- 6 [2 or 3 Wire Mode with Auto-Sensing](#)
- 7 [Pair and setup with Zimi](#)
- 8 [7 Multi-way Switching with Behaviour Link](#)
- 9 [Want to learn more or need help?](#)
- 10 [Powermesh Status Indicator.](#)
  - 10.1 [Blue](#)
  - 10.2 [White](#)
  - 10.3 [White pulsing](#)
  - 10.4 [Blue & White pulsing](#)
  - 10.5 [Red](#)
  - 10.6 [OFF](#)
- 11 [Manufacturer's Warranty](#)
- 12 [Documents / Resources](#)
  - 12.1 [References](#)
- 13 [Related Posts](#)




**zimi Powermesh Multi Purpose Switch**




### **Read before installing**

- Must only be installed by a LICENSED ELECTRICIAN to local wiring regulations.
- Failure to follow these instructions can result in serious injury or death.
- Powermesh devices must only be connected with the Active and Neutral from the same RCD.
- Surge protection is recommended at the main switchboard.
- Products damaged by power surges are not covered by warranty.
- Megger testing may lead to low readings due to electronic components so disconnect all electronic devices before taking a reading. Install the included warning sticker with circuit detail in the main electrical switchboard.

### **Using the Multi-Purpose Switch**

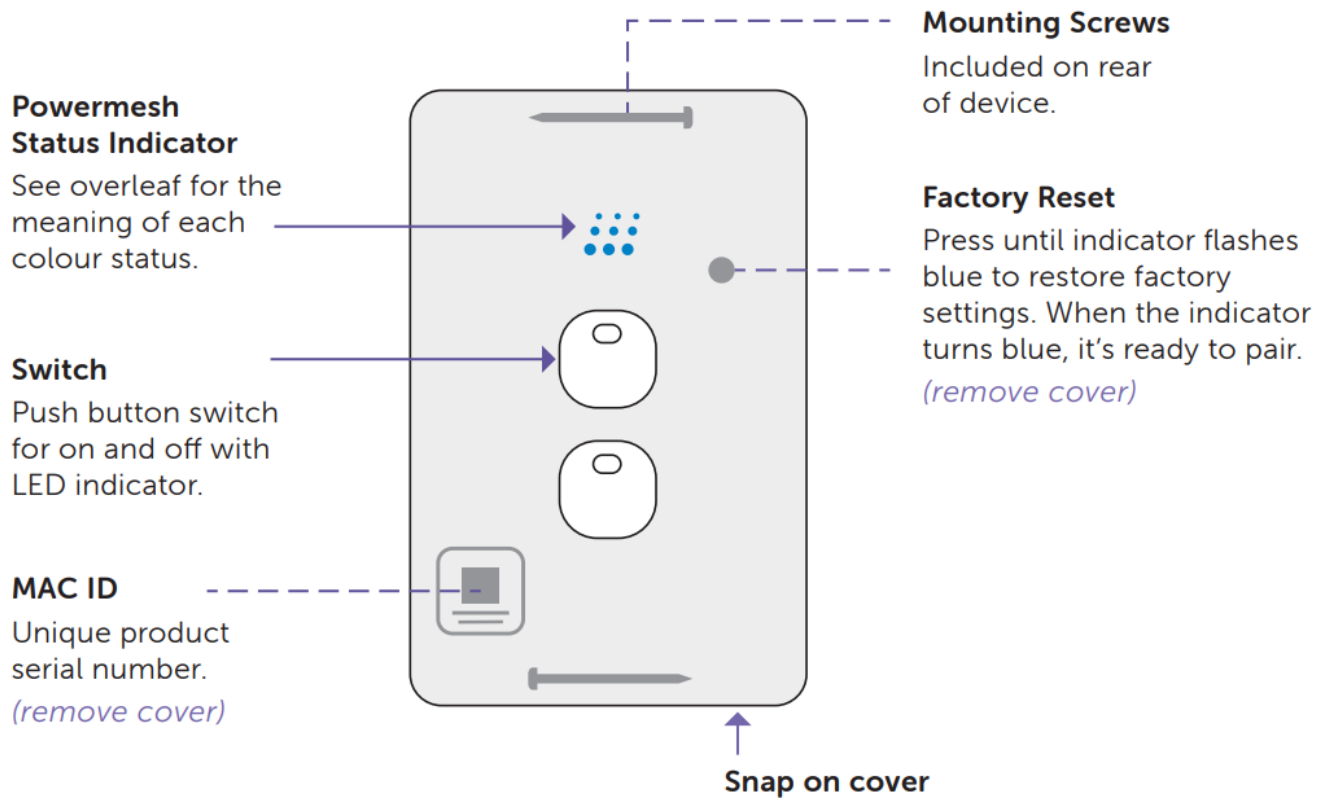



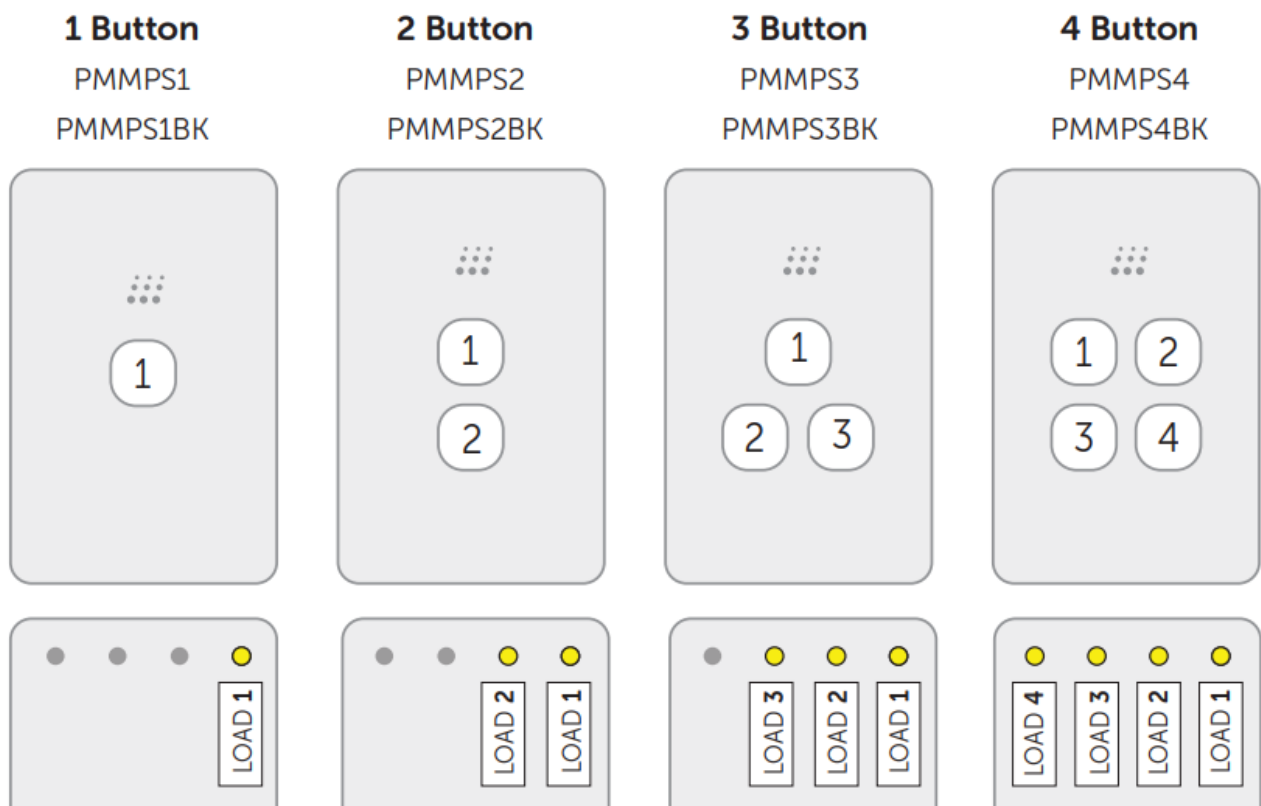




## Identifying the switches







## Technical specifications



## Compatible load types

	LED
	Incandescent
	Fluorescent
	CFLs
	Electronic transformers
	Standard iron core & toroidal transformers
	Exhaust fans / small motors

## Rated Loads

Mode				
3 Wire with Neutral	5AX max	5AX max per channel, 10AX total max load		
2 Wire without Neutral	5A max	5AX max per channel, channel 1 is 5A only. See note below.		

## 2 or 3 Wire Mode with Auto-Sensing

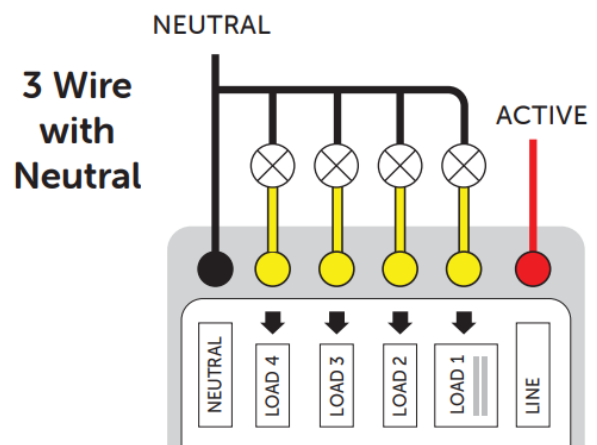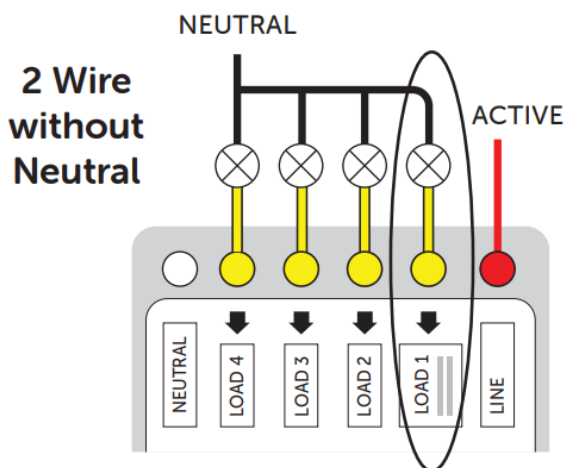

Always use a Neutral wire where possible. When operating without a neutral connection, a small amount of power is used via LOAD 1 when switched off. This may in some instances result in lights not completely turning off. Dimmable loads might be fixed by increasing to at least 2 lights with a load >10W. Non-Dimmable loads may require a bypass/load correction device fitted if the load is insufficient.

## Pair and setup with Zimi

- Download the Zimi App.
- Choose 'Add Device'.
- Follow the on-screen instructions.



### Zimi App Download

Point your phone camera at the QR code to open the app store.



## 7 Multi-way Switching with Behaviour Link

- The 'Behaviour link' feature makes multi-way switching easy.
- Buttons turn off and on together when either one is pressed.
- Any button without load can be linked to a button with a load.





Remote access  
anywhere.



Voice control  
hands free.




Energy history  
over time.

## Want to learn more or need help?

Enjoy all the features to make your life easier. Visit our website for tips, tricks, and help.

- **Behaviour Link**
- Control a switch from another switch.
- **Schedules**
- Turn it on and off any day or time.
- **Energy Use**
- Monitor the power usage and cost.
- **Auto off Timer**
- Turn it off automatically.



## Powermesh Status Indicator.

### Blue

- **Ready to pair.**
- 'Add device' in Zimi to pair and complete setup.

### White

- **The setup is complete.**
- This device has been paired and the setup completed.

### White pulsing

- **Action in progress.**
- This lets you know an automatic function is being activated.

#### **Blue & White pulsing**

- **Identify device.**
- This shows the device when updating its settings.

#### **Red**

- **Device problem.**
- Please refer to support to resolve the problem.

#### **OFF**

- If the device is working, the indicator has been 'turned off in device settings.

### **Manufacturer's Warranty**

1. **Manufacturer's Warranty** This product has been manufactured to the highest quality standards. This product is warranted to the original purchaser and is not transferable. The product is guaranteed to be free from defects in workmanship and parts for a period of 1 Year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired, replaced, or refunded. The benefits conferred by this warranty are in addition to all other rights and remedies of the consumer under Commonwealth, State, and Territory laws in relation to the goods or services to which this warranty relates and Australian Consumer Law. Risk in regard to the product to be repaired shall at all times remain with the Purchaser. The warranty is given on the condition that the product to which it applies is used for the purpose and in the manner intended by its construction and for no other purposes whatsoever. GSM Innovations Pty Ltd shall not be responsible for damage of any kind, caused by accidents, power surges, electrical storm damage, incorrect power current, infestation (vermin or insect), incorrect installation, incorrect electricity or plumbing installation, improper use of controls or failure to use the unit in accordance with the operating instructions, general misuse or abuse or from normal wear and tear. Any attempt by an unauthorized person to repair or tamper with the equipment shall render the warranty null and void. Goods presented for repair under this warranty may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. GSM Innovations Pty Ltd's liability under this warranty is limited to the replacement and/or repair of the defective parts within the warranty period and does not extend to installation or removal of the product. Acceptance of liability by GSM Innovation Pty Ltd contained herein is to the exclusion of any other remedy whatsoever and howsoever arising in respect of any equipment to which it applies.
2. **Proof of Purchase** Please keep your purchase docket or receipt as proof of purchase and as proof of the date on which the purchase was made. The purchase docket or receipt must be presented with the warranty when making a claim under this warranty. Failure to produce documentary proof of the date of original acquisition by the original Purchaser will result in a charge being levied for work done, labor and parts supplied. Likewise, a charge will be made for any calls following the warranty claim where no fault is found with the unit. Service during the warranty period The first point of contact for product issues is the place of purchase. The product



must be returned to the original place of purchase for product repair, replacement, or refund. Please ensure the product is properly packaged so as to ensure that no damage occurs to the product during transit and make sure that you have included an explanation of the problem. In the event of goods requiring repair under the manufacturer's warranty, the owner is responsible for the cost of transportation. Should the goods be found to be in sound working order the owner might be charged a fee. This warranty is given by GSM Innovations Pty Ltd, 14 Millennium Circuit, Helensvale, QLD 4212

3. Safety Warnings Read all instructions and safety information. All electrical work must only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker, to ensure all-pole disconnection from the electrical supply. All electrical work must be carried out by a licensed and qualified electrician and in accordance with AS/NZS 3000 Wiring Rules and applicable 14 Millennium Circuit Helensvale QLD 4212 Australia. [www.zimi.life](http://www.zimi.life)

## Documents / Resources

	<a href="#">zimi Powermesh Multi Purpose Switch</a> [pdf] Instruction Manual Powermesh Multi Purpose Switch
-----------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------

## References

-  [Amazon.com. Spend less. Smile more.](https://www.amazon.com)