



# 8BitDo SN30 Pro Plus Bluetooth Gamepad Instruction Manual

[Home](#) » [8Bitdo](#) » 8BitDo SN30 Pro Plus Bluetooth Gamepad Instruction Manual 

## Contents

### [1 8BitDo SN30 Pro Plus Bluetooth Gamepad](#)

- [1.1 Switch](#)
- [1.2 Windows](#)
- [1.3 Android](#)
- [1.4 Apple](#)

### [2 Documents / Resources](#)

### [3 Related Posts](#)




**8BitDo SN30 Pro Plus Bluetooth Gamepad**



### SN30 Pro+ Bluetooth gamepad – instruction manual

- Press start to turn on the controller.
- Hold start for 3 seconds to turn off the controller.

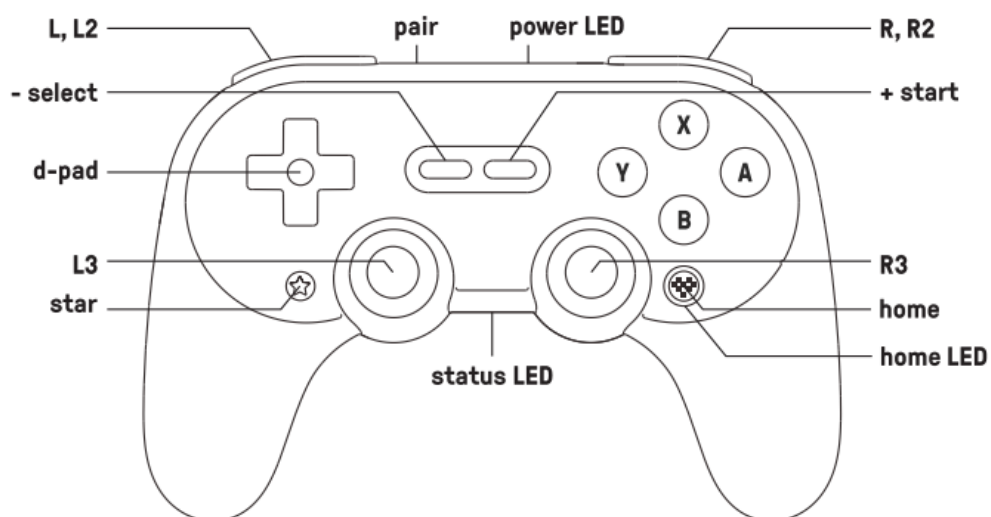

### Switch

- motion controls, NFC scanning, IR camera, HD rumble, notification LED are not supported, nor can the system be waken up wirelessly.
- the status LED indicates the number of players, 1st LED on for the first player, the 1st and 2nd LEDs on for the second player, up to 8 players maximum.

## 1. Bluetooth connection

- press and hold Y + start to turn on the controller. LED starts to rotate from left to right.
- hold the pair button for 3 seconds to enter its pairing mode. LED stops blinking for a short moment then starts to rotate again (this is required for the very first time only).
- go to your Switch Home Page to click on Controllers, then click on Change Grip/Order.
- LED becomes solid when the connection is successful.

## 2. Wired connection

- please ensure the [Pro Controller Wired Communication] is enabled.
  - press and hold Y + start to turn on the controller. LED starts to rotate from left to right.
  - connect the controller to the use port of your Switch dock, wait till the controller is successfully recognized by your Switch to play.

## Windows

- required system: Windows 10 (1903) or above.

## 1. Bluetooth connection

- press and hold X + start to turn on the controller, the 1st and 2nd LEDs start to blink.
- hold pair button for 3 seconds to enter its pairing mode. LED starts to rotate from left to right (this is required for the very first time only).
- go to your Windows device's Bluetooth setting and turn it on, pair with (8BitDo SN30 Pro +), LED becomes solid when the connection is successful.

## 2. Wired connection

- press and hold X + start to turn on the controller, the 1st and 2nd LEDs start to blink.
- connect the controller to the USB port of your Windows device, wait till the controller is successfully recognized by your Windows device to play.

## Android

- required system: Android 9.0 or above.

## 1. Bluetooth connection

- press and hold B + start to turn on the controller, the 1st LED starts to blink.
- hold pair button for 3 seconds to enter its pairing mode. LED starts to rotate from left to right (this is required for the very first time only).
- go to your Android device's Bluetooth setting, pair with [8BitDo SN30 Pro+], LED becomes solid when connection is successful.

## 2. Wired connection

- OTG support is required on your Android device, please contact your manufacturer for more information.
  - press and hold B + start to turn on the controller, the 1st LED starts to blink.
  - connect the controller to the use port of your Android device, wait till the controller is successfully

recognized by your Android device to play.

## Apple

- **Required system:** iOS 16.3, iPadOS 16.3, tvOS 16.3, macOS 13.2 or above. Apple, iPadOS, macOS, and tvOS are trademarks of Apple Inc., registered in the U.S. and other countries.

### 1. Bluetooth connection

- press and hold B + start to turn on the controller, the 1st LED start to blink.
- hold the pair button for 3 seconds to enter its pairing mode. The LED starts to rotate from left to right (this is required for the very first time only).
- go to your Apple device's Bluetooth setting and turn it on, pair with 8BitDo SN30 Pro+ J. LED becomes solid when the connection is successful.

### 2. Wired connection

- use wired connection is only available for macOS or iPadOS devices with USB-C ports.
- Press and hold B + start to turn on the controller, the 1st LED start to blink.
- connect the controller to the USB port of your Apple device, wait till the controller is successfully recognized by your Apple device to play.

## Turbo function

- home LED blinks continuously when the button with turbo functionality is pressed.
- the star button is a screenshot button when connected to Nintendo Switch.
- D-pad, joysticks, home, select and start buttons are not included. Hold the button you would like to set the turbo functionality to, then press it to activate /deactivate its turbo functionality.

## Battery

1000mAh built-in battery pack with 20 hours of playtime. Rechargeable with 4-hour charging time. Replaceable with AA batteries with 20 hours of play time.

## Status: LED indicator

- **low battery mode red:** LED blinks
  - **battery charging red:** LED stays solid
  - **battery fully charged:** red LED turns off
- the controller will turn off in 1 minute with no connection or 15 minutes of inactivity when connected with Bluetooth.
  - controller stays on with a wired connection.

## Ultimate Software

- it gives you elite control over every piece of your controller: customize button mapping, adjust stick & trigger sensitivity, vibration control and create macros with any button combination.
- create controller profiles and switch between them at any time.
- please visit [support.8bitdo.com](https://support.8bitdo.com) for the application.

Support

please visit [support.8bitdo.com](https://support.8bitdo.com) for further information & additional support.



Documents / Resources

	<p><a href="#">8BitDo SN30 Pro Plus Bluetooth Gamepad</a> [pdf] Instruction Manual SN30 Pro Plus Bluetooth Gamepad, SN30 Pro Plus, Bluetooth Gamepad, Gamepad</p>
--	---