

8BitDo®
ULT3MX Ultimate
3-Mode Controller
for Xbox



8BitDo ULT3MX Ultimate 3-Mode Controller for Xbox User Guide

[Home](#) » [8Bitdo](#) » 8BitDo ULT3MX Ultimate 3-Mode Controller for Xbox User Guide 

Contents

- [1 8BitDo ULT3MX Ultimate 3-Mode Controller for Xbox](#)
- [2 Product Usage Instructions](#)
- [3 Product Overview](#)
- [4 Volume Control](#)
- [5 Battery](#)
- [6 FCC regulatory conformance](#)
- [7 FAQs](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

8BitDo®

8BitDo ULT3MX Ultimate 3-Mode Controller for Xbox



Specifications

- 3-mode controller for Xbox
- Compatible with Xbox Series/One consoles, Windows 10/11, Android, and Apple devices
- Wired and wireless connectivity options
- Volume control for adjusting voice chat and game volume
- Fast button swap feature
- P1/P2 button configuration
- Battery status LED indicator

Product Usage Instructions

Xbox Series/One Console – Wired Connection:

1. Turn the mode switch to Xbox/USB position.
2. Connect the controller to your Xbox console via a USB cable.
3. Wait for the controller to be recognized by the console; the LED indicator will stay solid upon successful connection.

Windows 10/11 – Wireless Connection

1. Connect the 2.4G adapter to your Windows device.
2. Turn the mode switch to PC/2.4G position.
3. Press the Xbox button on the controller to turn it on.
4. Wait for successful recognition by the device; both LED indicators should stay solid upon successful connection.

Android – Bluetooth Connection

1. Turn the mode switch to Mobile/Bluetooth position.
2. Press the Xbox button to turn on the controller.

3. Hold the Pairing button for 3 seconds to enter pairing mode; the LED indicator will blink rapidly.
4. Pair with [8BitDo Ultimate 3mode Xbox] in your Android device's Bluetooth list; LED indicator will stay solid upon successful connection.

Volume Control

To adjust in-game volume:

- Press and hold LSB for in-game volume down.
- Press and hold RSB for in-game volume up.

Fast Button Swap

To swap buttons quickly, repeat the same procedure or reconnect the controller to deactivate this function.

P1/P2 Button Configuration:

To configure P1/P2 buttons:


- To set configuration, press P1/P2 button along with Star button.
- To cancel configuration, press and hold [P1/P2 button + Star button].

Battery Status

The LED indicator on the controller displays battery status:

- Low battery
- Battery charging
- Battery fully charged

Product Overview

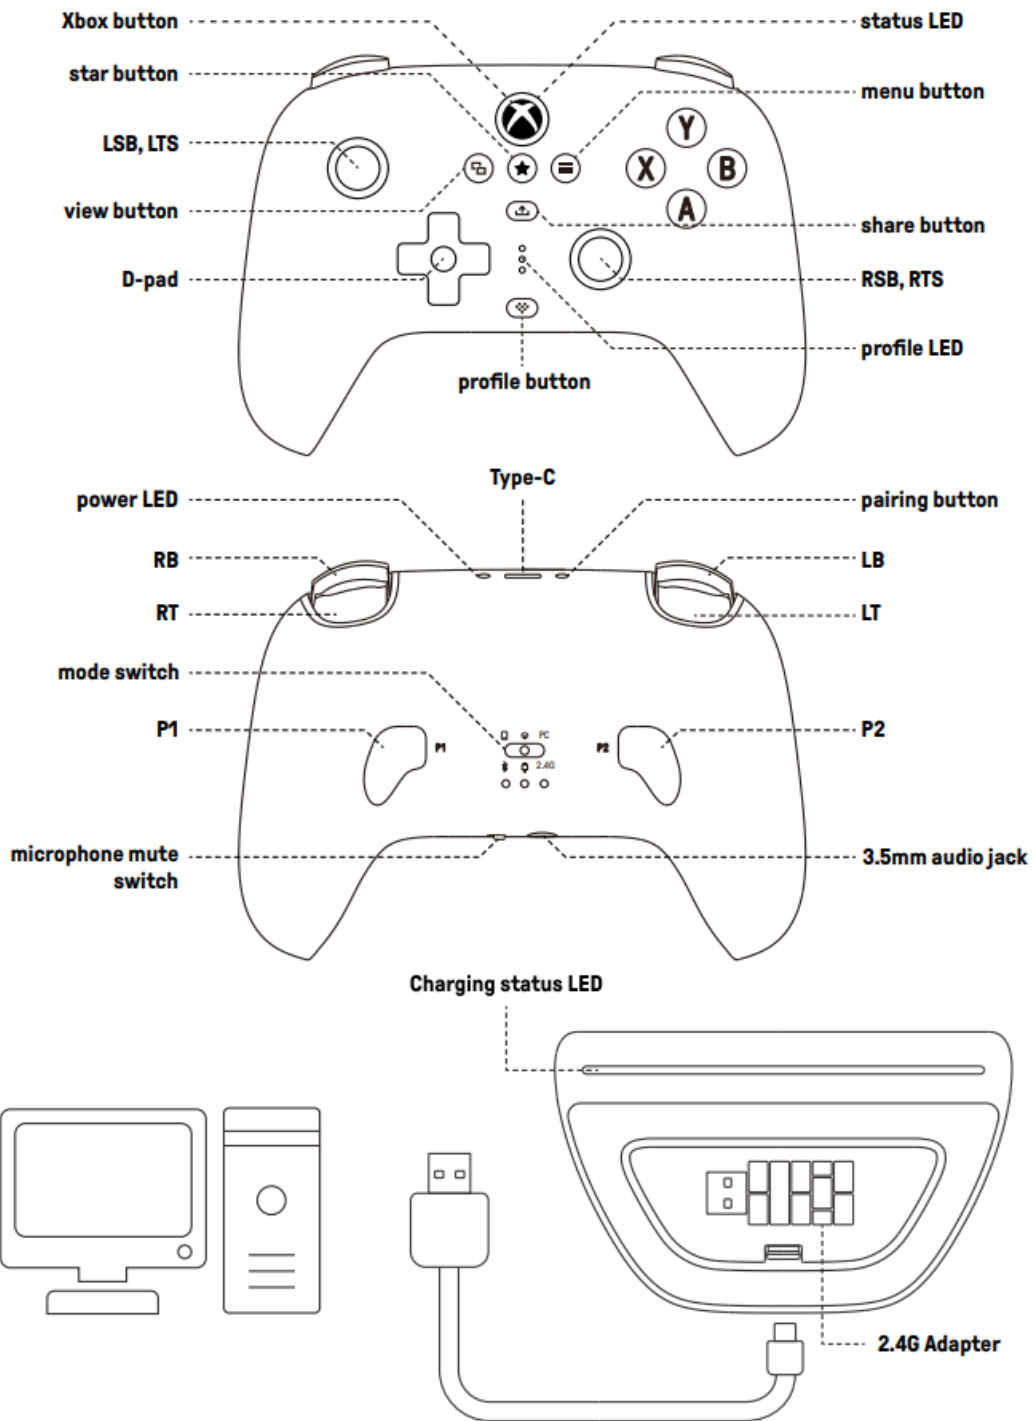

- Press the Xbox button to turn on the controller.
- Hold the Xbox button for 6 seconds to turn off the controller.
- Hold the Xbox button for 12 seconds to force the controller off.

Xbox Series/One console



- The latest system version of the Xbox console is required.

Wired Connection

1. Turn the mode switch to Xbox/USB position.
2. Connect the controller to your Xbox console via a USB cable and wait till the controller is successfully

recognized by the console, the LED indicator will stay solid when the connection is successful.

Windows 10/11



- Windows 10(1903) or above is required.

Wireless Connection

1. Connect the 2.4G adapter to your Windows device.
2. Turn the mode switch to PC/2.4G position.
3. Press the Xbox button to turn on the controller and wait till the controller is successfully recognized by the device. Both LED indicators on the controller and the adapter will stay solid when the connection is successful.

Wired Connection

1. Turn the mode switch to Xbox/USB position.
2. Connect the controller to your Windows device via a USB cable and wait till the controller is successfully recognized by the device, the LED indicator will stay solid when the connection is successful.

Android



- Android 9.0 or above is required.

Bluetooth Connection

1. Turn the mode switch to Mobile/Bluetooth position.
2. Press the Xbox button to turn on the controller.
3. Hold the Pairing button for 3 seconds to enter the pairing mode, the LED indicator will blink rapidly. (This is required for the very first time only.)
4. Go to your Android device's Bluetooth list and pair with [8BitDo Ultimate 3mode Xbox], the LED indicator will stay solid when the connection is successful.

Apple

@iOS 17.2, iPadOS 17.2, tvOS 17.2, macOS 14.3 or above is required. Apple®, iPadOS®, macOS®, and tvOS® are trademarks of Apple Inc., registered in the U.S. and other countries.


Bluetooth connection

1. Turn the mode switch to Mobile/Bluetooth position.
2. Press the Xbox button to turn on the controller.
3. Hold the Pairing button for 3 seconds to enter the pairing mode, the LED indicator will blink rapidly. (This is required for the very first time only.)
4. Go to your Apple device's Bluetooth list and pair with [8BitDo Ultimate 3mode Xbox], the LED indicator will stay

solid when the connection is successful.

Volume Control

- Press and hold the following button combos to adjust the balance between voice and game volume.
- Beeps when adjusted to maximum/minimum, vibration when adjusted to middle value.
- 3.5mm earphones are not supported when connected via Bluetooth.
- Press and hold the Profile button + D-pad up/down to turn up/down in-game volume.
- Press and hold the Profile button + D-pad left/right to adjust the balance between voice and game volume.

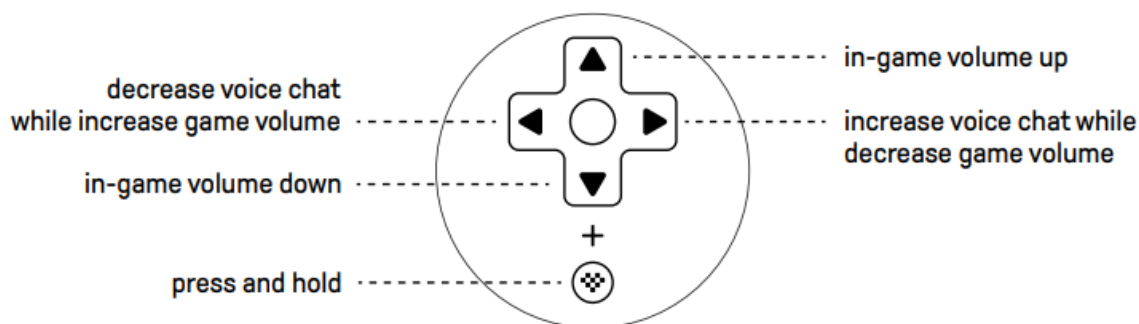

Fast Button Swap

- The Fast Button Swap feature is temporary and will revert to default settings upon reconnection. For permanent button configuration, please use Ultimate Software X.
- The Profile LED indicator will blink continuously when the swapped button is pressed.
- Only the A, B, X, Y, LB, RB, LSB and RSB buttons are supported for button swap.
- Press and hold any of the two buttons, then press the Star button to activate the Fast Button Swap. Repeat the same procedure or reconnect the controller will deactivate the function.

P1/P2 Button Configuration

- Only one button on the controller can be remapped to the P1/P2 button; remapping multiple buttons are not supported.
- Only the A, B, X, Y, LB, RB, LSB and RSB buttons are supported for button swap.
- Press and hold [P1/P2 button + the button you wish to configure], then press the Star button to complete the configuration. To cancel, press and hold [P1/P2 button + Star button].

Battery



Built-in 1000mAh rechargeable lithium battery with 20 hours of play time over 2.4G connection and 25 hours over Bluetooth connection, with a charging time of 4 hours.

controller status –		LED indicator –	
Low battery	→	Red LED blinks	
Battery charging	→	Green LED blinks	
Battery fully charged	→	Green LED stays solid	
The LED indicator status of the charging dock			
Charging	→	Amber light stays solid	
Fully charged	→	White light stays solid	

- The controller will automatically shut down if it fails to connect within 1 minute of startup, or if there are no operations within 15 minutes after establishing a connection.
- The controller will not shut down during wired connection.

Ultimate Software X

- Press the Profile button to activate, switch or deactivate the customized profiles. There is no profile in the default setting.
- Please visit app.8bitdo.com to access the application. It offers elite control over every aspect of your controller: customize button mapping, adjust the sensitivity of analog sticks and triggers, and control vibration intensity.

Re-pair the Controller and Adapter

If the connection is lost or the adapter needs to be re-paired, you can follow the steps below to re-pair the controller with the adapter:

1. Turn the mode switch to PC/2.4G position.
2. Connect the 2.4G adapter to your Windows device.
3. Press the Xbox button to turn on the controller.
4. Hold the Pairing button for 3 seconds to enter the pairing mode, the LED indicator will blink rapidly.
5. Both LED indicators on the controller and receiver will become solid when the connection is successful.

Support

- please visit support.8bitdo.com for further information & additional support.



FCC regulatory conformance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

NOTE:

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

RF Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

IC regulatory conformance

This device complies with CAN ICES-003 (B)/NMB-003(B).

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment.

FAQs

Q: How do I know if the controller is connected successfully?

A: The LED indicators on both the controller and the connected device will stay solid upon successful connection.


Q: How can I adjust voice chat and game volume?

A: Use LSB for in-game volume down and RSB for in-game volume up.

Q: How do I configure P1/P2 buttons?

A: Press P1/P2 button along with Star button to set configuration; to cancel, press and hold [P1/P2 button + Star button].

Documents / Resources

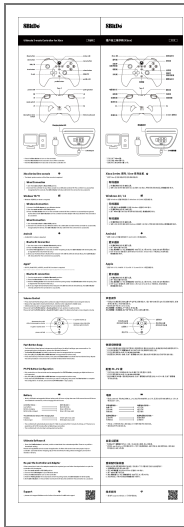

[8BitDo ULT3MX Ultimate 3-Mode Controller for Xbox](#) [pdf] User Guide
ULT3MX, ULT3MX Ultimate 3-Mode Controller for Xbox, Ultimate 3-Mode Controller for Xbox, 3-Mode Controller for Xbox, Controller for Xbox, Xbox

References

- [❖](#)
- [❖ Ultimate Software 8BitDo](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.