

a-n-d com BUTTON 90 Wall Ceiling Button Instruction Manual

[Home](#) » [a-n-d com](#) » a-n-d com BUTTON 90 Wall Ceiling Button Instruction Manual 

a-n-d com BUTTON 90 Wall Ceiling Button



Contents

- [1 INSTALLATION NOTES](#)
- [2 COMPONENTS](#)
- [3 BUTTON OPTIONS](#)
- [4 LED DRIVER OPTIONS](#)
- [5 INSTALLATION](#)
- [6 Customer Support](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

INSTALLATION NOTES

The luminaire is powered by 12V DC. A constant voltage LED driver is required to operate the luminaire. The LED driver varies depending on input voltage and dimming requirements.

It is recommended that two people install the Button Ceiling/Wall; one to gently support the luminaire while the other makes the electrical and mechanical connections to the ceiling.

For questions regarding installation, please email info@a-n-d.com



CARE INSTRUCTIONS

Always wear clean gloves when handling the luminaire. Clean finished surfaces with a soft, lint free cloth. Clean acrylic diffuser with a soft lint-free cloth and a diluted solution of warm water and dish soap.

For replacement parts contact A-N-D directly.

WARNING




The luminaire must be installed by a qualified electrician in a dry indoor location.

Failure to meet any or all of these criteria will not only damage the luminaire, but will void both the warranty and all of its certifications.

COMPONENTS


1. BACKPLATE
2. #8 SCREWS (2)
3. LED DRIVER
4. CANOPY SCREWS (3)
5. WIRE NUT (4)
6. ELECTRICAL CORD
7. CANOPY
8. LUMINAIRE BODY
9. ACRYLIC DIFFUSER
10. ROPE

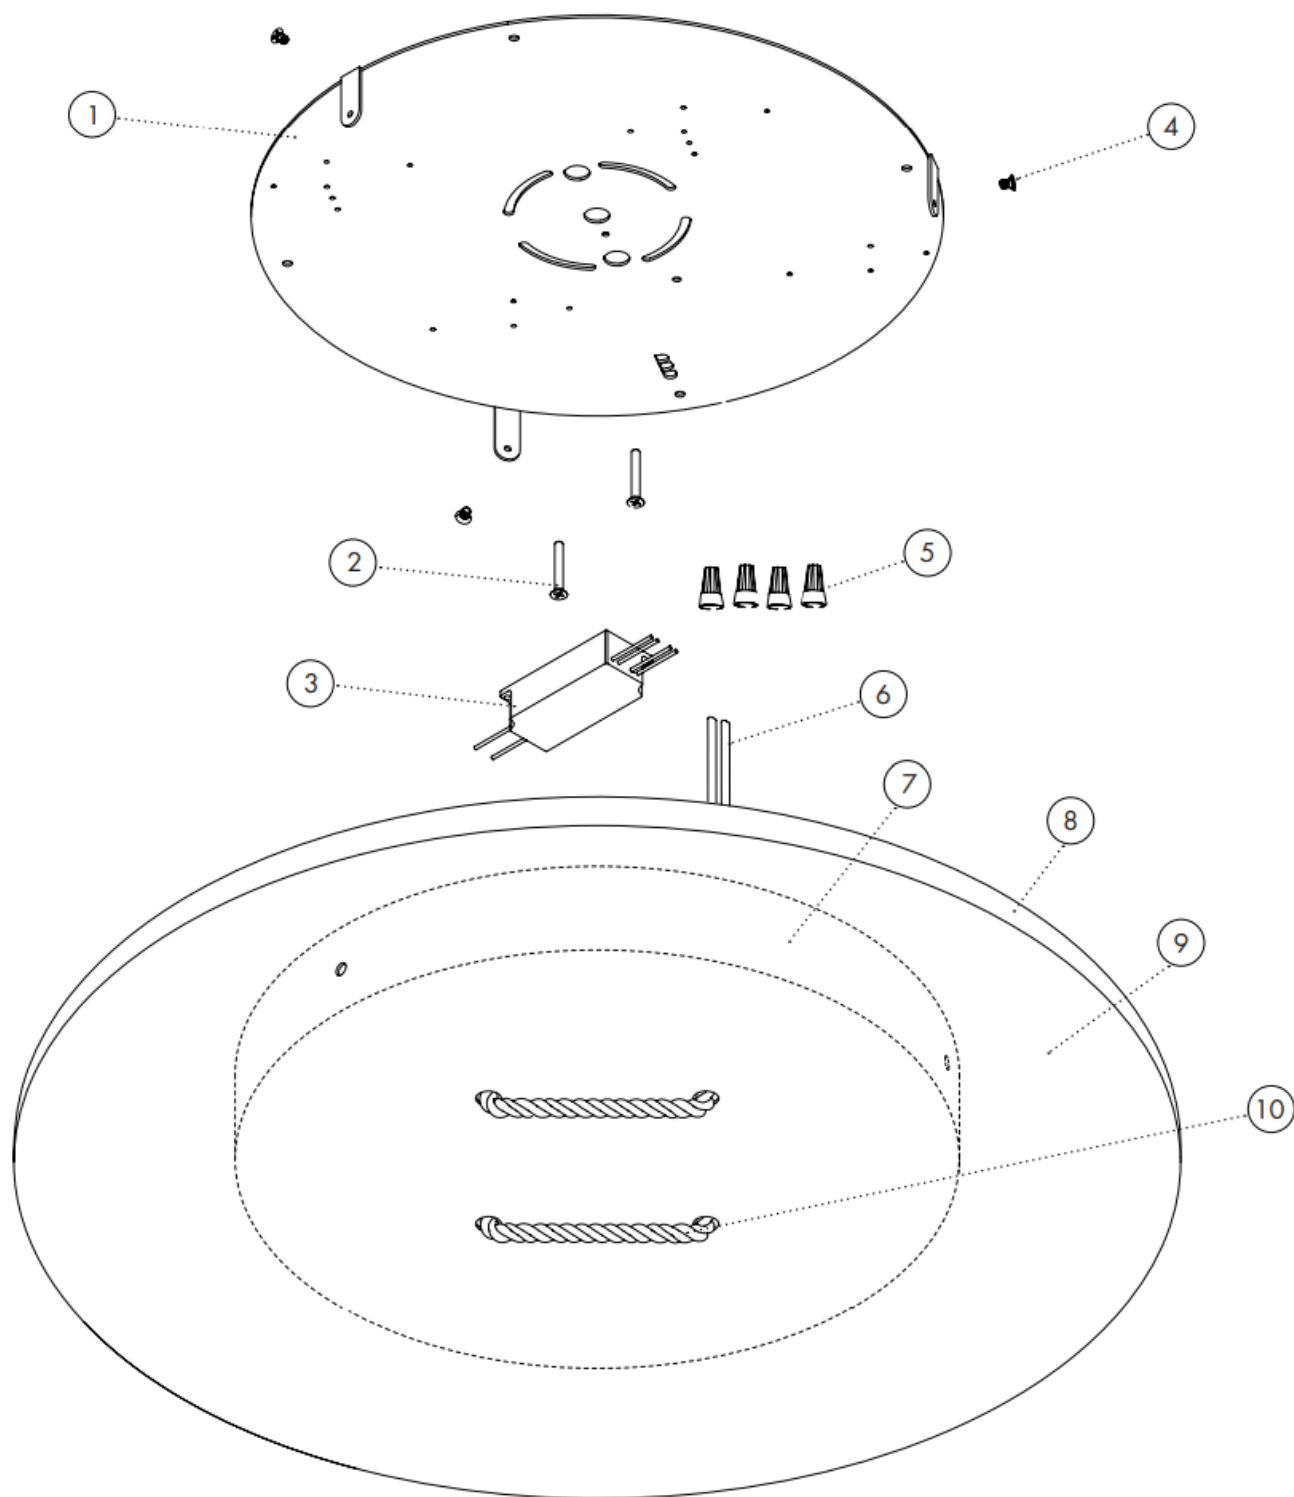

BUTTON OPTIONS


There are 2 sizes for the Button Ceiling/Wall.

- BUTTON 60

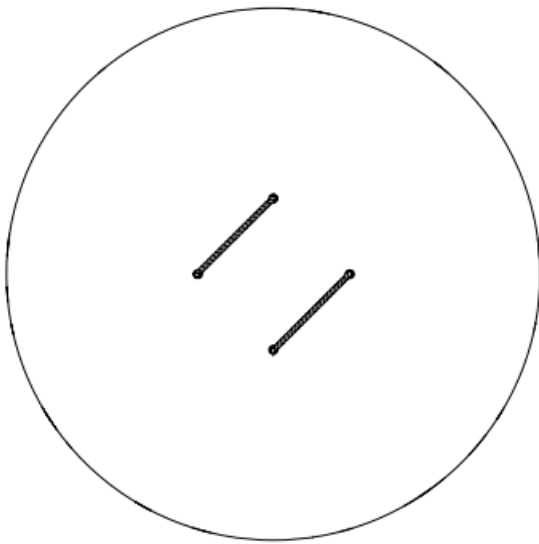


60cm : 25.5"

- BUTTON 90

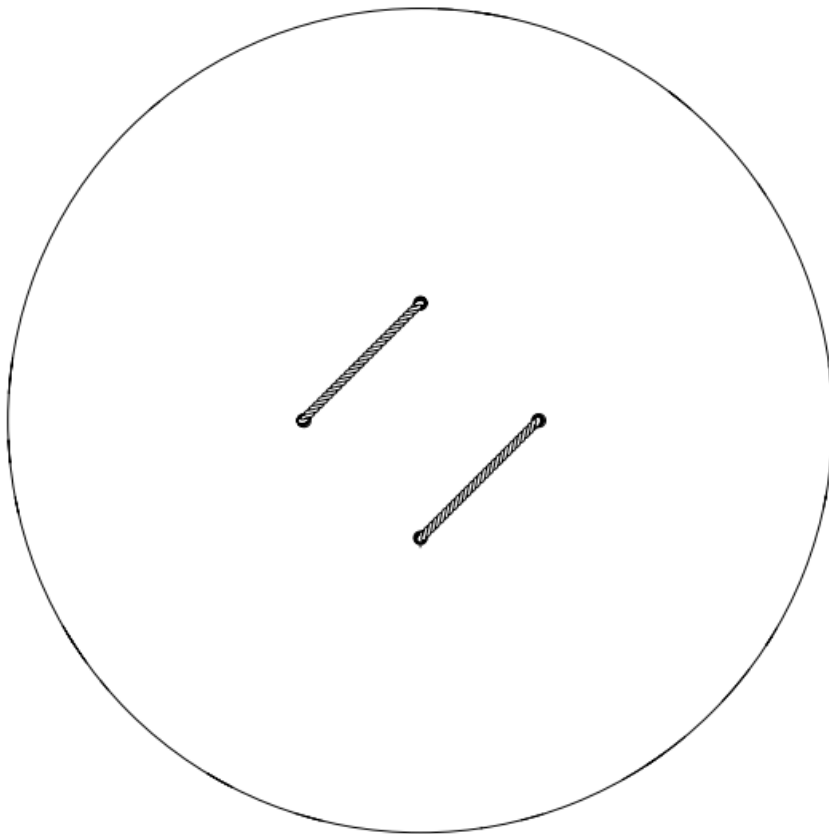

90cm : 35.5"

The model can be mounted two ways, either on the ceiling or on the wall.



7.5cm
3"

LED DRIVER OPTIONS


The Button Ceiling/Wall LED driver varies depending on dimming requirements and input voltage. Use the ordering code to determine the selected driver:

ie. BUT-90-CW-BK-27-010-230


DIMMING - - - - - INPUT VOLTAGE

PHASE CUT DIMMING (PC)

M-30 SERIES – ES POWER
INPUT: 230VAC
OUTPUT: 12VDC,40W
L x W x H: 111 x 44 x 32

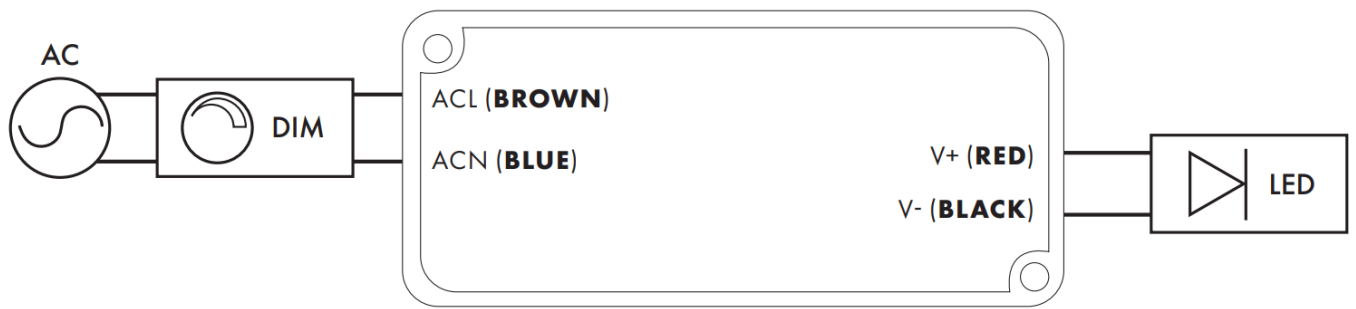


0-10 + PWM DIMMING (010)
 Q40-P SERIES – ES POWER
 INPUT: 110-277VAC
 OUTPUT: 12VDC,40W
 L x W x H: 111 x 44 x 32

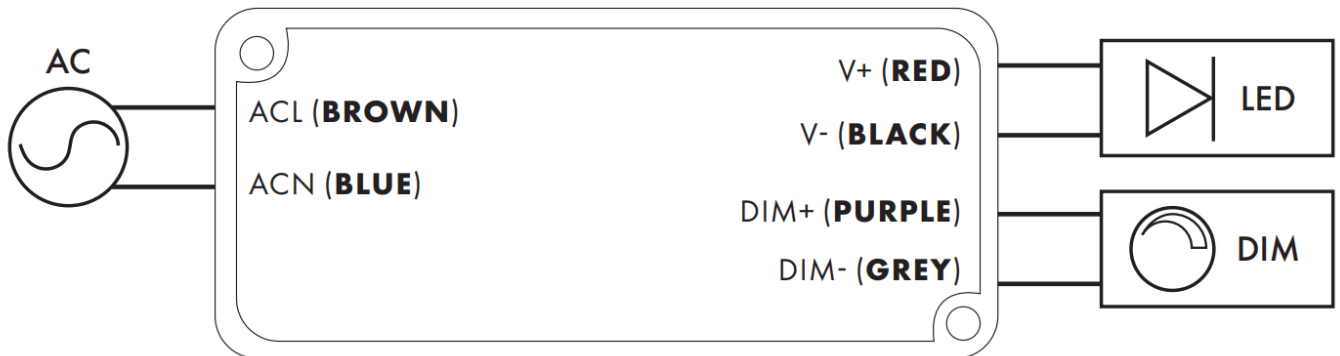


INSTALLATION

STEP 1

Determine the orientation of the luminaire.
 The rope is a visual element and can be oriented in one of three directions.

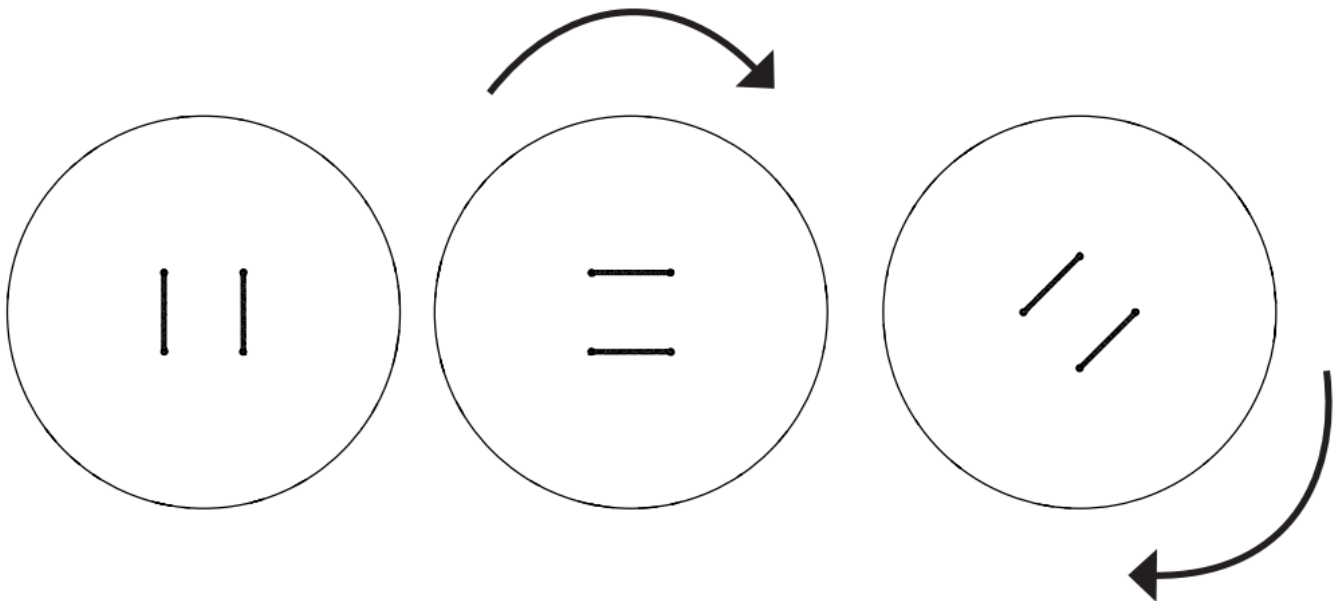

The position of the luminaire is determined by the position of the backplate.
 The backplate allows for almost 360 degrees rotation.

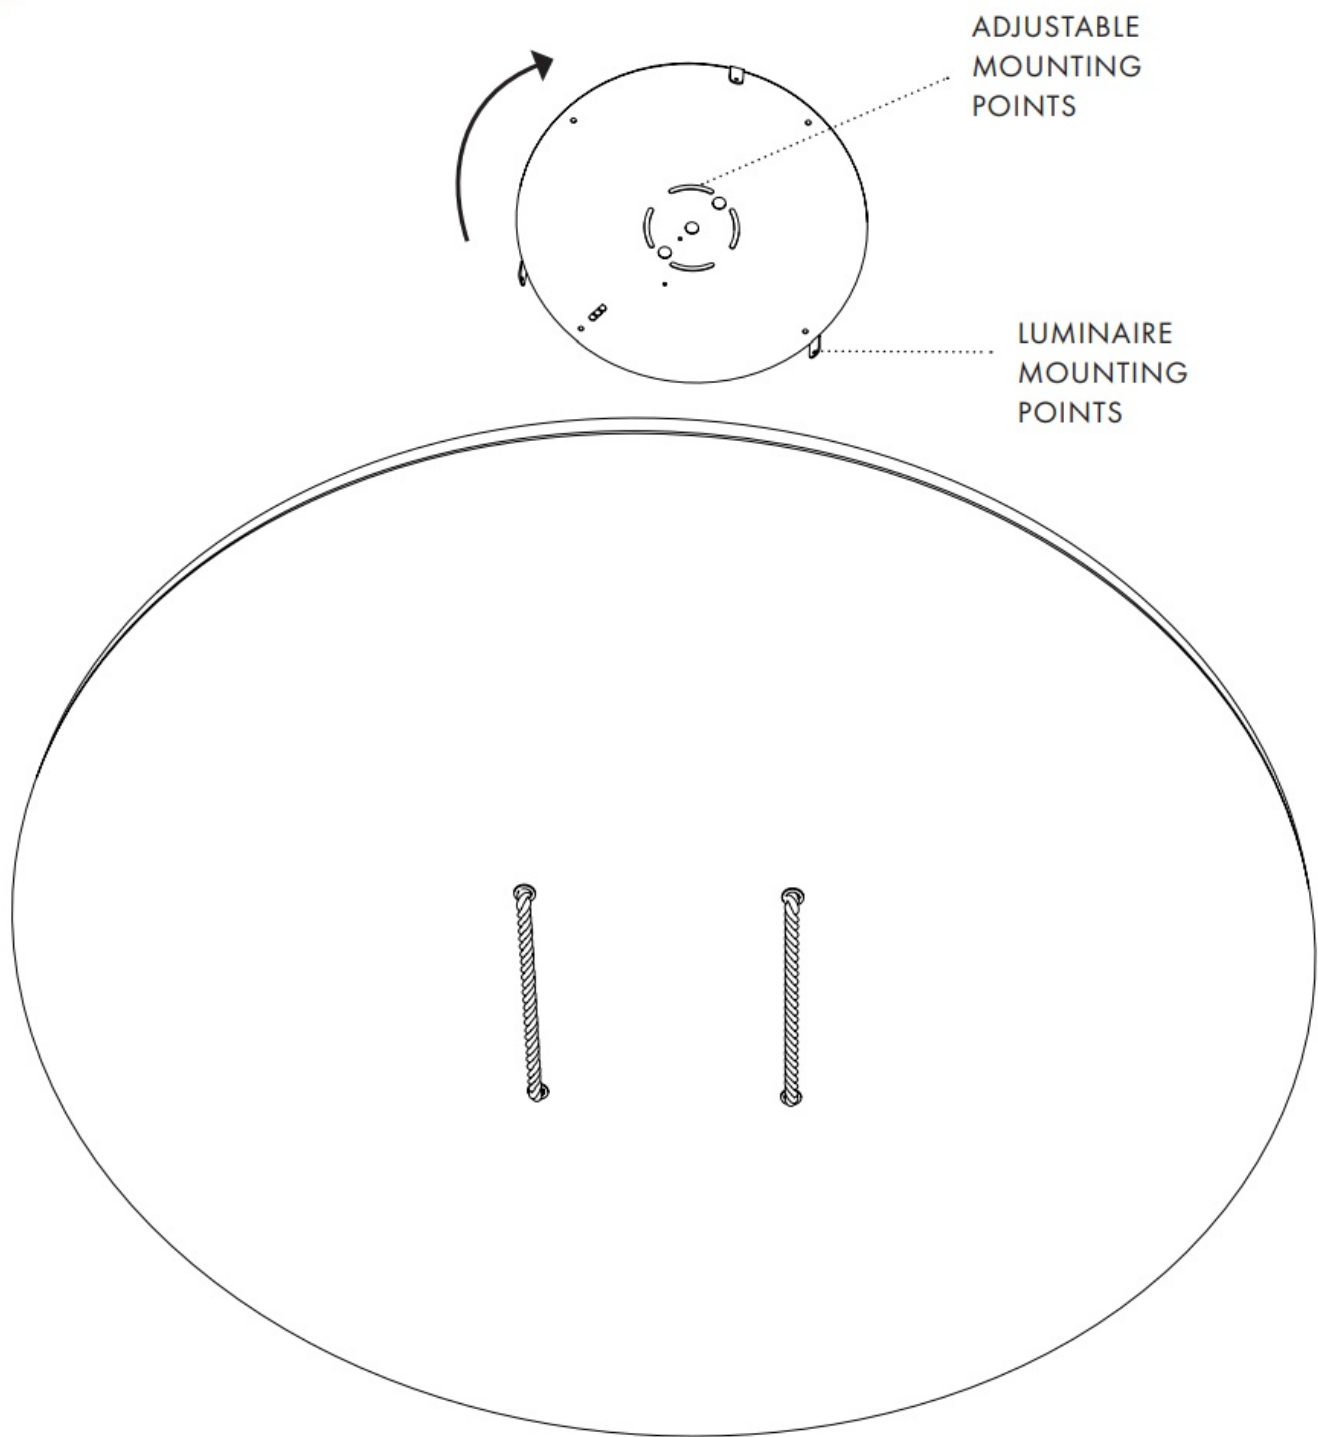


STEP 2

Mount the backplate to the ceiling or wall surface.
Use the provided #8 screws.
Anchors to be provided by installer.



Caution!


Ensure that the power is disconnected.

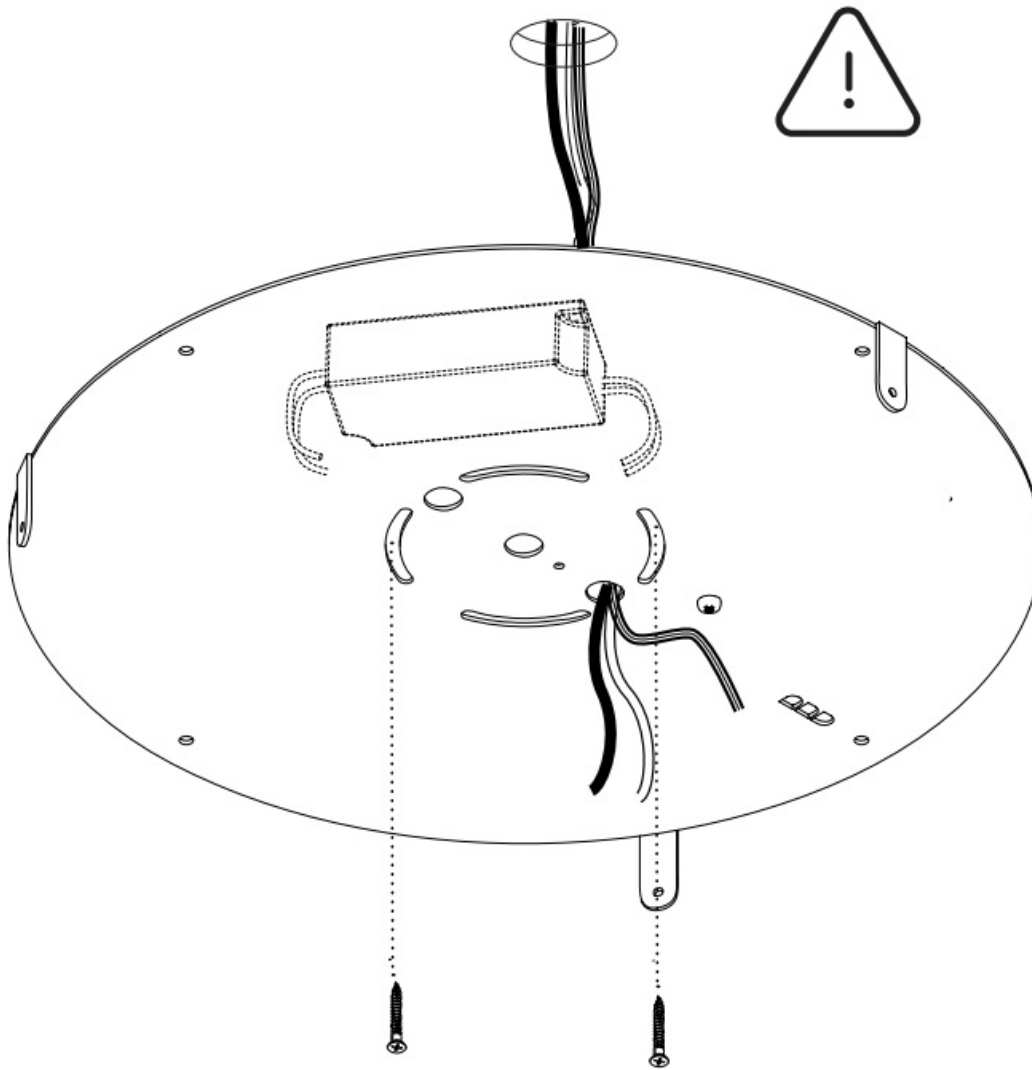

STEP 3

Connect the primary circuit on the LED driver to input power. Connect ground.

Black/brown wire = Line **L**
White/blue wire = Neutral **N**
Green screw = Ground **G**

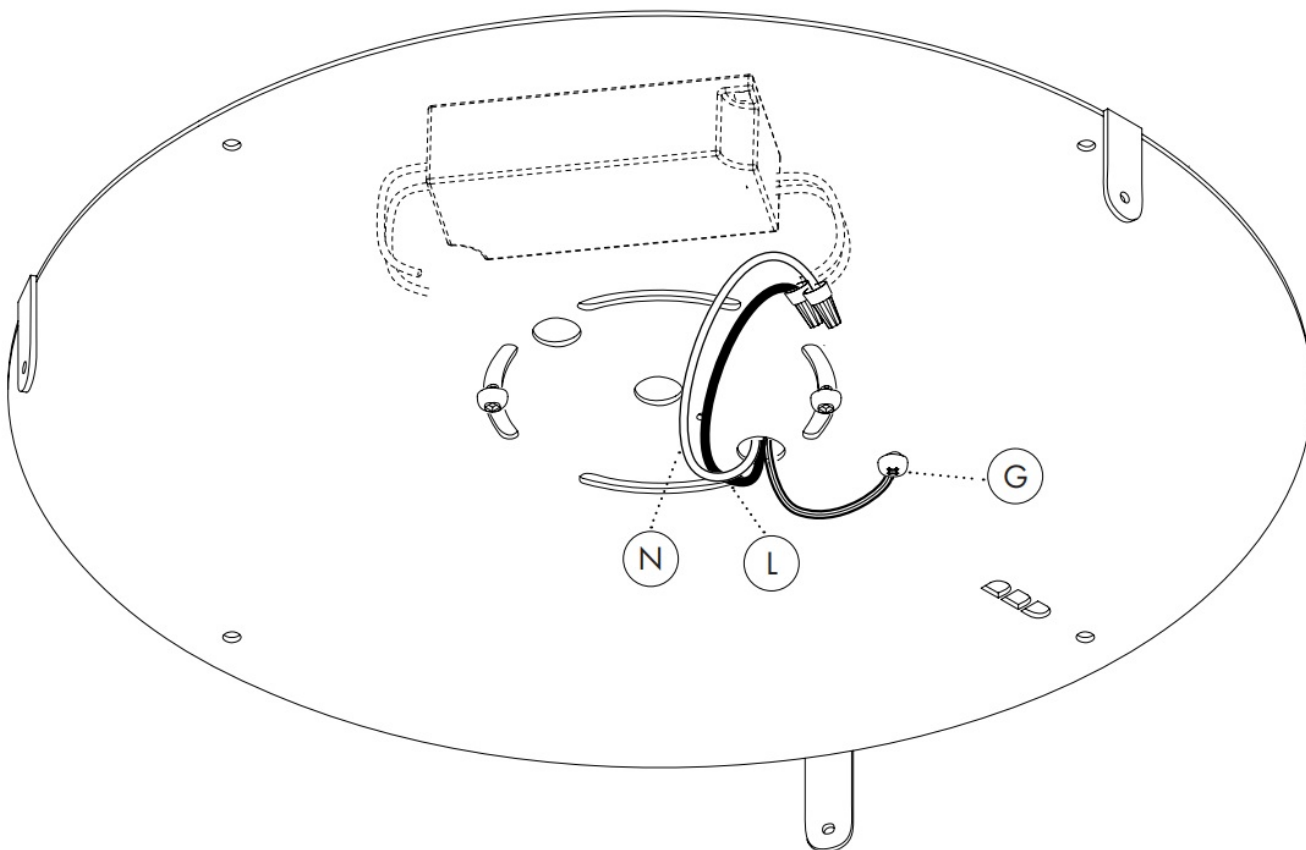


STEP 4

Connect the luminaire to secondary circuit on LED driver.


Dashed line = Positive **V+**

Black = Negative **V-**

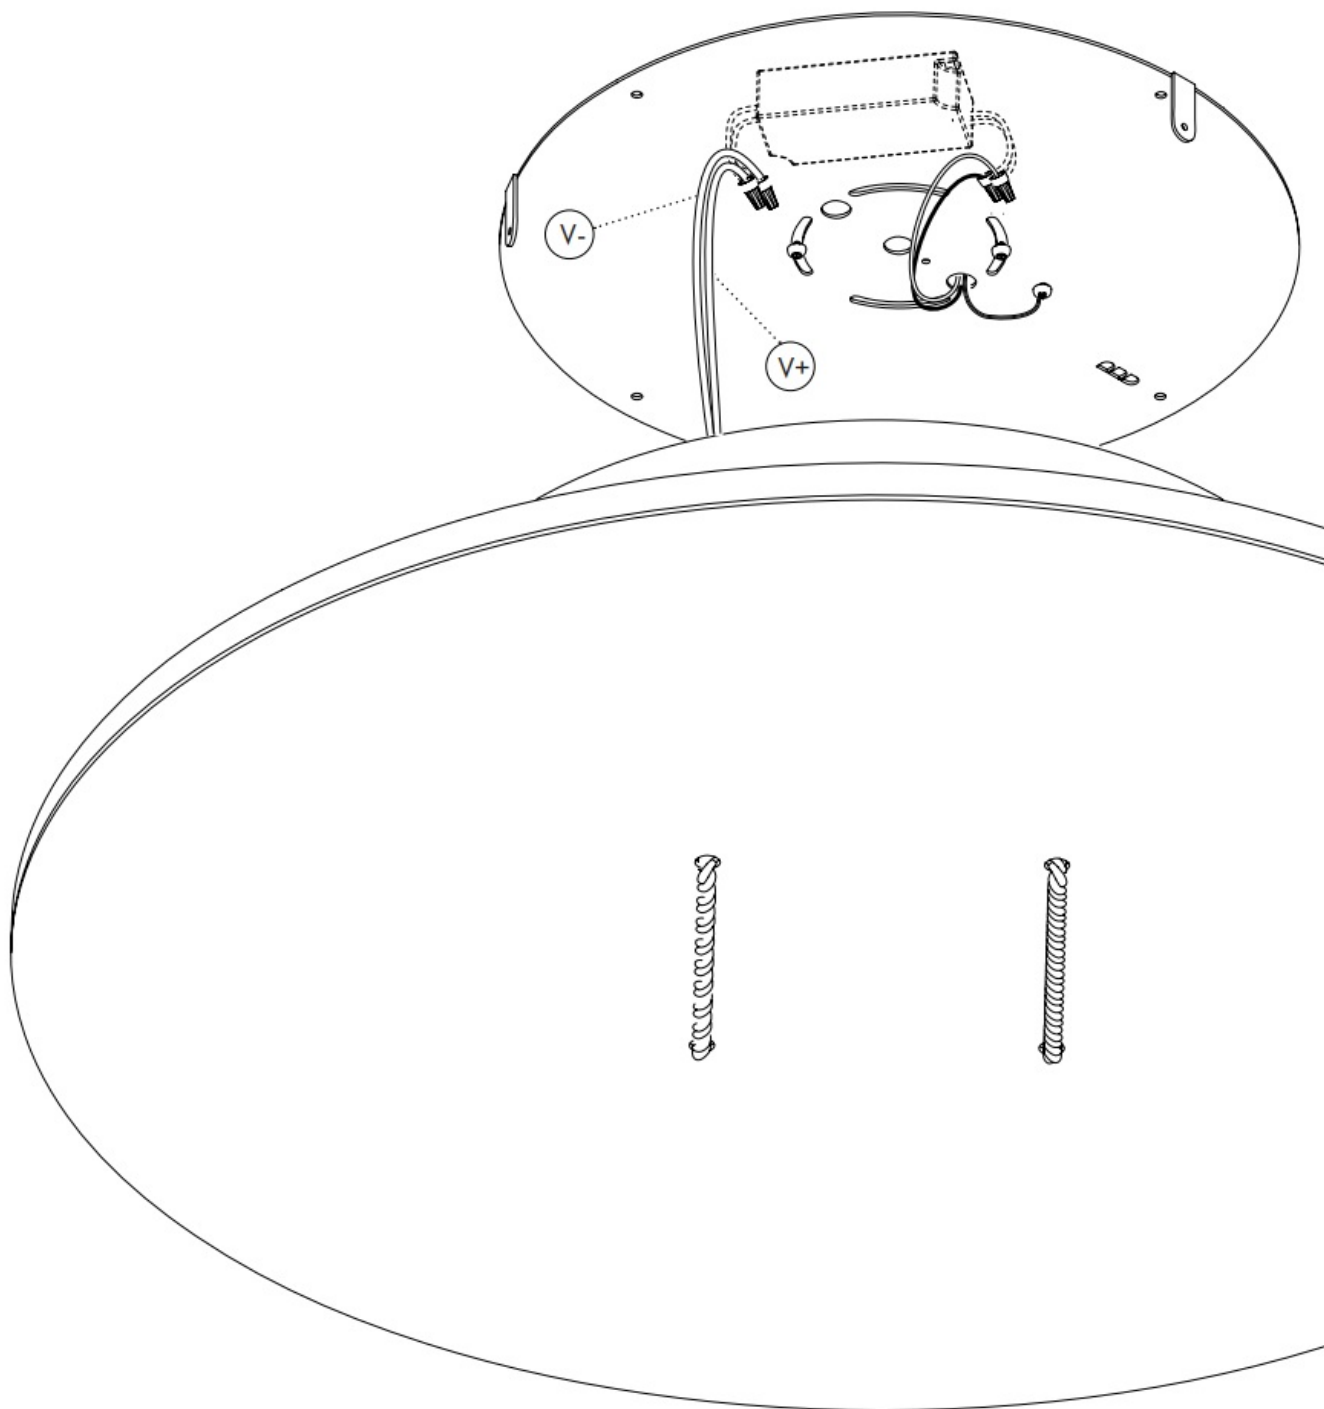

STEP 5

Attach the luminaire to the backplate.
Use the provided colour matched canopy screws.

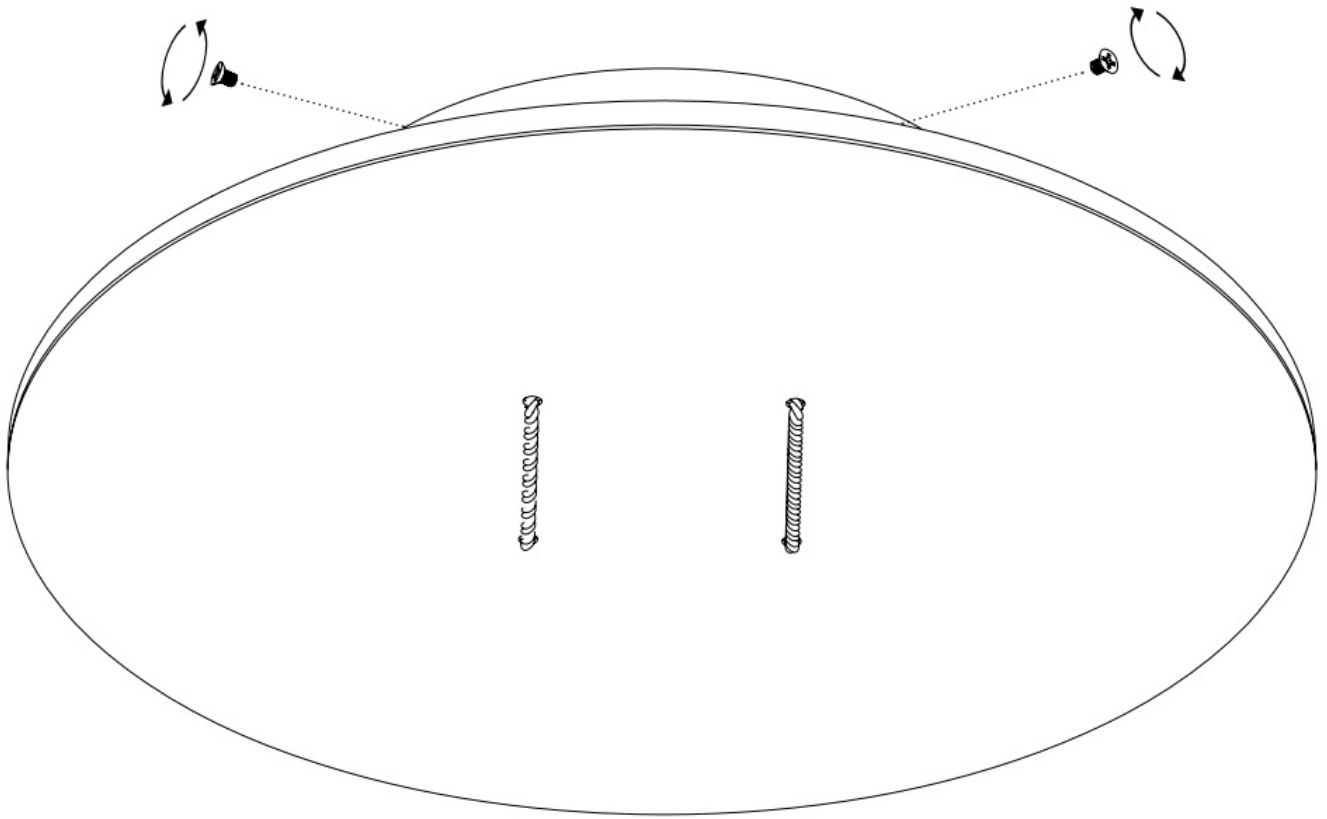

Customer Support

For support, please contact: info@a-n-d.com

+1 604 563 6938

A-N-D

1951 Franklin St,

Vancouver, BC

Canada V5L 0C7


INSTRUCTIONS

SCAN HERE





Documents / Resources

	<p>a-n-d com BUTTON 90 Wall Ceiling Button [pdf] Instruction Manual BUTTON 60, BUTTON 90, BUTTON 90 Wall Ceiling Button, Wall Ceiling Button, Ceiling Button, Button</p>
---	--

References

- [A-N-D decorative luminaire design studio and manufacturer in Vancouver, Canada](#)
- [Telepathy - Powering Successful Brands](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.