



A4X-L3560 Battery Camera User Guide

Home » A4x » A4X-L3560 Battery Camera User Guide

Contents

- 1 A4X-L3560 Battery
- Camera
- 2 In the Box
- **3 Introduction**
- **4 Product Overview**
- **5 Set Up Your Camera**
- **6 Mount Your Camera**
- **7 FCC STATEMENT**
- 8 Warranty
- 9 Documents / Resources
 - 9.1 References
- **10 Related Posts**




A4X-L3560 Battery Camera



In the Box


After opening the box, please check the following pictures to see if the accessories are complete.

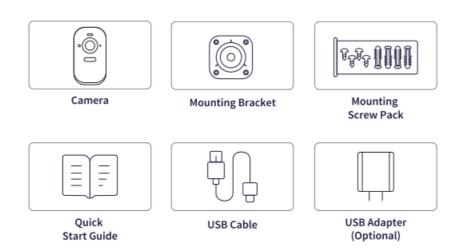

Introduction

- 1. Battery Powered and RTOS System With a built-in PIR module and RTOS system the battery camera can work for 3 months if it has been triggered 20 times per day after a full charging.
- 2. Completely Wireless: It doesn't need any cable for line power or network.
- 3. Excellent Clarity: 2K(2304*1296) Ultra HD Resolution.
- 4. Color Night Vision: The hardware has built-in IR LEDs and spotlights that allow you to capture a color image even at night.
- 5. Storage: Support local storage and cloud storage.

Product Overview

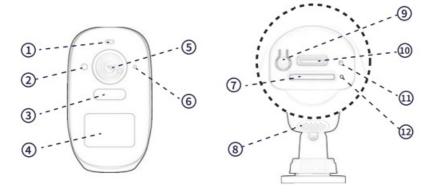

- 1. Status LED
- 2. Photosensitive Sensors
- 3. Spotlights
- 4. PIR
- 5. Lens
- 6. Microphone
- 7. Micro SD Card Slot
- 8. Speaker
- 9. Power Button
- 10. Power Input
- 11. Reset Button
- 12. Charging Indicator

Status LED	Description
Slow blinking red	Ready to connect
Fast blinking red	Disconnected from the internet
Slow blinking blue	Connected to the router successfully
Solid blue	The camera has been added successfully and is working normally
Flashing blue and red alternately	A firmware update is in progress

Charging Indicator	Description	
Solid red	Battery is charging	
Solid blue	Charging completed	
Flashing indicator light	Charging failure	

Basic Parameters

Active Pixels	2304*1296	Storage	TF Card (Max 128G)
Clarity Resolution	ЗМР	Wi-Fi	Only 2.4GHz Wi - Fi
FOV(D)	122°	Network Security	WPA - PSK /WPA2-PSK
Lens	3.5mm@F2.0	Battery Capacity	5200mAh
IR LED	8m	Item Weight	233g
Spotlights	8m	Product Dimensions	87(L)*53(W)* 84(H) mm
Audio	MIC/Speaker	Charging Power	DC5V - 1A, Type-C
PIR	8m(100°)	Mounting Type	Wall Mount
Water Proof	IP66	Working Temp	- 20~+50°C
Charging Temp	0~45°C		

Set Up Your Camera

Step 1 Download

Download the Tuya Smart or Smart Life App from the Apple App Store or Google Play, or by scanning the QR code below.








Step 2 Connect it to the App


1. Sign up an App account, go to the App homepage, tap Add Device, and select the smart camera(Wi-Fi).



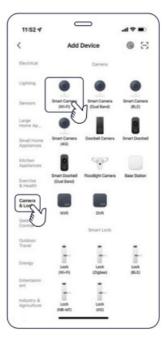

Please follow the prompts of the App to allow relevant permissions, otherwise it will affect the addition and use of the device.

2. Press and hold the power button for 3s until the status LED is slowly blinking red or hears "Waiting to receive the wireless configuration"

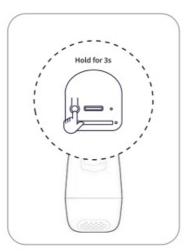



Please choose a 2.4GHz Wi-Fi, the camera does not support the 5GHz Wi-Fi.

3. Please click Next, select a stable network and enter a password. The camera of the device scans the QR code generated by the mobile phone, keeps a distance of 15 to 20cm and does not move until the sound of "Di" is heard, and finally follows the steps on the App to complete the addition.




When adding devices, please make the camera and mobile phone connect to the same Wi-Fi router.

Mount Your Camera

Select a location

The camera can be mounted on a wall or ceiling. Choose a spot where you can get the desired view. Make sing to pick a place within at you your home network. Please try We recommend hanging it 2.5m (8.2 ft) above the ground and maintaining an angle of about 25 degrees from the horizontal ground.

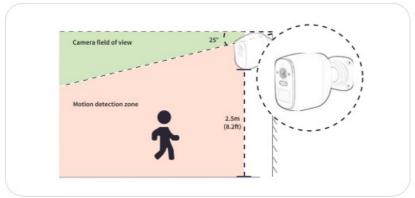


To mount the Camera on the wall

Step 1

Align the mounting plate and mark the four circles where the holes need to be drilled.

Step 2


circles. Drill four holes above the four marked

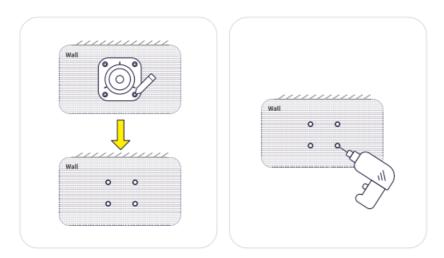

Step 3 Insert four anchors into the holes and use the screws to affix the bracket over the anchors.

Step 4

Align the hole at the bottom of the camera with the mounting bracket, and turn the camera clockwise to fix the camera to the mounting bracket. Rotate the camera to adjust the view and check it using the live stream which you can access in the App.

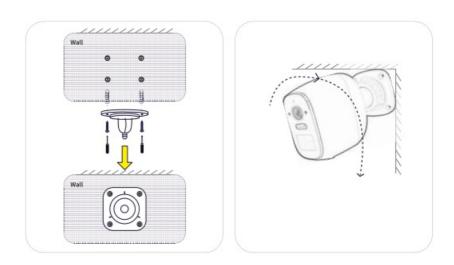


To mount the Camera on the ceiling:

Please follow the steps 1-6 to secure the camera onto the ceiling.

How to Remove Your Camera:

Hold the main body of the camera, then rotate anticlockwise to remove the camera from the mounting bracket.

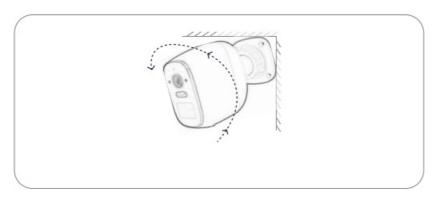

Notice

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20cm between the radiator & your body.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Siren function

After the alarm function is turned on in the App, the camera will sound an audible alarm after detecting an event. If you do not need it, you can turn off this function in the App.

App device settings

When the device parameters are set in the App, they will only take effect after the device goes to sleep and wakes up next time. For example, you turn on the Siren function in the App settings, which can only be turned on after the device wakes up next time.

CAUTION

Risk of fire or explosion if the battery is replaced by an incorrect type. Avoid replacing a battery with an incorrect type that can defeat a safeguard Avoid disposal of a battery into a fire or a hot oven, or mechanically crushing or cutting off a battery, which can result in an explosion. Do not leave a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; Do not leave a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

Customer Service

Warranty

12-month Limited Warranty

Documents / Resources



A4X A4X-L3560 Battery Camera [pdf] User Guide A4X-L3560, A4X-L3560 Battery Camera, Battery Camera, Camera

References

User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.