



acer CB2 series/CBL282K LCD Monitor User Guide

[Home](#) » [Acer](#) » acer CB2 series/CBL282K LCD Monitor User Guide 

acer

LCD Monitor CB2 series/CBL282K
USER GUIDE



Acer LCD Monitor Quick Start Guide (QSG)

Contents

- [1 Important safety instructions](#)
- [2 Attaching the monitor to the base](#)
- [3 Connecting your monitor to a computer](#)
- [4 FreeSync\(DP/HDMI\):](#)
- [5 External controls](#)
- [6 Regulations and safety notices](#)
- [7 SPECIFICATION](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)


Important safety instructions

Please read the following instructions carefully.

1. To clean the LCD monitor screen:
 - Turn off the LCD monitor and unplug the power cord.
 - Spray a non-solvent cleaning solution onto a rag and clean the screen gently.
2. Do not place the LCD monitor near a window. Exposing the monitor to rain, moisture or sunlight can severely damage it.
3. Do not apply pressure to the LCD screen. Excessive pressure may cause permanent damage to the display.
4. Do not remove the cover or attempt to service this unit yourself. An authorized technician should perform servicing of any nature.
5. Store the LCD monitor in a room with a temperature of -20° to 60° C (-4° to 140° F). Storing the LCD monitor outside this range may result in permanent damage.
6. Immediately unplug your monitor and call an authorized technician if any of the following circumstances occur:
 - Monitor-to-PC signal cable is frayed or damaged.
 - Liquid spills onto the LCD monitor or the monitor is exposed to rain.
 - The LCD monitor or case is damaged.

Attaching the monitor to the base

1. Remove the monitor from the packaging.
2. Attach the foot stand to the base. (for selected models).
3. Turn clockwise to lock. Ensure that the base is locked onto the stand. (for selected models)
4. Secure the base to the stand by turning the screw using the integrated tab or a suitable coin. (for selected models)

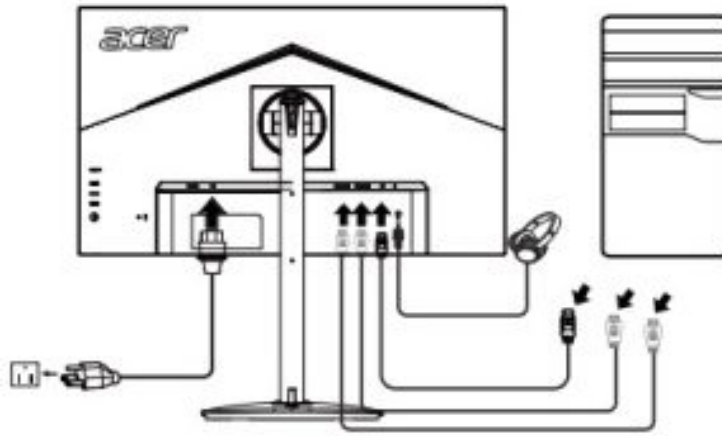

Connecting your monitor to a computer

1. Turn off your computer and unplug your computer's power cord.
2. Connect the signal cable to the DP (optional) and/or HDMI (optional) input socket of the monitor, and the DP (optional) and/or HDMI(optional) output socket of the graphics card on the computer. Then tighten the thumbscrews on the signal cable connector.
3. Optional: Connect the audio input socket (AUDIO IN) of the LCD monitor and the line-out port on the computer with the audio cable.
4. Insert the monitor power cable into the power port at the back of the monitor.
5. Plug the power cords of your computer and your monitor into a nearby electrical outlet.







Note: Audio output is only for the audio output model. Please check the user manual for more instructions.

FreeSync(DP/HDMI):

It can allow a FreeSync supported graphics source to dynamically adjust display refresh rate based on typical content frame rates for power-efficient, virtually stutter-free, and low-latency display update.



External controls

1	Power button	Turns the monitor on/off. Blue indicates power on. Amber indicates standby/ power saving mode.
2	Function key 	a. Press to view the Main page. Press again to enter the hotkey1 function. b. When the Function Menu is active, press this key to view the basic information for your monitor and current input or reset the custom color settings to the factory defaults.
3	Function key 	a. Press to view the Main page. Press again to enter the hotkey2 function. b. When the Function Menu is active, press this button to select scenario mode or game mode.
4	Function key 	a. Press to view the Main page. Press again to enter the Input select function. b. When the Function Menu is active, this button will quit the OSD.
5	Function key 	a. Press to view the Main page. Press again to enter the next function in the Function Menu. b. The single toggle button on the backside of the Display bezel operates like a joystick. To move the cursor, simply toggle the button in four directions. Press the button to select the desired option. Bright gray indicates operable. Dark gray indicates inoperable.

Regulations and safety notices

FCC notices

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

CE declaration of conformity

Hereby, Acer Inc., declares that this LCD monitor is in compliance with the essential requirements and other relevant provisions of EMC Directive 2014/30/EU, Low Voltage Directive 2014/35/EU, and RoHS Directive 2011/65/EU and Directive 2009/125/EC with regard to establishing a framework for the setting of ecodesign requirements for energy-related product.

Notice: Shielded cables

All connections to other computing devices must be made using shielded cables to maintain compliance with EMC regulations.

Notice: Peripheral devices

Only peripherals (input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this equipment. Operation with non-certified peripherals is likely to result in interference to radio and TV reception.

Caution

Changes or modifications not expressly approved by the manufacturer could void the user authority, which is granted by the Federal Communications Commission, to operate this product.

In order to prevent damage to the monitor, do not lift the monitor by its base.

Operation conditions

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice: Canadian users

CAN ICES-3(B)/NMB-3(B)

Disposal of waste equipment by the user in a private household in the European Union

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

Acer monitor is purposed for video and visual display of information obtained from electronic devices.


SPECIFICATION

LCD Panel	Driving system	TFT Color LCD
	Size	28"W (71cm)
	Pixel pitch	0.16mm(H) x 0.16mm(V)
	Brightness	300cd/m ² (Typical)
	Contrast	100,000,000:1Max. (ACM)
	Viewable angle	178° (H) 178° (V) (CR=10) (Typical)
	Response time	4ms (G to G)
	Panel Type	In-Plane Switching
	H-Frequency	HDMI:30-160KHz DP:160-160KHz
	V-Frequency	40-60Hz
Display Colors		1.07B Colors
Dot Clock		600MHz
Max. Resolution		3840×2160@60Hz
Plug & Play		VESA DDCCI/DDC2B
Power consumption @20 0cd/m ²	ON Mode	31W(typ.)
	Standby mode	0.5W(typ.)
	Off Mode	0.35W(typ.)
Input Connector		DP (Only DP Model)(Optional) HDMI (Only HDMI Model)
Input Video Signal		DP (Only DP Model)(Optional) HDMI (Only HDMI-Input Model)
Speakers		2W x 2
Audio		Audio-Output (Only Audio-Output Model)
Maximum Screen Size		Horizontal:620.928mm Vertical:341.28mm
Power Source		100-240W, 50/60Hz
Environmental Considerations		Operating Temp: 0° to 40°C Storage Temp: -20° to 60°C Operating Humidity: 20% to 80%

Dimensions		637(W) x 437-567(H) x 269 (D)mm	
Weight (N. W.)		7.25kg Unit (net)	
Mechanism spec		Tilt: -5° to +35° Swivel: Yes Height adjustment: 130mm Pivot: Yes Detachable foot stand: Yes	
External Controls:	Functions	Brightness Contrast Black Boost Blue Light CM HDR Super Sharpness Auto Config H. Position V. P osition Focus Clock Gamma Color Temp. Modes sRGB Mode Grayscale Mod e 6-axis Hue 6-axis Saturate	Volume Mute OverDrive FreeSync VRB Refresh Rate Num Language OSD Timeout Transparency OSD Lock Input Auto Source Wide Mode Hot K ey Assignment DDC/CI HDMI Black Level Quick Start Mode Reset
*Specifications may vary depending on model, SKU, and/or region.			

Find manuals and other documents for your Acer product on the official Acer support website.

Documents / Resources

 <p>LCD Monitor CBL282K series/CBL282K USER GUIDE</p>	<p>acer CB2 series/CBL282K LCD Monitor [pdf] User Guide CB2 series, CBL282K, LCD Monitor</p>
---	--

[Manuals+](#)