


acer MC.JPH11.003 Projector Lamp with Module User Guide





Contents

- [1 Quick Start Guide](#)
 - [1.1 INSTALLATION](#)
 - [1.2 SPECIFICATIONS](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)

Quick Start Guide

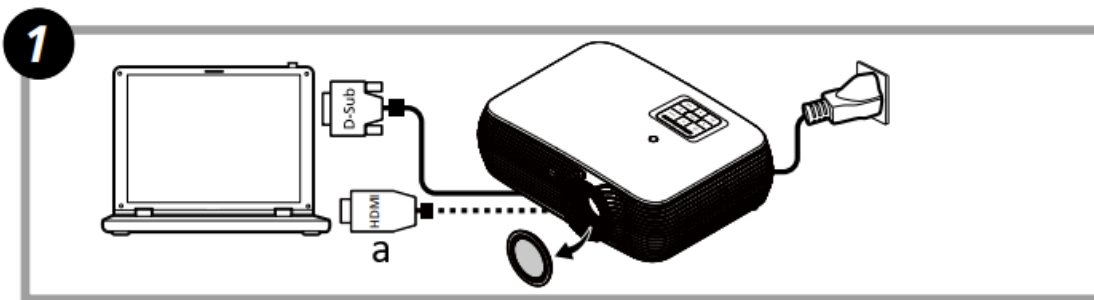


a: or HDMI

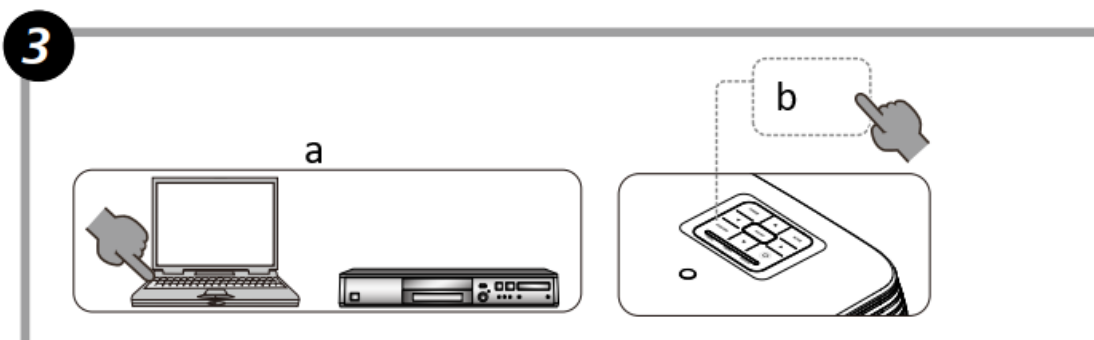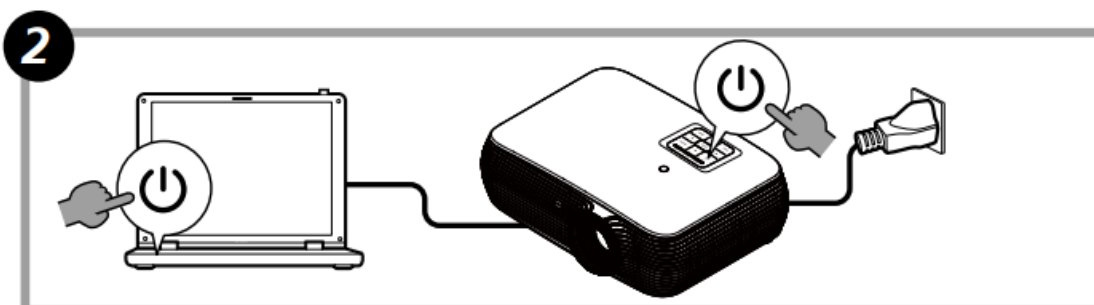

a: Input Source

b: SOURCE


4

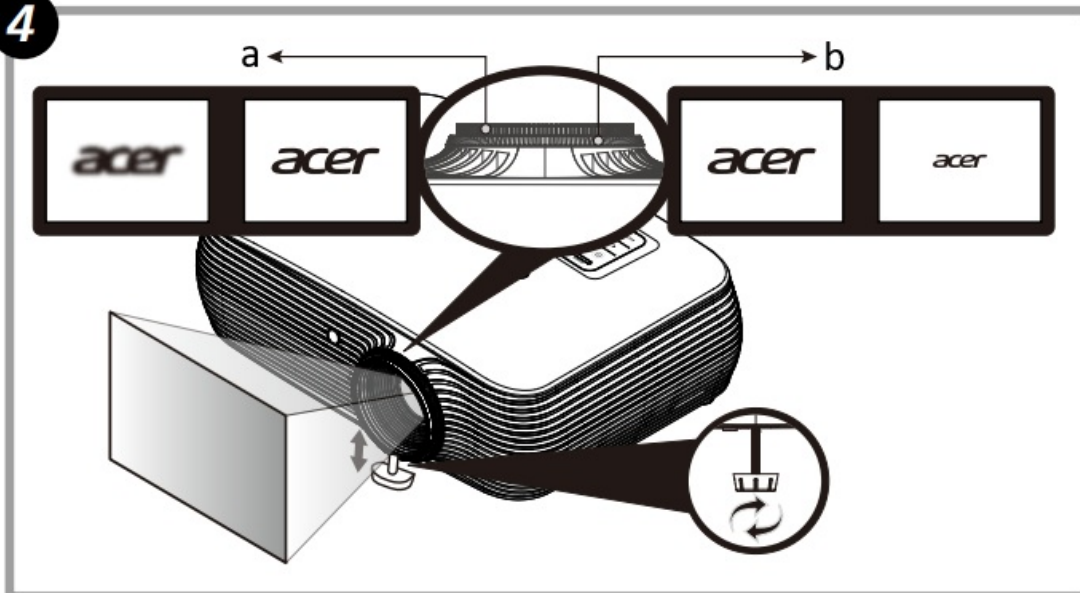

a: FOCUS

b: ZOOM

INSTALLATION

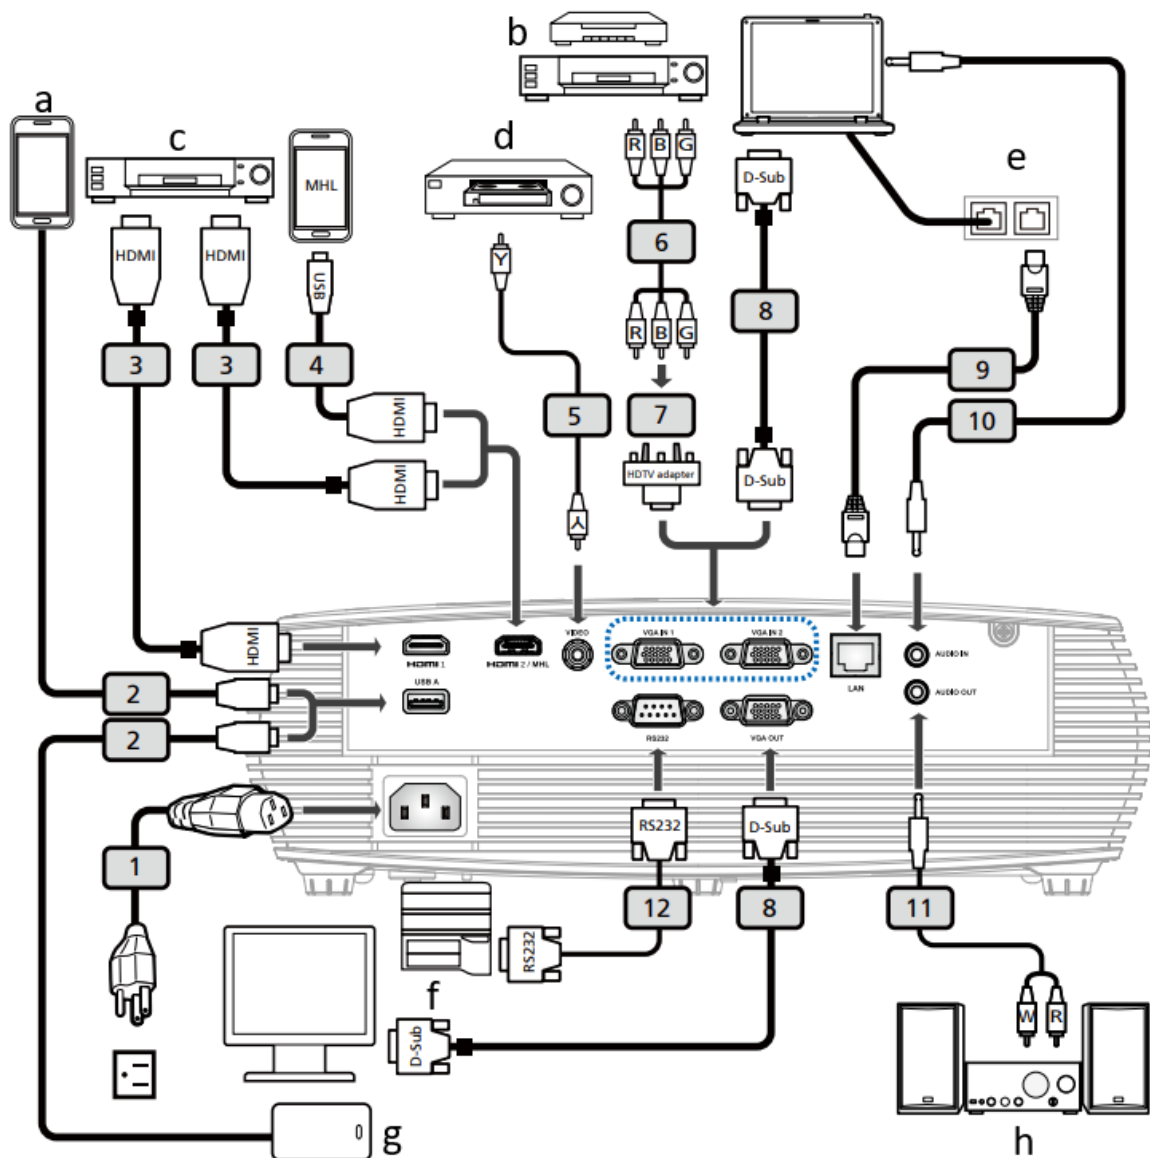

Note: Functions vary depending on model definition.

- a:** Smart Phone
- b:** DVD player, Set-top Box, HDTV receiver
- c:** DVD player
- d:** Video Output
- e:** Internet
- f:** RS232
- g:** Power Bank
- h:** Audio Output




Scan to get user's manual

HDMI® EAC
HIGH-DEFINITION MULTIMEDIA INTERFACE





Recyclable Paper



36.7AH02H001-A
P/N:MC.JPH11.003

SPECIFICATIONS

Projection system	DLP®
Resolution	• P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1024×768 XGA resolution • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1280×800 WXGA resolution • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1920×1080 1080p resolution • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1920×1200 WUXGA resolution
Computer compatibility	IBM PC and compatibles, Apple Macintosh, iMac and VESA standards: SXGA, XGA, VGA, SVGA, SXGA+, WXGA, WXGA+, WSXGA+
Video compatibility	NTSC (3.58/4.43), PAL (B/D/G/H/I/M/N), SECAM (B/D/G/K/K1/L), HDTV (720p, 1080i, 1080p), EDTV (480p, 576p), SDTV (480i, 576i)
Aspect ratio	Auto, Full, 4:3, 16:9, L.Box
Displayable colors	1.07 billion colors
Optical zoom ratio	1.3X
Throw ratio	• P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1.49 ~ 1.93 (66" @ 2m) • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1.19 ~ 1.54 (78" @ 2m) • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1.13 ~ 1.47 (80" @ 2m) • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1.13 ~ 1.47 (82" @ 2m)
Projection lens	F = 2.50 ~ 2.78, f = 16.91mm ~ 21.60mm, Manual Zoom & Focus
Projection screen size (diagonal)	• P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 25" ~ 300" (65cm ~ 762cm) • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 30" ~ 300" (76cm ~ 762cm) • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 31" ~ 300" (78cm ~ 762cm) • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 32" ~ 300" (80cm ~ 762cm)
Projection distance	• P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1.0m ~ 9.1m (3.3' ~ 29.7') • P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1.0m ~ 7.7m (3.3' ~ 25.2') • P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1.0m ~ 7.5m (3.3' ~ 24.6') • P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1.0m ~ 7.3m (3.3' ~ 24.0')
Horizontal scan rate	15 – 100 kHz
Vertical refresh scan rate	24 – 120 Hz
Lamp type	240W user-replaceable lamp


Keystone correction	±20 degrees
Audio	Internal speaker with 16W x 1 output
Weight	2.65 Kg (5.8 lbs)
Dimensions (W x D x H)	315 mm X 214 mm X 98 mm (12.4" x 8.4" x 3.8")
Digital Zoom	2x
Power supply	AC input 100 – 240 V auto-switching power supply
Power consumption	Normal mode: 290W ± 10% @ 110VAC ECO mode: 205W ± 10% @ 110VAC Standby mode < 0.5W Network standby mode: <3W
Operating temperature	e 0°C to 40°C / 32°F to 104°F
Standard package contents	• AC power cord x1 • Remote control x1 • Security card x1 • VGA cable x1 (option) • HDMI cable x1 (option) • Carrying case x1 (option) • AAA battery x2 (for remote control) (option) • User's guide (Projector)(CD-ROM) x1 • Quick start guide (Projector) x1 • User's guide (Media/Wireless function) (CD-ROM) x1 • Quick start guide (Media/Wireless function) x1
I/O connectors	• Power socket x1 • VGA IN x2 • HDMI x1 • HDMI2/MHL x1 • RJ45 LAN input x1 • VGA output x1 • RS232 x1 • 3.5 mm audio jack input x1 • 3.5 mm audio jack output x1 • Composite video x1

Note:

- The specifications listed above are subject to change without notice.
- Find manuals and other documents for your Acer product on the official Acer support website.

Operation: 307.05 Wh (307,05 Wh)

Documents / Resources

 The image shows the cover of the 'Quick Start Guide' for the Acer MC.JPH11.003 Projector Lamp with Module. It features the Acer logo at the top left and four numbered steps (1-4) illustrating the installation process. Step 1 shows the lamp being inserted into the projector. Step 2 shows the lamp being locked. Step 3 shows the projector being turned on. Step 4 shows the projector displaying a test pattern.	acer MC.JPH11.003 Projector Lamp with Module [pdf] User Guide MC.JPH11.003 Projector Lamp with Module, MC.JPH11.003, Projector Lamp with Module, Lamp with Module, with Module, Module
--	---

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.