



ADAMSON S7p Fullrange Point Source Speaker User Manual

[Home](#) » [ADAMSON](#) » ADAMSON S7p Fullrange Point Source Speaker User Manual 

ADAMSON S7p Fullrange Point Source Speaker



Contents

- [1 Safety & Warnings](#)
- [2 S7p Ultra Compact Point Source](#)
- [3 Wiring](#)
- [4 Amplification](#)
- [5 Presets](#)
- [6 Dispersion](#)
- [7 Technical Specifications](#)
- [8 Accessories](#)
- [9 Declarations](#)
- [10 Customer Support](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)

Safety & Warnings



Read these instructions, keep them available for reference.

This manual can be downloaded from

<https://adamsonsystems.com/en/support/downloads-directory/s-series/S7p>



Heed all warnings and follow all instructions.



A qualified technician must be present during the installation and use of this product. This product is capable of producing extremely high sound pressure levels and should be used according to the specified local sound level regulations and good judgement. Adamson Systems Engineering will not be liable for damages caused by any possible misuse of this product.



Servicing is required when the loudspeaker has been damaged in any way, such as when the loudspeaker has been dropped; or when for undetermined reasons the loudspeaker does not operate normally. Inspect your products regularly for any visual or functionality irregularities.

Protect the cabling from being walked on or pinched.

View the S-Series Rigging Tutorial video and/or read the S-Series Rigging Manual before suspending the product.


Pay attention to rigging instructions included in both Blueprint and the S-Series Rigging Manual.

Use only with the rigging frames/accessories specified by Adamson, or sold with the loudspeaker system.

This speaker enclosure is capable of creating a strong magnetic field. Please use caution around the enclosure with data storage devices such as hard drives.

In an effort to continuously improve its products, Adamson releases updated accompanying software, presets and standards for its products. Adamson reserves the right to change the specifications of its products and the content of its documents with no prior notice.

S7p Ultra Compact Point Source

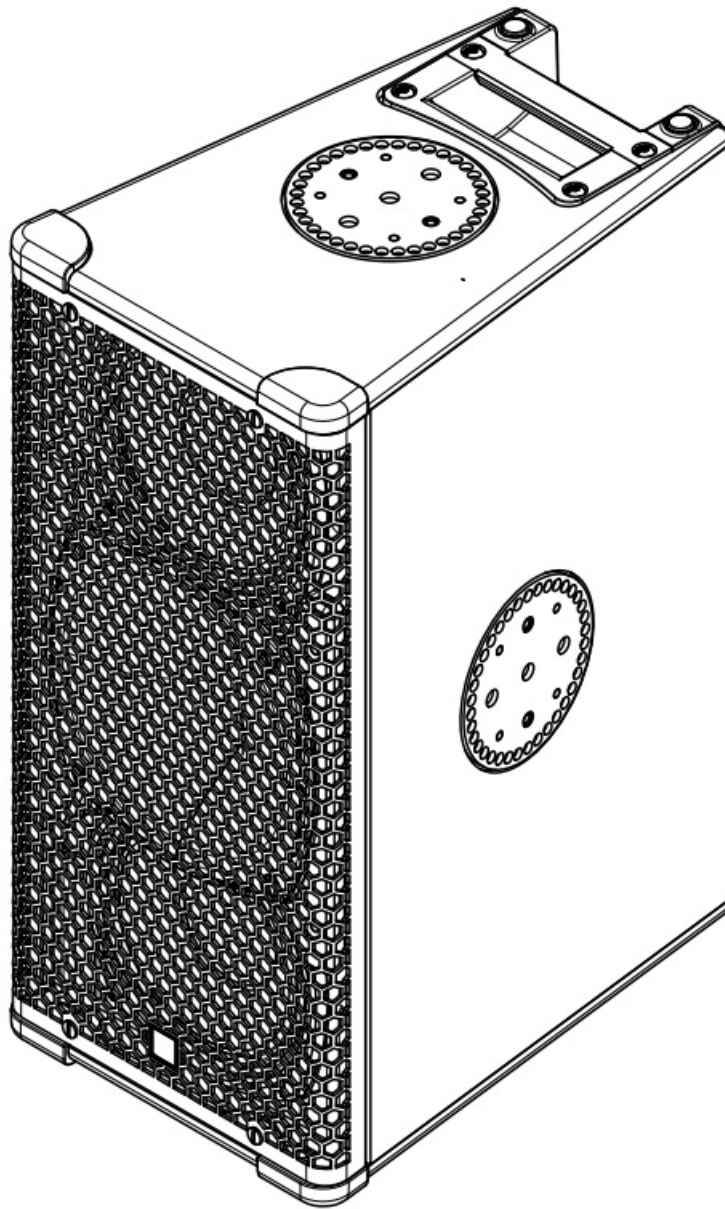


- The S7p is an ultra-compact, full range point source enclosure designed with high output level and high clarity in mind. It contains two symmetrically arrayed 7" transducers and a 3" compression driver mounted on an Adamson waveguide.
- The high frequency waveguide is rotatable in increments of 90° and is available with dispersion patterns of either 70° x 40° (HxV) or 100° x 50° (HxV).
- The S7p can be operated in passive or bi-amped mode, which is user-defined through a switch on the jack plate.
- Adamson's use of proprietary technologies such as Advanced Cone Architecture give the S7p an extremely high maximum SPL of 136.5 dB in bi-amped mode, 135 dB in passive mode.
- The nominal impedance of the S7p in bi-amped mode is 8 Ω per band, 6 Ω in passive mode.
- The operational frequency range of the S7p is 80 Hz to 18 kHz, +/- 3 dB.
- The S7p is intended to be used as either a standalone system, or a fill enclosure in tandem with other S-Series products. The S7p is designed to pair easily and coherently with Adamson subwoofers.
- The wooden enclosure is made of marine grade birch plywood, has an inset steel pole mount on the bottom, and steel rigging discs on top and each side of the cabinet. The rigging discs are compatible with several

different Adamson rigging accessories. Without sacrificing low resonance to composite material, the S7p is able to maintain a low weight of 17 kg / 37.3 lbs.

- The S7p is designed for use with Lab.gruppen's PLM+ Series amplifiers


Wiring

- The S7p (70×40 – 967-0011/100×50 – 967-0012) comes with 2x Neutrik Speakon™ NL4 connections, wired in parallel.
- In Bi-Amp Mode, pins 1+/- are connected to the 2x ND7-LM16 MF transducers, wired in parallel, pins 2+/- are connected to the NH3-8 HF transducer
- In Passive Mode, pins 1+/- are connected to the internal passive crossover, pins 2+/- are not connected.
- **S7p Jackplate**

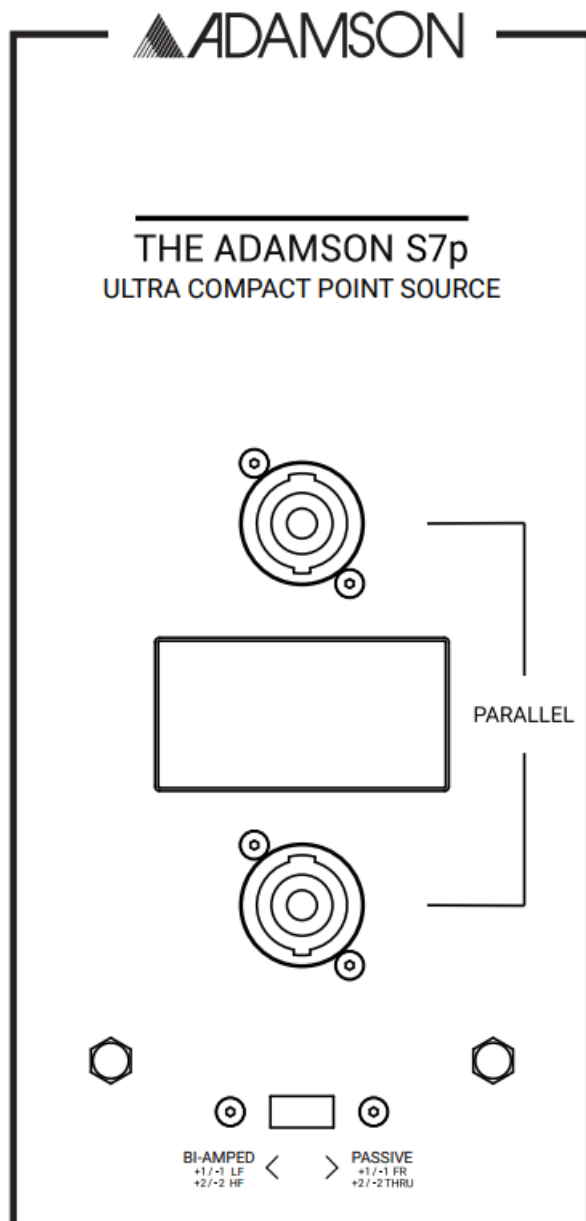


- **S7p Internal Wiring – Bi-Amped Mode**

**PARALLEL
INPUT**

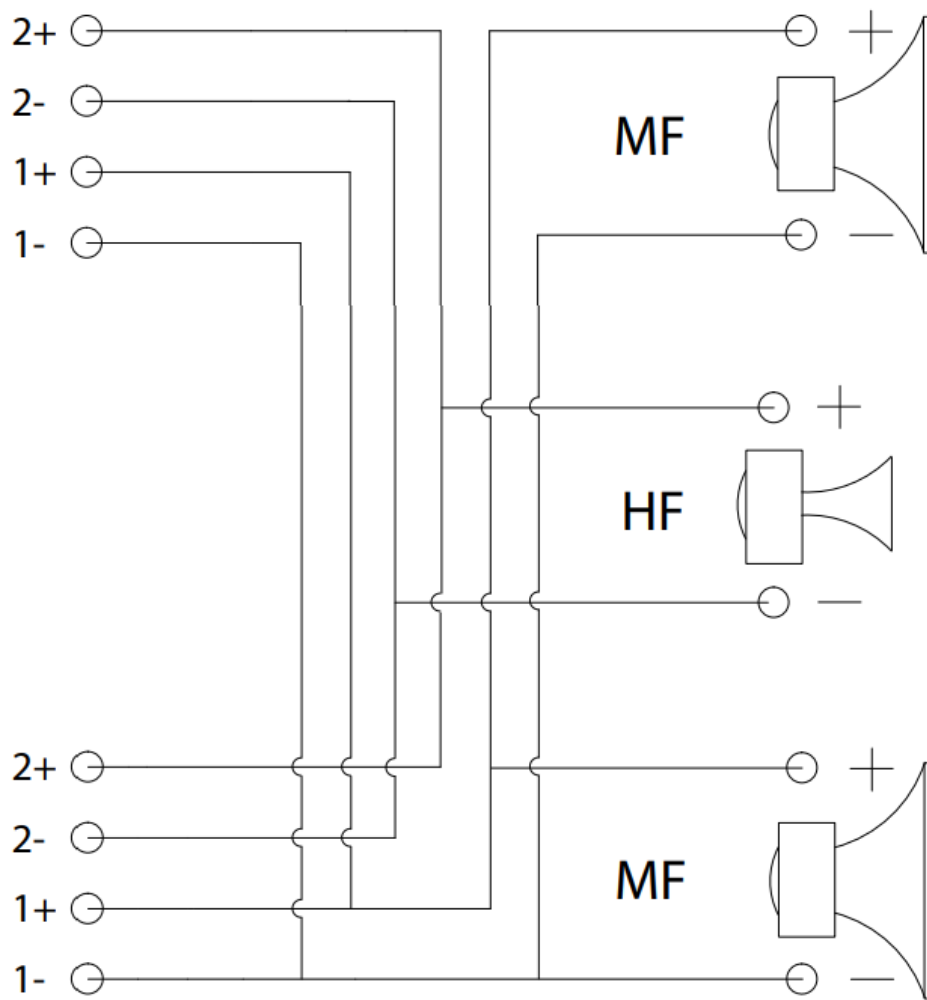

- S7p Internal Wiring – Passive Mode

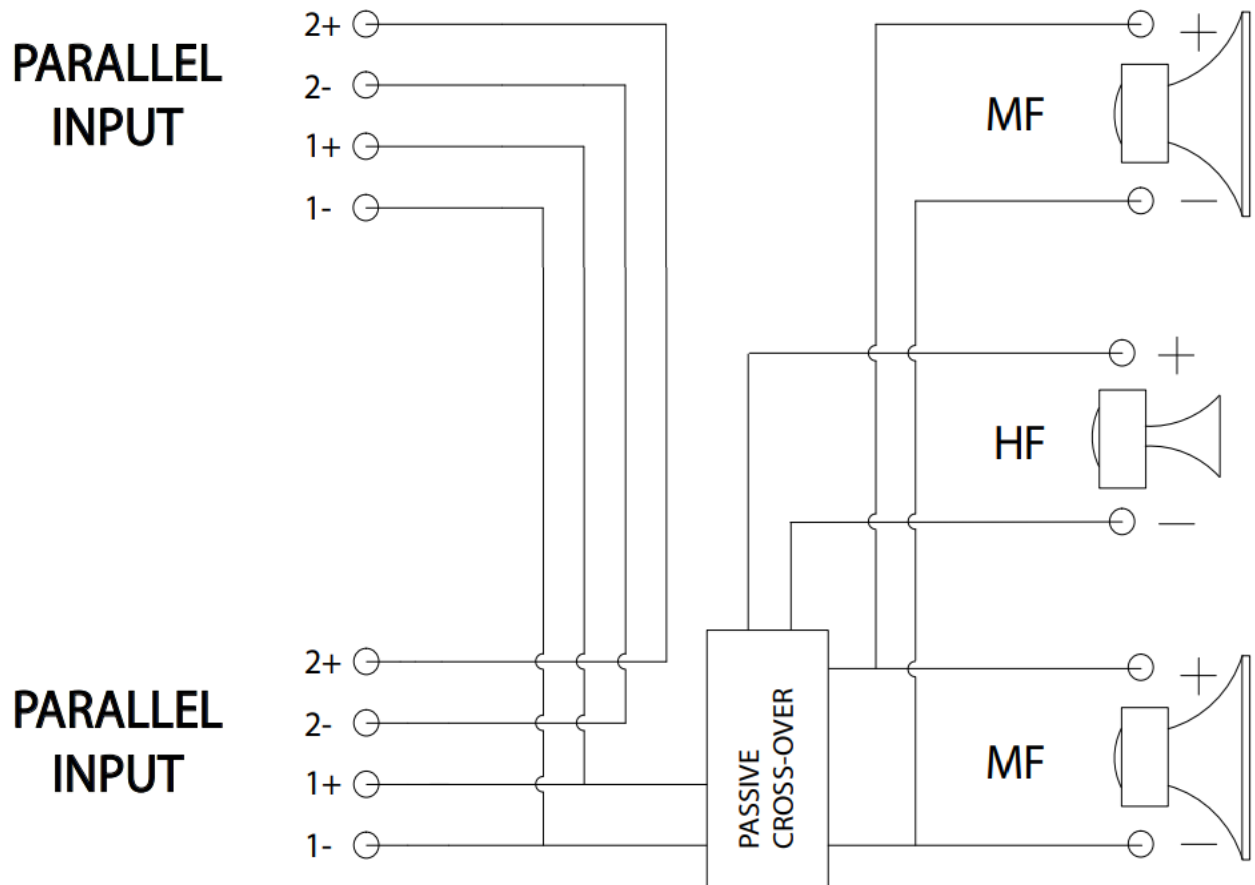


Amplification


The S7p is paired with Lab Gruppen PLM+ Series amplifiers.

Maximum quantities of the S7p in Bi-Amped Mode or Passive Mode per amplifier model are shown below. For a master list, please refer to the Adamson Amplification Chart, found [here](#), on the Adamson website.

- **Bi-Amped Mode**

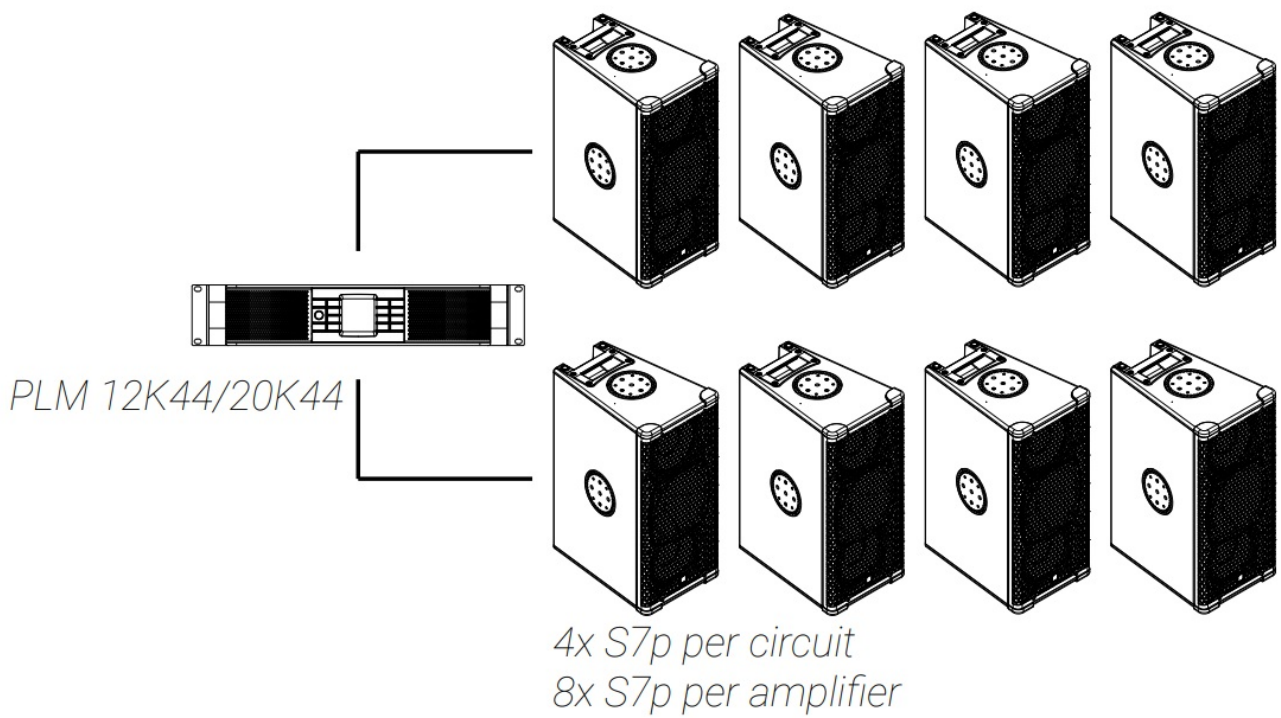

• Passive Mode

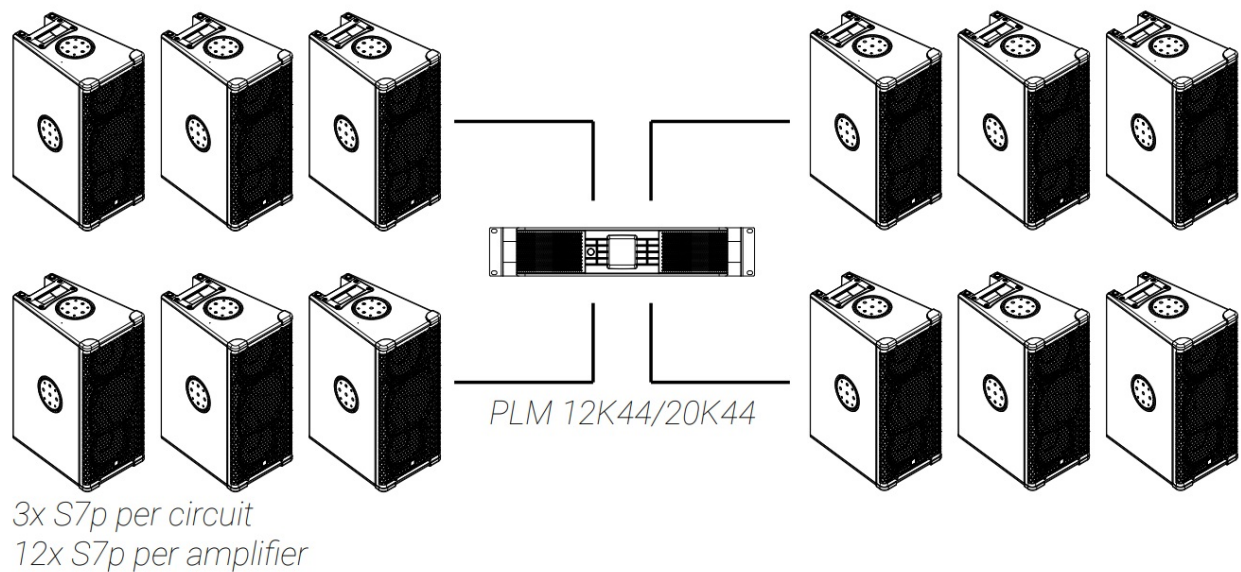

Presets

The [Adamson Load Library](#) contains presets designed for a variety of S7p applications, including both Bi-Amped and Passive modes. Furthermore, there are presets designed to pair with either Adamson subs, or Adamson line arrays.




For a master list, please refer to the [Adamson PLM & Lake Handbook](#).

Phase alignment with additional cabinets and subwoofers should be measured with suitable software.

Cabinet Configuration

Applicable Preset

Cabinet Configuration

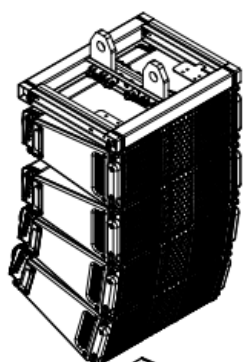

S7p FR

*Fullrange Mode
Linear Phase response matching
Adamson line arrays*

S7P Xo80




*Low cut at 80 Hz for use with
S-Series Subwoofers
Linear Phase response matching
Adamson line arrays*

CC S7p FR


*Fullrange Mode
Conventional Crossover
Add 5ms of delay for alignment
with speakers using Adamson linear
phase presets at the same distance*

CC S7P Xo80


*Low cut at 80 Hz
Conventional Crossover
Add 5ms of delay for alignment with
S-Series subwoofers at the same
distance*

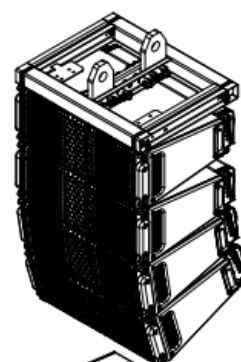


Dispersion

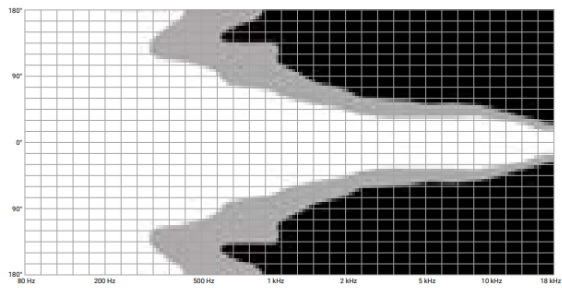


S7p Horizontal Pattern (70x40)

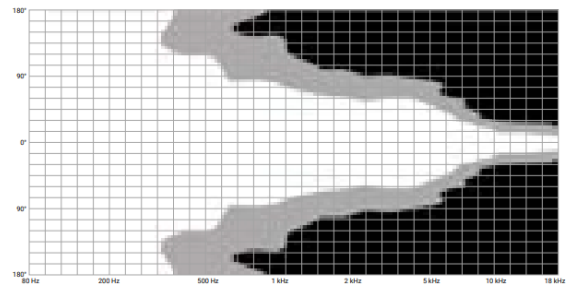

S7p Horizontal Pattern (100x50)

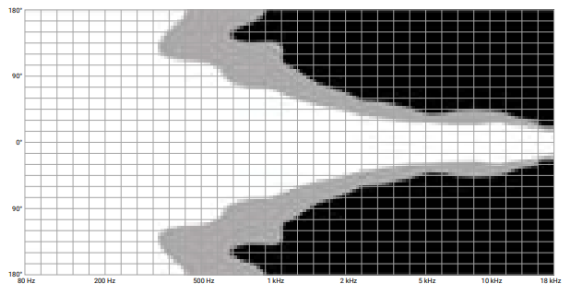

S7p Horizontal Pattern (40x70)

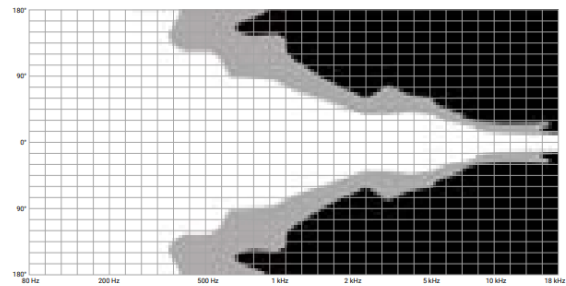


S7p Horizontal Pattern (50x100)

Technical Specifications

Frequency Range(+/- 3dB)	80 Hz- 78 kHz
NominalDirectivity(-6 dB) H x V	70° X 40° / 7 00° X 50°
Maximum Peak SPL**	7 36.5 dB (7 35 dB in passive)
Components LF	2x ND7-LM7 6 7" Kevlar® Neodymium Driver
Components HF	Adamson NH3-8 3" Diaphragm/ 7 4" Exit Compression Driver
Bi-Amped Nominal Impedance LF	2 X 16 0 (8 0)
Bi-Amped Nominal Impedance HF	8Ω
PassiveMode Nominal Impedance	6Ω
Bi-AmpedPower Handling (AES/ Peak) LF	500/ 2000 W
Bi-Amped Power Handling (AES / Peak) HF	710/440W
Passive Power Handling (AES/ Peak)	500/ 2000 W
Rigging	Integrated Rigging System Built-in Polemount Socket
Connection	2x Speakon™ NL4
Height (mm/ in)	527 / 20.75
Width Front (mm/ in)	249 / 9.8
Width Back (mm/ in)	7 6 7.6 / 6.6
Depth (mm/ in)	356 / 14
Weight (kg / lbs)	77 /37.5
Processing	Lake


**12 dB crest factor pink noise at 1m, free field, using specified processing and amplification

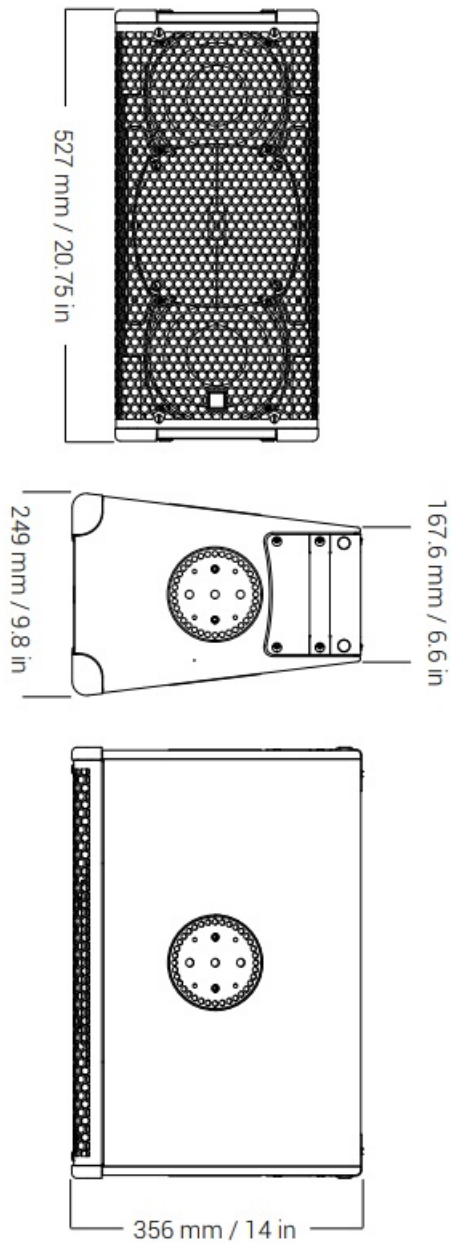


Accessories

There are a number of accessories available for the Adamson S7p point source cabinets. The list below is only a few of the many available accessories.


- Ultra-Compact Horizontal Bracket (934-0033)
S7p/CS7p Horizontal Yoke

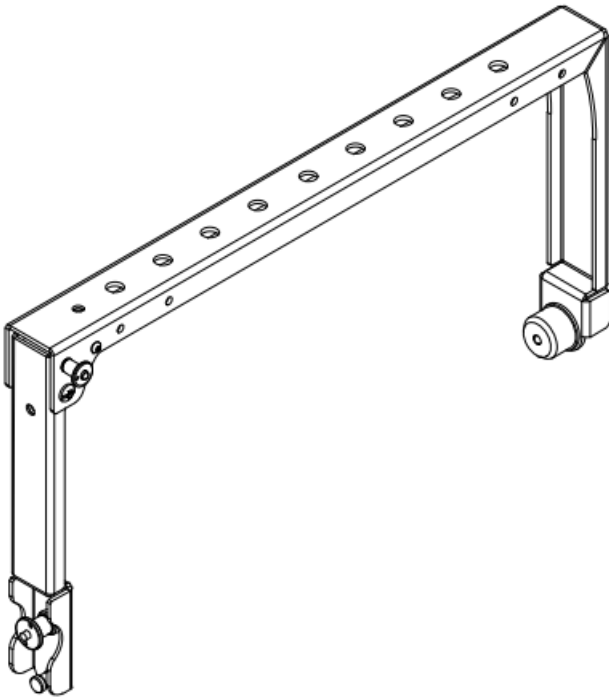

- Ultra-Compact Vertical Bracket (934-0036)
S7p/CS7p Vertical Yoke

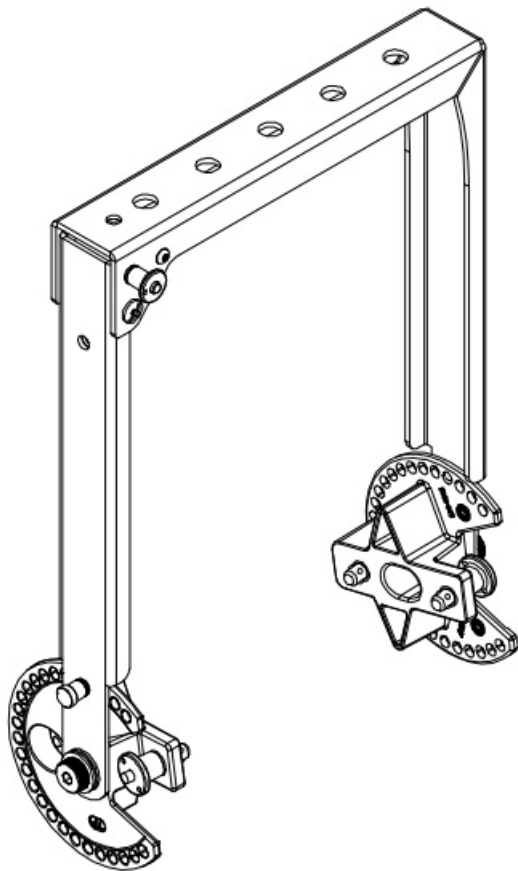


- Point Source H-Clamp (932-0045)
Horizontal articulator clamp

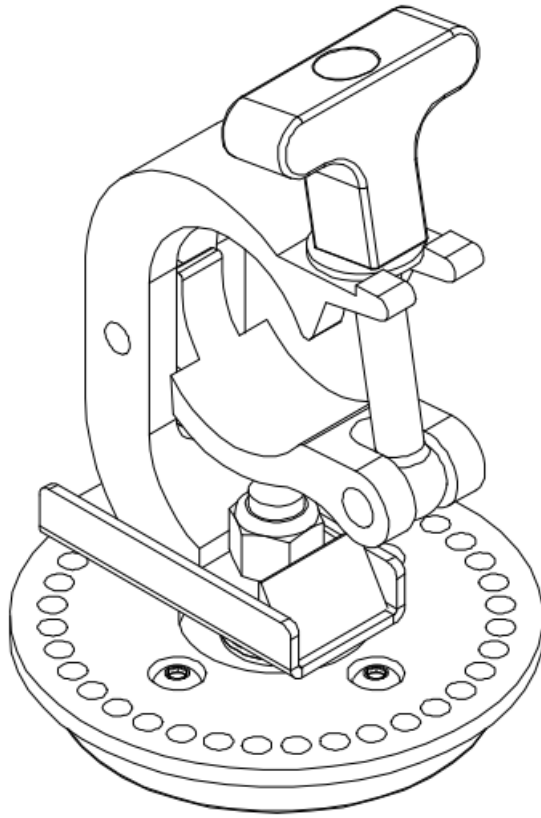


- Point Source Sight Mount (934-0035)

Circular disk with multiple angle bar

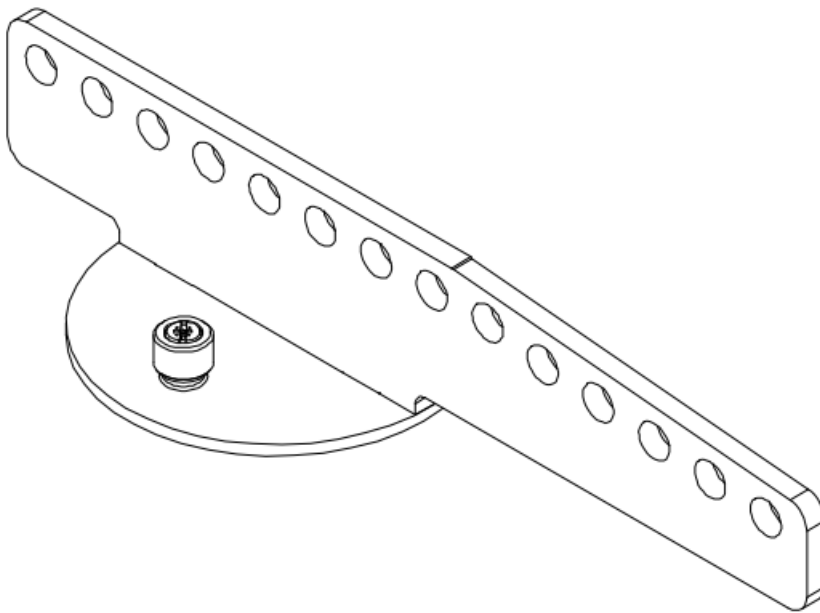


- Point Source Super Sight Mount (934-0039)

Used with the Sub and Ultra-Compact Horizontal Brackets to achieve greater articulation

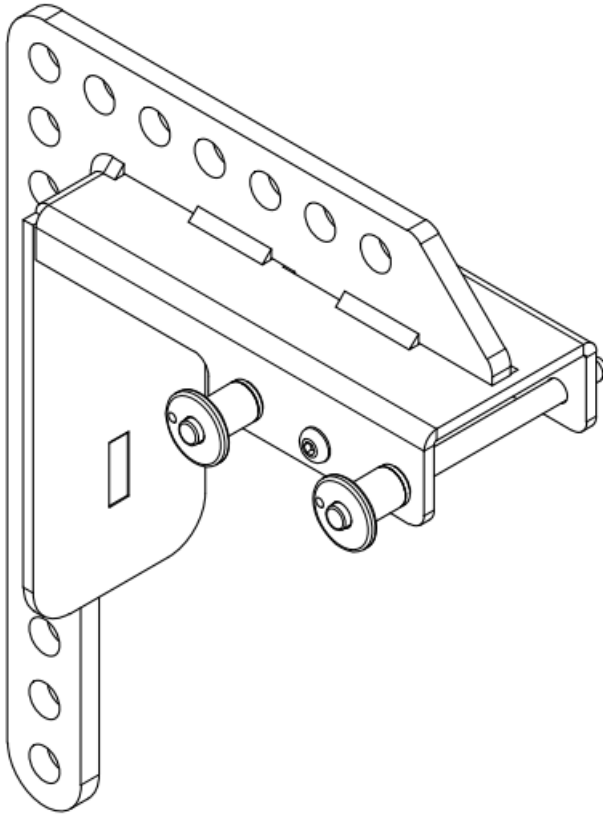

- Point Source Articulator (934-0038)

Used with Sub and Ultra-Compact Horizontal Brackets to achieve articulation between two point source cabinets.

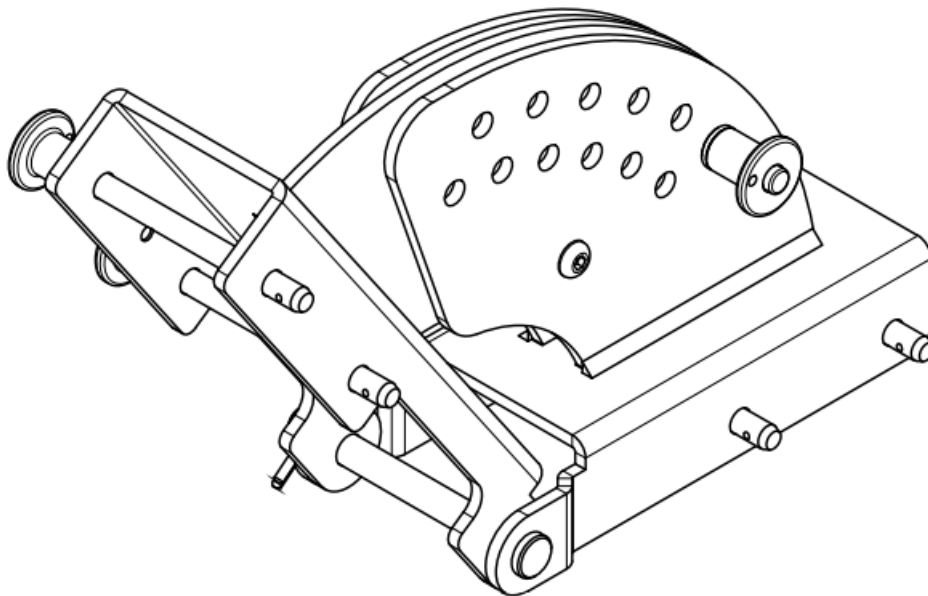

Declarations



Adamson Systems Engineering declares that the products stated below are in conformance with the relevant fundamental health and safety criteria of the applicable EC Directive(s), in particular:

Directive 2014/35/EU: Low Voltage Directive

967-0011 S7p (70×40)

967-0012 S7p (100×50)

Directive 2006/42/EC: Machinery Directive

934-0033 Ultra-Compact Point Source Horizontal Bracket

934-0036 Ultra-Compact Point Source Vertical Bracket

932-0045 Point H-Clamp

Signed at Port Perry, ON, CA – August 15, 2022



Brock Adamson (President & CEO)

Distribution Date: August 15, 2022

Copyright 2022 by Adamson Systems Engineering Inc.; all rights reserved

This manual must be accessible to the person operating this product. As such, the product owner must store it in a safe place and make it available upon request to any operator.

This manual can be downloaded from <https://adamsonsystems.com/support/downloads-directory/s-series/s7p>

Customer Support

ADAMSON SYSTEMS ENGINEERING, Inc.

1401 Scugog Line 6

Port Perry, Ontario, Canada L9L 0C3

T: +1 905 982 0520, F: +1 905 982 0609

Email: info@adamsonsystems.com

Website: www.adamsonsystems.com



Documents / Resources



[ADAMSON S7p Fullrange Point Source Speaker](#) [pdf] User Manual

S7p, Fullrange Point Source Speaker, Point Source Speaker, Fullrange Source Speaker, Source Speaker, Speaker

References

- [Adamson Systems Engineering - Pro Audio & Live Sound Reinforcement](#)
- [S7p](#)