



## AKKO 3098 Multi-Mode Keyboard User Manual

[Home](#) » [AKKO](#) » AKKO 3098 Multi-Mode Keyboard User Manual 

### AKKO 3098 Multi-Mode Keyboard



## Contents

- 1 30988 Technical Specifications
- 2 30988 HotKeys
- 3 30988 System Commands(Windows)
- 4 30988 System Commands(Mac)
- 5 30988 Backlight Settings
- 6 30988 Bluetooth Feature Overview
- 7 3098B Bluetooth Setup Instruction 1
  - 7.1 Switch to Bluetooth mode
  - 7.2 Set the Bluetooth profile
- 8 3098B Bluetooth Setup Instruction 2
  - 8.1 Bluetooth Pairing
  - 8.2 Switch the Bluetooth device
  - 8.3 Shut off the keyboard
  - 8.4 Reset the keyboard
- 9 Key/Lighting Effects Customization Instruction
- 10 Akko Warranty and Service Statement
- 11 Documents / Resources
- 12 Related Posts

## 30988 Technical Specifications


<b>Dimensions</b>	<b>Weight</b>	<b>Country of Origin</b>	<b>Type</b>
Approximately 382*134*40mm	Approximately 1.1kg	China	Mechanical Keyboard
<b>Keycap</b>	<b>Connection</b>	<b>Interface</b>	<b>Battery Capacity</b>
PBT Material	Bluetooth/USB/2.4Ghz	Type-C To USB	3000mAh
<b>Multimedia Keys</b>	<b>N-Key Rollover</b>	<b>Key/Lighting Effects Customization</b>	
YES	YES	The keyboard can only be customized with driver in wired mode	

## 30988 HotKeys




Fn+	F1	File Explorer	Fn+	F6	Pause/Playback	Fn+	M	Mute
	F2	E-mail		F7	Previous Song		<	Decrease Volume
	F3	Windows Search		F8	Next Song		>	Increase Volume
	F4	Browser Homepage		P	Print Screen		W	Swap W A S D with ↑ ↓ ← →
	F5	Media		C	Calculator			

## 30988 System Commands(Windows)

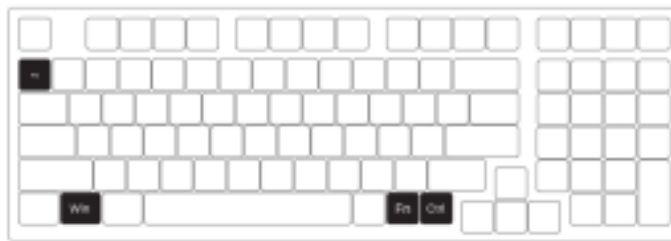

<b>Lock Windows Key</b>	<b>Restore Factory Settings</b>	<b>Revert Ctrl into Menu (APP) key</b>
Press Fn and left Win key	Hold down Fn and press ~ key	Hold down FN and press right Ctrl

## 30988 System Commands(Mac)

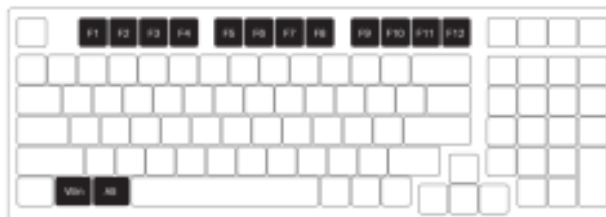

F1	Decrease display brightness	F5	N/A	F9	Skip forward (audio)	Left Win	Command
F2	Increases display brightness	F6	N/A	F10	Mute	Left Alt	Option
F3	Open mission control	F7	Skip back (Audio)	F11	Volume down	Fn + (F1 ~ F12)	
F4	Activate Siri	F8	Pause/Play (Audio)	F12	Volume up	F1 ~ F12	

## 30988 Backlight Settings

Num Lock    Battery Level Indicator

Cap Lock LED Indicator (White)

Lock Win

Fn + Del	Effect 1, Effect 2, Effect 3, Effect 4, Effect 5	Fn + ↑	Bright	The adjustments on the left is for general lighting effects. Some lighting effects cannot be reset. For example, effects with constant light can only adjust brightness or they can't reset animation speed and direction.
Fn + Ins	Effect 6, Effect 7, Effect 8, Effect 9, Effect 10	Fn + ↓	Dim	
Fn + PgUp	Effect 11, Effect 12, Effect 13, Effect 14, Effect 15	Fn + ←	Get animation direction to left	
Fn + PgDn	Effect 16, Effect 17, Effect 18, Effect 19, Effect 20	Fn + →	Get animation direction to right	
Fn + L	Light On/Off	Fn + F12	Slower Animation	
Fn + I	In all lighting effects with RGB color mode, this shortcut allows you to set the backlight color to 7 single color with RGB loop effect.	Fn + F11	Faster Animation	

## 30988 Bluetooth Feature Overview



Fn + E	Bluetooth device 1	Short press to connect with slow flashing blue LED. Press and hold to pair device with fast flashing blue LED.	Back Switch Indicator
Fn + R	Bluetooth device 2		
Fn + T	Bluetooth device 3	Short press to connect with slow flashing green LED. The lighting effect will be restored when pairing succeeds.	Left: Windows Middle: Switch to USB mode and stop charging. (Windows) Right: Mac
Fn + Y	2.4G wireless device		
Fn + U	Wired mode		

## 3098B Bluetooth Setup Instruction 1

### Switch to Bluetooth mode

1. When the keyboard remains unplugged, users can push the switch on the back to the left/right to enter Windows/Mac mode correspondingly. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.
2. When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

### Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is Akko 3098BT-1 / Akko 3098BT-2 / Akko 3098BT-3 while the device name under Bluetooth 3.0 is AKK0 3098 BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

## 3098B Bluetooth Setup Instruction 2

### Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko 3098 BT3.0 (Bluetooth 3.0) and Akko 3098-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences {Note: some devices can only search for the Bluetooth 5.0 group}.

### Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E/ Fn+R/ Fn+ T / Fn+Yfor at least 3 seconds to quickly switch between them.

### Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving;  
If the keyboard remains unused for over 1 0 mins, it would go to sleep mode and you can activate it by pressing any key.

**Note:** The battery saver mode for Windows system would affect/delay the sleep activation lime of the keyboard.

### Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 3098 keyboard from the list of connected device.

## Key/Lighting Effects Customization Instruction

1. The key/lighting effects customization must be completed in wired mode with Akko driver.
2. In wired mode, the lighting effects can also achieve music rhythm effects with Akko driver.

- 3. Please download the Akko Cloud driver on our website.
- 4. Users can download the driver via [en.akkogear.com](http://en.akkogear.com)

**Akko Warranty and Service Statement**

- 1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
- 2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
- 3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
- 4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

<b>Precautions</b>	Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.
--------------------	---



[www.akkogear.com](http://www.akkogear.com)



**Documents / Resources**

	<a href="#">AKKO 3098 Multi-Mode Keyboard</a> [pdf] User Manual 3098, Multi-Mode Keyboard, 3098 Multi-Mode Keyboard
--	--