



AKKO 3098B Multi Mode Keyboard User Manual

[Home](#) » [AKKO](#) » AKKO 3098B Multi Mode Keyboard User Manual

Contents [[hide](#)]

- [1 AKKO 3098B Multi Mode Keyboard](#)
- [2 Technical Specifications](#)
- [3 HotKeys](#)
- [4 System Commands](#)
- [5 Backlight Settings](#)
- [6 Bluetooth Feature Overview](#)
- [7 Bluetooth Setup Instruction 1](#)
- [8 Key/Lighting Effects Customization Instruction](#)
- [9 Akko Warranty and Service Statement](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)



AKKO 3098B Multi Mode Keyboard



Technical Specifications

Dimensions	Weight	Country of Origin	Type
Approximately 382*134*40mm	Approximately 1.1kg	China	Mechanical Keyboard
Keycap	Connection	Interface	Battery Capacity
PBT Material	Bluetooth/USB/2.4Ghz	Type-C To USB	3000mAh
Multimedia Keys	N-Key Rollover	Key/Lighting Effects Customization	
YES	YES	The keyboard can only be customized with driver in wired mode	

HotKeys




Fn+	F1		File Explorer
	F2		E-mail
	F3	=	Windows Search
	F4		Browser Homepage
	F5		Media

Fn+	F6		Pause /Playback
	F7		Previous Song
	F8	=	Next Song
	P		Print Screen
	C		Calculator

Fn+	M		Mute
	<		Decrease Volume
	>	=	Increase Volume
	w		Swap W A S D with ↑↓ ← →

System Commands

(Windows)

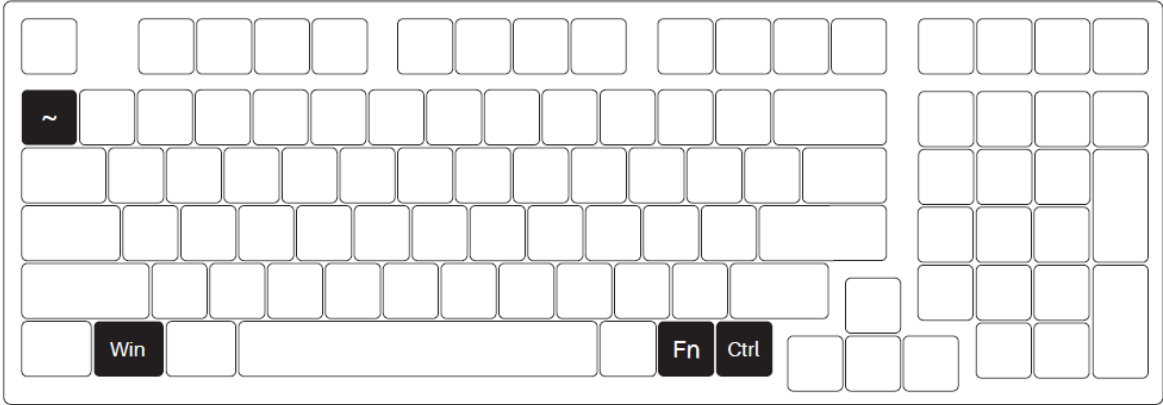

Lock Windows Key

Press Fn and left Win key


Restore Factory Settings

Hold down Fn and press ~ key

Revert Ctrl into Menu (APP) key


Hold down FN and press right Ctrl

(Mac)

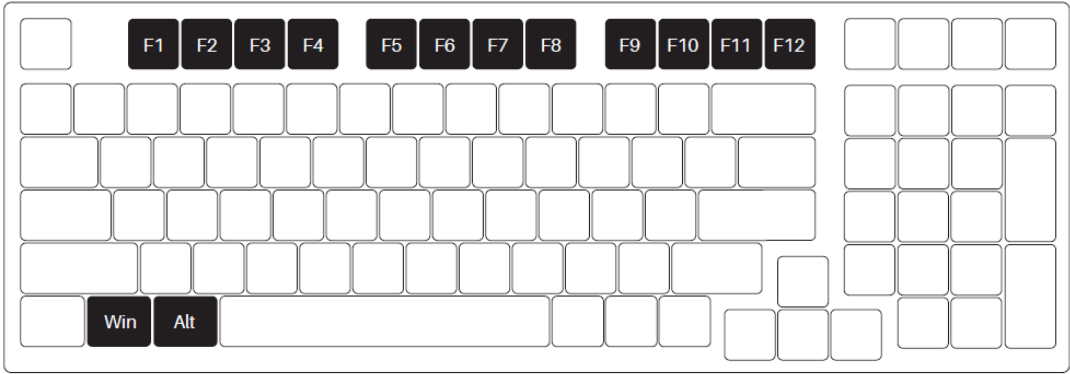

F1	Decrease display brightness	F5	N/A	F9	Skip forward (audio)	Left Win	Command
F2	Increases display brightness	F6	N/A	F10	Mute	LeftAlt	Option
F3	Open mission control	F7	Skip back (Audio)	F11	Volume down	Fn + (F1 ~ F12) F1 ~ F12	
F4	Activate Siri	F8	Pause/Play (Audio)	F12	Volume up		


Backlight Settings

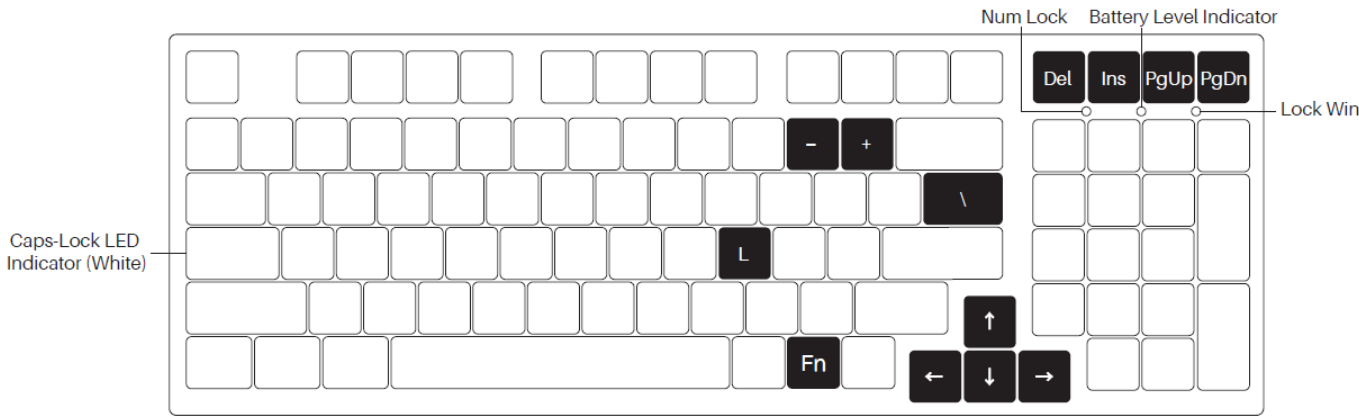

Fn+	Del		Effect 1 Effect 2 Effect 3 Effect 4 Effect 5
	Ins		Effect 6 Effect 7 Effect 8 Effect 9 Effect 10
	PgUp	=	Effect 11 Effect 12 Effect 13 Effect 14 Effect 15
	PgDn		Effect 16 Effect 17 Effect 18 Effect 19 Effect 20
	L		Light On / Off
	\		In all lighting effects with RGB color mode, this shortcut allows you to set the backlight color to 7 single color with RGB loop effect.

Fn+	“↑”		Bright	The adjustments on the left is for generic lighting effects. Some lighting effects cannot be tweaked. For example, effects with constant light can only adjust brightness as they don't have animation speed and direction.
	“↓”		Dim	
	“←”	=	Set animation direction to left	
	“→”		Set animation direction to right	
	“_”		Slower Animation	
	“+”		Faster Animation	


Bluetooth Feature Overview

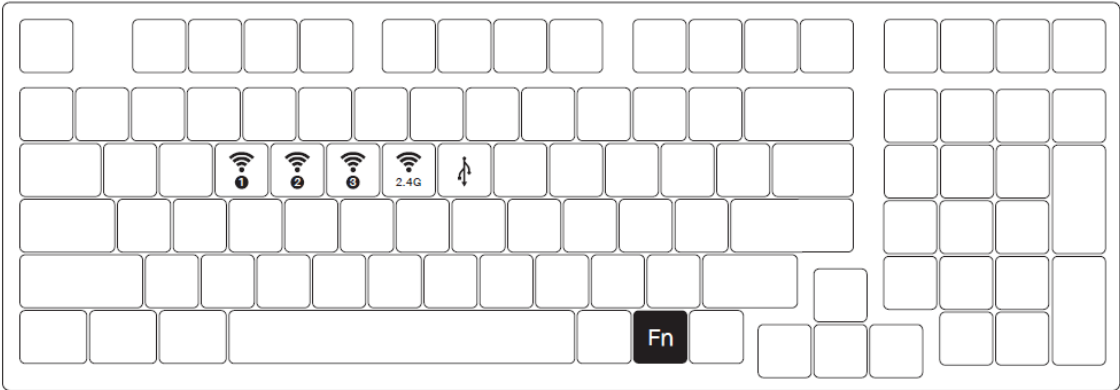

Fn+	E	=	Bluetooth device 1
	R		Bluetooth device 2
	T		Bluetooth device 3
	Y		2.4G wireless device
	U		Wired mode

Short press to connect with slow flashing blue LED;
Press and hold to pair device with fast flashing blue LED.

Short press to connect with slow flashing green LED;
The lighting effect will be restored when pairing succeeds.

 Back Switch Indicator

Left : Windows

Middle: Switch to USB mode and stop charging. (Windows)

Right: Mac

Bluetooth Setup Instruction 1

1. Switch to Bluetooth mode

- When the keyboard remains unplugged, users can push the switch on the back to the left/right to enter Windows/Mac mode correspondingly. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.
- When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

2. Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is Akko 3098BT-1 / Akko 3098BT-2 / Akko 3098BT-3 while the device name under Bluetooth 3.0 is AKK0 3098 BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

3. Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko 3098 BT3.0 (Bluetooth 3.0) and Akko 3098-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences (Note: some devices can only search for the Bluetooth 5.0 group).

4. Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E / Fn+R / Fn+T / Fn+Y for at least 3 seconds to quickly switch between them.

5. Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving; If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

6. Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 3098 keyboard from the list of connected device.

Key/Lighting Effects Customization Instruction



1. The key/lighting effects customization must be completed in wired mode with Akko driver.
2. In wired mode, the lighting effects can also achieve music rhythm effects with Akko driver.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

Akko Warranty and Service Statement

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without the manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

www.akkogear.com

Documents / Resources

	<p>AKKO 3098B Multi Mode Keyboard [pdf] User Manual 3098B, 2A4K8-3098B, 2A4K83098B, 3098B Multi Mode Keyboard, Multi Mode Keyboard, Mode Keyboard, Keyboard</p>
	<p>AKKO 3098B Multi Mode Keyboard [pdf] User Manual 3098B, 3098B Multi Mode Keyboard, Multi Mode Keyboard, Keyboard</p>

References

- [Akko 3098B Multi Mode Keyboard | 2A4K8-3098B, 2A4K83098B, 3098B Multi Mode Keyboard, Multi Mode Keyboard, Mode Keyboard, Keyboard](#)
- [Akko | Designer for Mechanical Keyboards](#)
- [Akko \(@akkogear\) • Instagram photos and videos](#)
- [Akko 3098B Multi Mode Keyboard | 2A4K8-3098B, 2A4K83098B, 3098B Multi Mode Keyboard, Multi Mode Keyboard, Mode Keyboard, Keyboard](#)