



Akko 3098B Multi Modes Mechanical Keyboard User Manual

[Home](#) » [AKKO](#) » Akko 3098B Multi Modes Mechanical Keyboard User Manual 

Akko 3098B Multi Modes Mechanical Keyboard



Contents


- [1 30988 Technical Specifications](#)
- [2 30988 HotKeys](#)
- [3 30988 System Commands\(Windows\)](#)
- [4 30988 System Commands\(Mac\)](#)
- [5 30988 Backlight Settings](#)
- [6 30988 Bluetooth Feature Overview](#)
- [7 3098B Bluetooth Setup Instruction 1](#)
- [8 Key/Lighting Effects Customization Instruction](#)
- [9 Akko Warranty and Service Statement](#)
- [10 CUSTOMER SUPPORT](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)

30988 Technical Specifications

Dimensions	Weight	Country of Origin	Type
Approximately 382*134*40 mm	Approximately 1.1 kg	China	Mechanical Keyboard
Keycap	Connection	Interface	Battery Capacity
PBT Material	Bluetooth/USB/2.4Ghz	Type-C To USB	3000mAh
Multimedia Keys	N-Key Rollover	Key/Lighting Effects Customization	
YES	YES	The keyboard can only be customized with driver in wired mode	


30988 HotKeys

Fn+	F1	=	File Explorer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Media
Fn+	F6	=	Pause /Playback
	F7		Previous Song
	F8		Next Song
	P		Print Screen
	C		Calculator
Fn+	M	=	Mute
	<		Decrease Volume
	>		Increase Volume
	W		Swap W AS D with ↑↓,←→

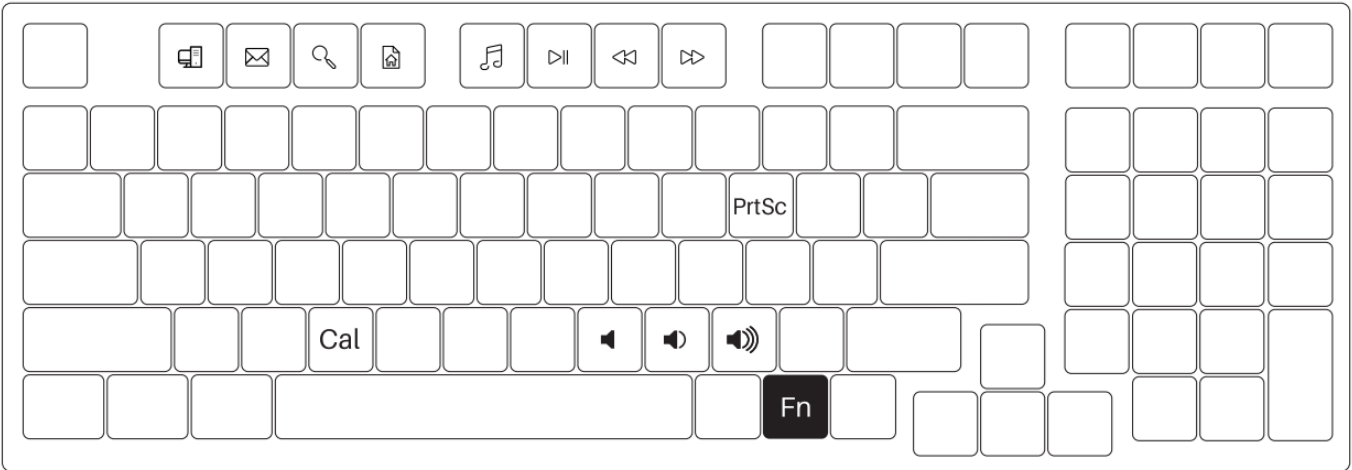

30988 System Commands(Windows)


Lock Windows Key	Restore Factory Settings	Revert Ctrl into Menu (APP) key
Press Fn and left Win key	Hold down Fn and press"" key	Hold down FN and press right Ctrl

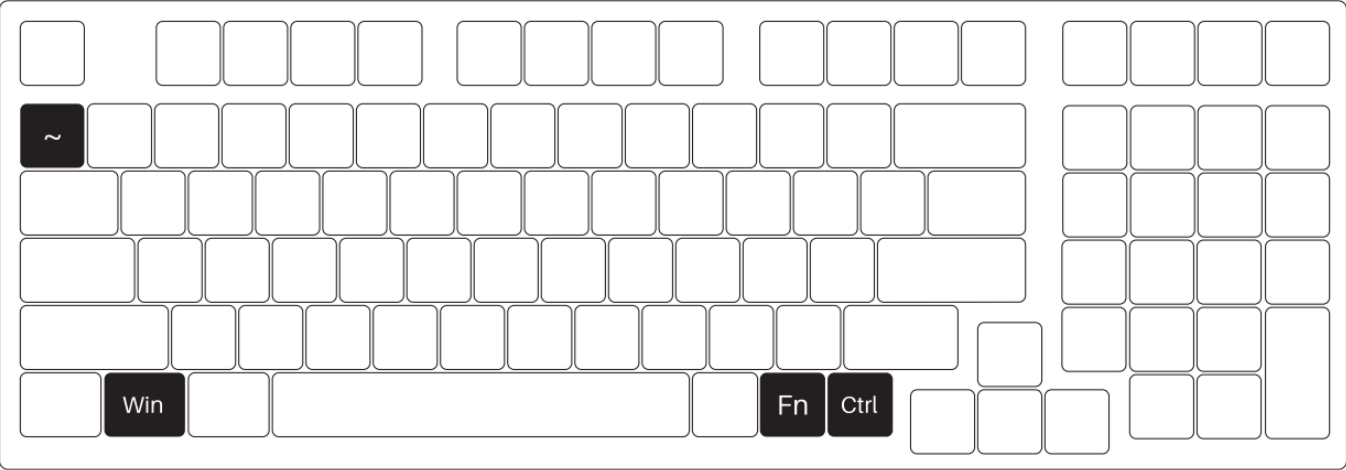

30988 System Commands(Mac)


F1	Decrease display brightness
F2	Increases display brightness
F3	Open mission control
F4	Open mission control
F5	N/A
F6	N/A
F7	Skip back (Audio)
F8	Pause/ Play (Audio)
F9	Skip forward (audio)
F10	Mute
F11	Volume down
F11	Volume up
Left Win	Command
Left Alt	Option

Fn+(F1~F12
F1 ~F12

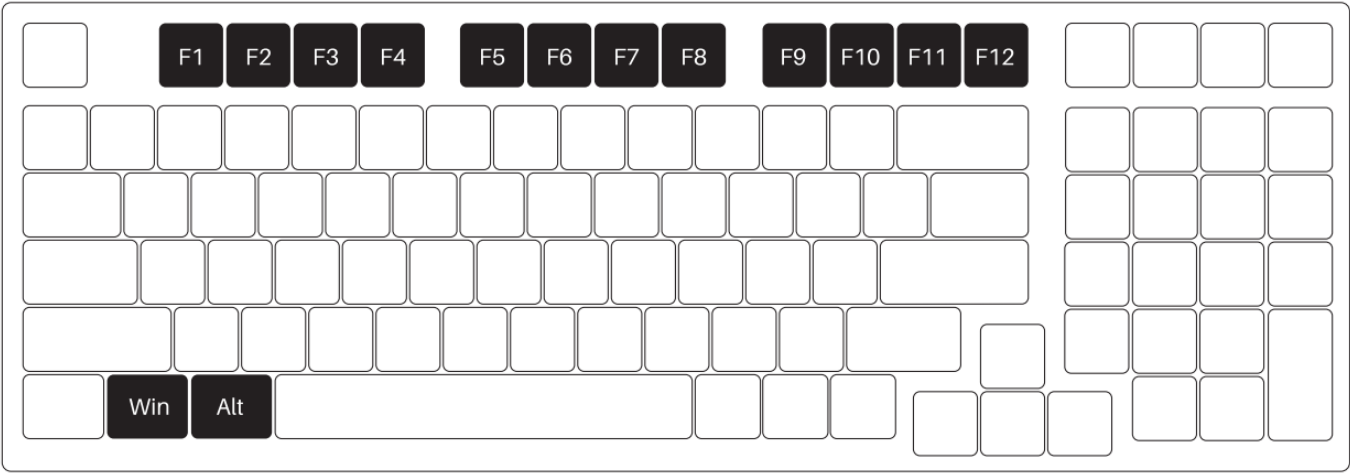


30988 Backlight Settings

Fn+	Del	=	Effect1,Effect2,Effect3,Effect4,Effect5	
	Ins		Effect 6, Effect 7, Effect 8, Effect 9, Effect 10	
	Pg Up		Effect 11, Effect 12, Effect 13, Effect 14, Effect 15	
	Pg Dn		Effect 16, Effect 17, Effect 18, Effect 19, Effect 20	
	L		Light On/ Off	
	\		In all lighting effects with RGB color mode, this shortcut allows you to set the backlight color to 7 single color with RGB loop effect.	
Fn+	“↑”	=	Bright	The adjustments on the left is for generic Lighting effects. Some lighting effects cannot be tweaked. For example, effects with constant light can only adjust brightness as they don't have animation speed and direction.
	“↓”		Dim	
	“←”		Set animation direction to left	
	“→”		Set animation direction to right	
	“_”		Slower Animation	
	“+”		Faster Animation	

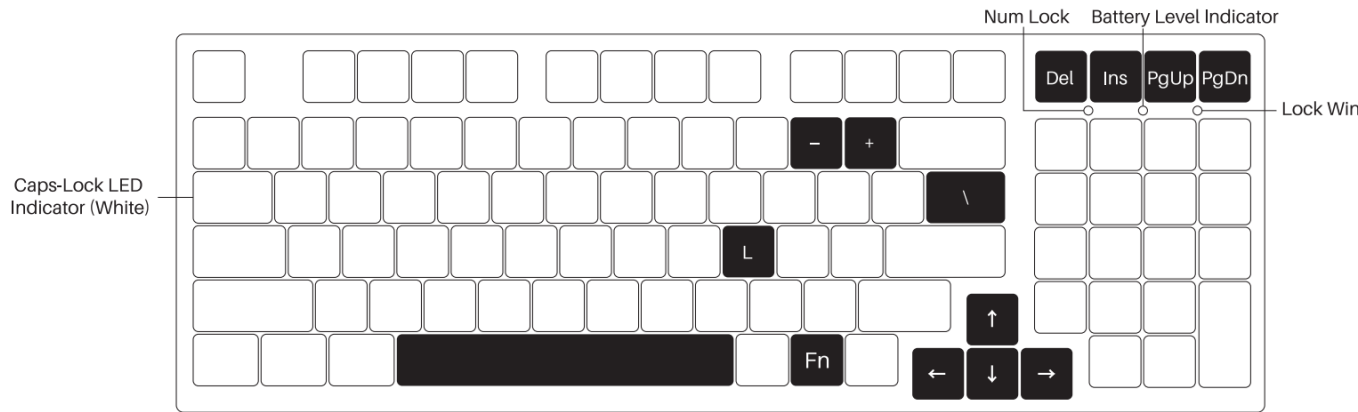

30988 Bluetooth Feature Overview

Fn+	E	=	Bluetooth device 1	Short press to connect with slow flashing blue LED Press and hold to pair device with fast flashing blue LED.
	R		Bluetooth device 2	
	T		Bluetooth device 3	
	Y		2.4G wireless device	Short press to connect with slow flashing green LED;
	U		Wired mode	The lighting effect will be restored when pairing succeeds.

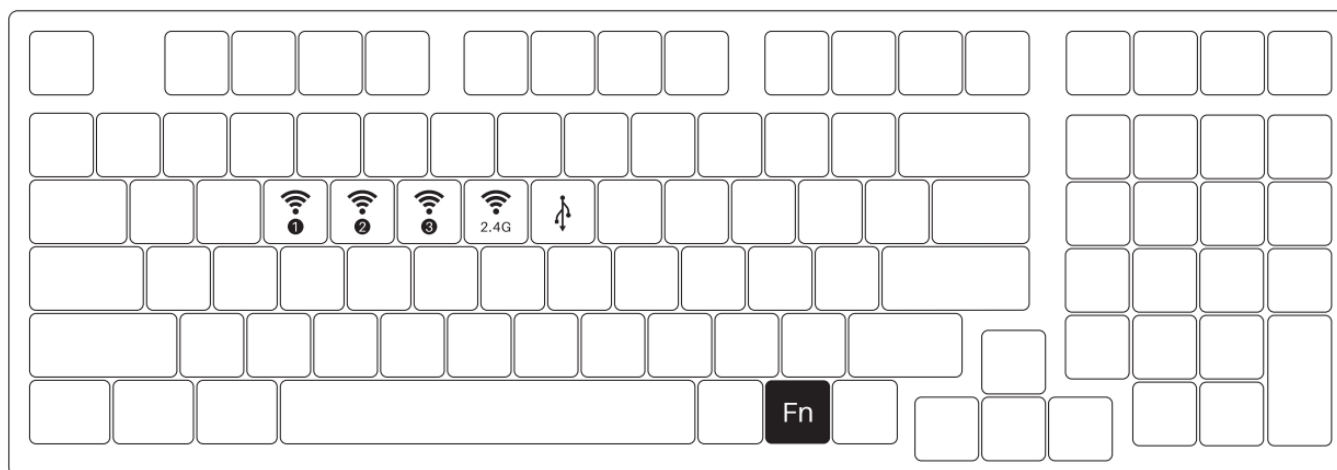

Back Switch Indicator

Left : Windows

Middle: Switch to USB mode and stop charging. (Windows)

Right: Mac

3098B Bluetooth Setup Instruction 1

Switch to Bluetooth mode

1. When the keyboard remains unplugged, users can push the switch on the back to the left/right to enter Windows/Mac mode correspondingly. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.
2. When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is Akko 3098BT-1 / Akko 3098BT-2 / Akko 3098BT-3 while the device name under Bluetooth 3.0 is AKK0 3098 BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

3098B Bluetooth Setup Instruction 2

Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko 3098 BT3.0 (Bluetooth 3.0) and Akko 3098-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences {Note: some devices can only search for the Bluetooth 5.0 group}.

Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E/ Fn+R/ Fn+ T / Fn+Yfor at least 3 seconds to quickly switch between them.

Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving;

If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 3098 keyboard from the list of connected device.

Key/Lighting Effects Customization Instruction

1. The key/lighting effects customization must be completed in wired mode with Akko driver.
2. In wired mode, the lighting effects can also achieve music rhythm effects with Akko driver.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

Akko Warranty and Service Statement

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

CUSTOMER SUPPORT



www.akkogear.com



[instagram.com/akkogear](https://www.instagram.com/akkogear)



[facebook.com/akkogear](https://www.facebook.com/akkogear)



Documents / Resources



[Akko 3098B Multi Modes Mechanical Keyboard](#) [pdf] User Manual

3098B, 3098B Multi Modes Mechanical Keyboard, Multi Modes Mechanical Keyboard, Modes M
echanical Keyboard, Mechanical Keyboard, Keyboard

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.