



Akko 5098B Mechanical Keyboard Instruction Manual

[Home](#) » [AKKO](#) » Akko 5098B Mechanical Keyboard Instruction Manual 

Akko 5098B Mechanical Keyboard Instruction Manual




Contents


- 1 Thank you for supporting Akko
- 2 Packing List
- 3 What's in the package
- 4 LED Indicator Overview
- 5 System Commands (Windows)
- 6 LCD Screen Features
- 7 Power Switch
- 8 System Commands (Mac)
- 9 Back light Settings
- 10 Wireless/Wired Connection Guide
- 11 Bluetooth Pairing
- 12 2.4G Pairing
- 13 Battery Level Check
- 14 Key/Lighting Effects Customisation instruction
- 15 Akko Warranty and Service Statement
- 16 Documents / Resources
 - 16.1 References
- 17 Related Posts

Thank you for supporting Akko

Packing List

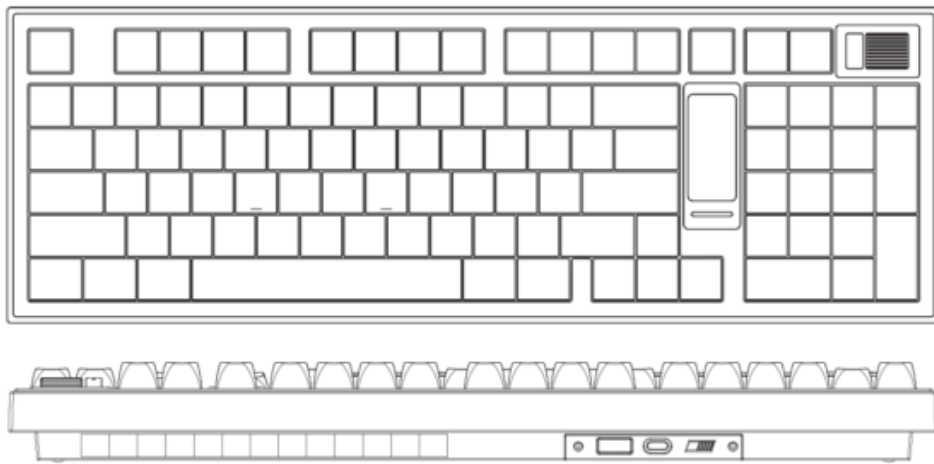

What's in the package

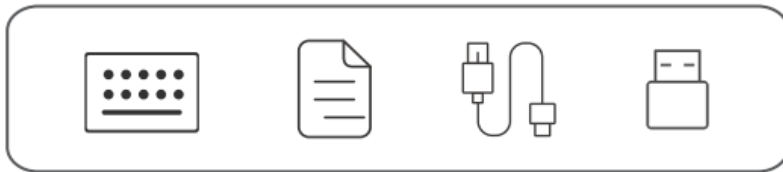

Minimum System Requirement

Windows®XP/Vista / 7/ 8 / 10 or higher version


Connectivity Method

Connect the keyboard to your computer by plugging in the USB cable into an available USB-A port to start using it.

LED Indicator Overview


Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for key E	Blue light blinks slowly	Blue light blinks fast	On for 2s and then off
Bluetooth device 1	LED for key R	Blue light blinks slowly	Blue light blinks fast	On for 2s and then off
Bluetooth device 1	LED for key T	Blue light blinks slowly	Blue light blinks fast	On for 2s and then off
2.4G wireless device	LED for key Y	Green light blinks slowly	Green light blinks fast	On for 2s and then off
Wired mode	LED for key U	N/A	N/A	Red light On for 2s and then off
Status	Indicator	Indicating Mode		
Low Battery	The third indicator light	Red Light Blinks Slowly		
Charging	The third indicator light	Steady Red		
Fully Charged	The third indicator light	LED OFF		
Caps	The first indicator light	Steady White		
Num	The second indicator light	Blue light is always on		
Lock Win	Win key indicator	Steady White		

Hot Keys

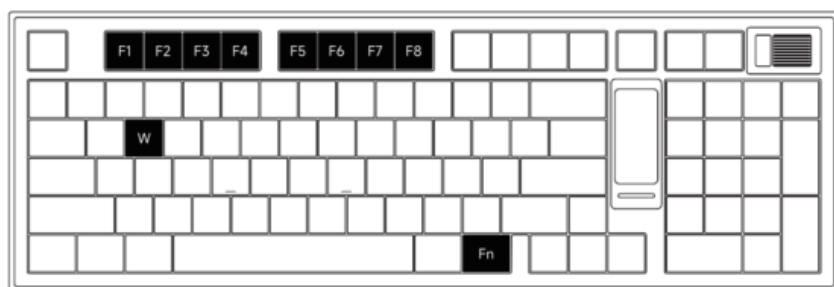

Fn+	W	=	Swap WASD with↑↓←→
	F1		My Computer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Multimedia Player
	F6		Play/Pause
	F7		Previous Song
	F8		Next Song

System Commands (Windows)

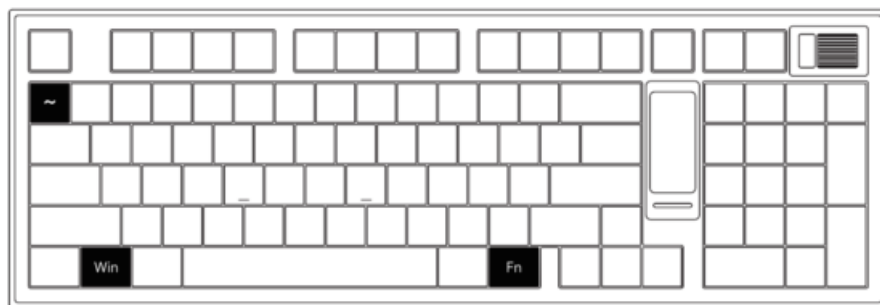

Fn+	~	=	Press and hold for 3 seconds to restore to factory settings
	L_Win		Lock Windows Key


LCD Screen Features

Encoder Wheel


- **Scroll Up:** Volume +
- **Scroll Down:** Volume –
- **Press:** Play/Pause
- **Fn + Press:** Switch to screen control mode
 - **Scroll Up/Down:** Switch between screen functions
 - **Press:** Confirm selection and return to the previous level

Volume Control	Volume up, Volume down
Lighting Effects	Effect 1, Effect 2, Effect 3, Effect4, Effect5, Effect 6, Effect 7, Effect 8, Effect 9 , Effect 10, Effect 11, Effect 12, Effect 13, Effect 14, Effect 15, Effect 16, Effect 17, Effect 18, Effect 19, Effect 20
Light Color	Rainbow, Red, Green, Blue, Orange, Purple, Yellow, Custom (White)
Light brightness	025%-50%-75%-100
Light Speed	025%-50%-75% 100%
Side light effect	Neon, Wave, Marquee, Steady, Breathing, Off
Language Selection	
Connection	Bluetooth device 1, Bluetooth device 2, Bluetooth device 3, 2.4G wireless device, Wired mode, Return

Power Switch

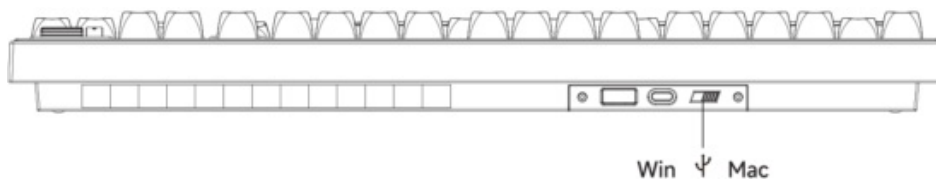


System Commands (Mac)

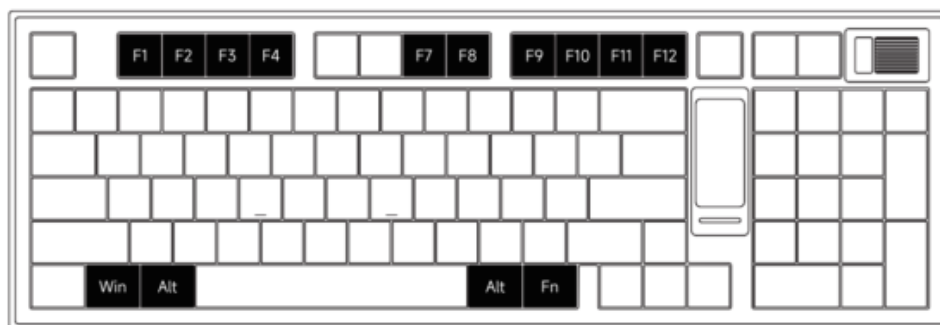

Fn+	F1	=	Decrease display brightness
	F2		Increase display brightness
	F3		Open mission control
	F4		Activate Siri
	F7		Skip back (Audio)
	F8		Pause/Play (Audio)
	F9		Skip forward (Audio)
	F10		Mute
	F11		Volume down
	F12		Volume up


L_Win	=	L_Option
L_Alt		L_Command
R_Alt		R_Command

Back light Settings

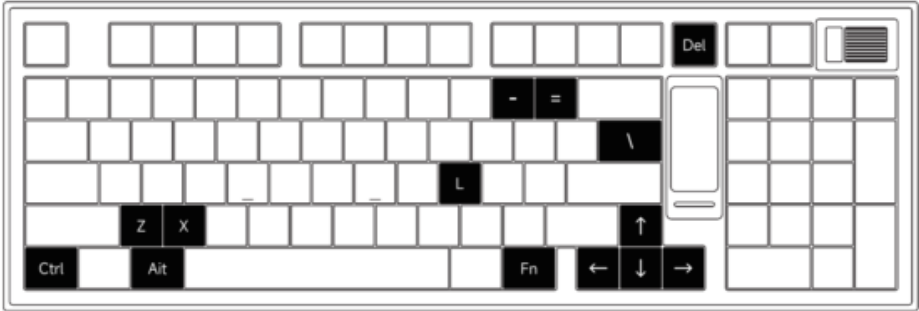

Fn+	Del	=	Effect1 Effect2 Effect3 Effect4 Effect5 Effect6 Effect7 Effect8 Effect9 Effect10 Effect11 Effect12 Effect13 Effect14 Effect15 Effect16 Effect17 Effect18 Effect19, Effect20
	↑		Bright
	↓		Dim
	←		Set animation direction to left
	→		Set animation direction to right
	-		Slower Animation
	=		Faster Animation
	/		This shortcut allows you to set the backlight color to 7 single color with RGB loop effect
	Z		Adjust side LED brightness (5 levels)
	X		Adjust side LED animation speed (5 levels)
	L		Light Off/On
	Left Ctrl		Adjust side LED mode, including Lights OFF (6 levels)
	Left Alt		Side LED mode: This shortcut allows you to set the light to 7 single colors with an RGB loop effect

Wireless/Wired Connection Guide

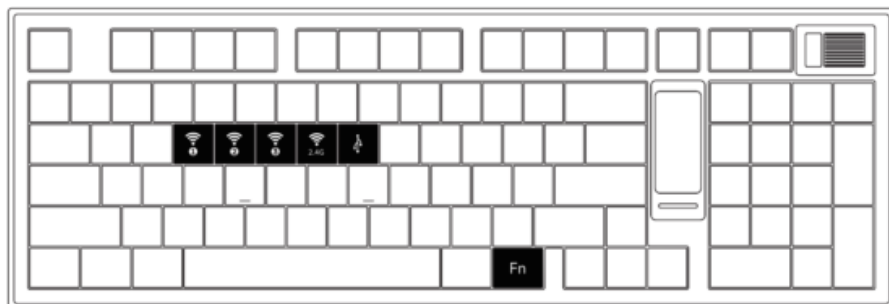

Fn+	E	=	Bluetooth Device 1	Short press to reconnect Long press to pair
	R		Bluetooth Device 2	
	T		Bluetooth Device 3	
	Y		2.4G Wireless Device	
	U		Wired Mode	

Bluetooth Pairing

After the keyboard is turned on, press Fn+E/R/T to enter Bluetooth mode. Press and hold the F+E/R/T key combination for 3 seconds, and the keyboard will enter the pairing state. The blue indicator light will flash quickly, and the indicator light will stay on for 2 seconds after connecting, if the device is not connected, the indicator light will go out and the keyboard will enter sleep mode.

2.4G Pairing

After turning on the keyboard, press FN+Y to enter 2.4G mode. Then press and hold the FN+Y Key combination for 3 seconds to enter pairing mode. Then insert in the receiver, and the indicator light will flash quickly. Once the pairing is successful the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

In wireless mode, press Fi+Space key combination to check battery power. When the battery is below 30%, the space key will light up red; 30-50% will light up orange, 50-70% will light up purple, 70-90% will light up yellow, 90-100% will light up green.

Low 30%	Low 50%	Low 70%	Low 90%	Low 100%	Full
Red Light	Orange Light	Purple Light	Yellow Light	Green Light	

Key/Lighting Effects Customisation instruction

1. The keys can be remapped and RGB can be programmed in the driver in any of the connection mode
2. Keyboard lighting can be coordinated with the driver to achieve audio visualizer
3. Please download the Akko Cloud driver on our website
4. Users can download the driver via en.akkogear.com

Akko Warranty and Service Statement

1. Akko provides One-Year warranty for customers in mainland China, For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs, Akko will also provide instructions if users prefer to repair the keyboard by themselves, However, users shall take full responsibility for any loss happened during self-repair
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Company: Shenzhen Yinchon Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community Industrial Zone, Baofan District, Shenzhen, China

Tel: 075523216420

Website: www.akkogear.com

Origin: Shenzhen, China



WARNING:

Water and Beverages can't be poured into the Keyboard.




Made in China

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.
www.akkogear.com


@akkogear



Akko



Documents / Resources

	<p>Akko 5098B Mechanical Keyboard [pdf] Instruction Manual 5098, 5098B, 5098B Mechanical Keyboard, 5098B, Mechanical Keyboard, Keyboard</p>
---	---

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.