



ALLEGRO microSystems CT416-20AC Evaluation Board User Guide

[Home](#) » [ALLEGRO microsystems](#) » ALLEGRO microSystems CT416-20AC Evaluation Board User Guide 

ALLEGRO microSystems CT416-20AC Evaluation Board



Contents

- 1 DESCRIPTION
- 2 FEATURES
- 3 EVALUATION BOARD CONTENTS
- 4 USING THE EVALUATION BOARD
- 5 Introduction
- 6 Power Input
- 7 Board Configuration
- 8 SCHEMATIC
- 9 LAYOUT
- 10 BILL OF MATERIALS
- 11 RELATED LINKS
- 12 Revision History
- 13 Customer Support
- 14 Documents / Resources
 - 14.1 References
- 15 Related Posts

DESCRIPTION

The Allegro MicroSystems CTD416-20AC evaluation board contains the CT416—XtremeSense™ tunnel magnetoresistance (TMR) integrated circuit (IC). This user guide describes the operation and use of the evaluation board as an engineering tool for evaluating the CT416 IC performance in application.

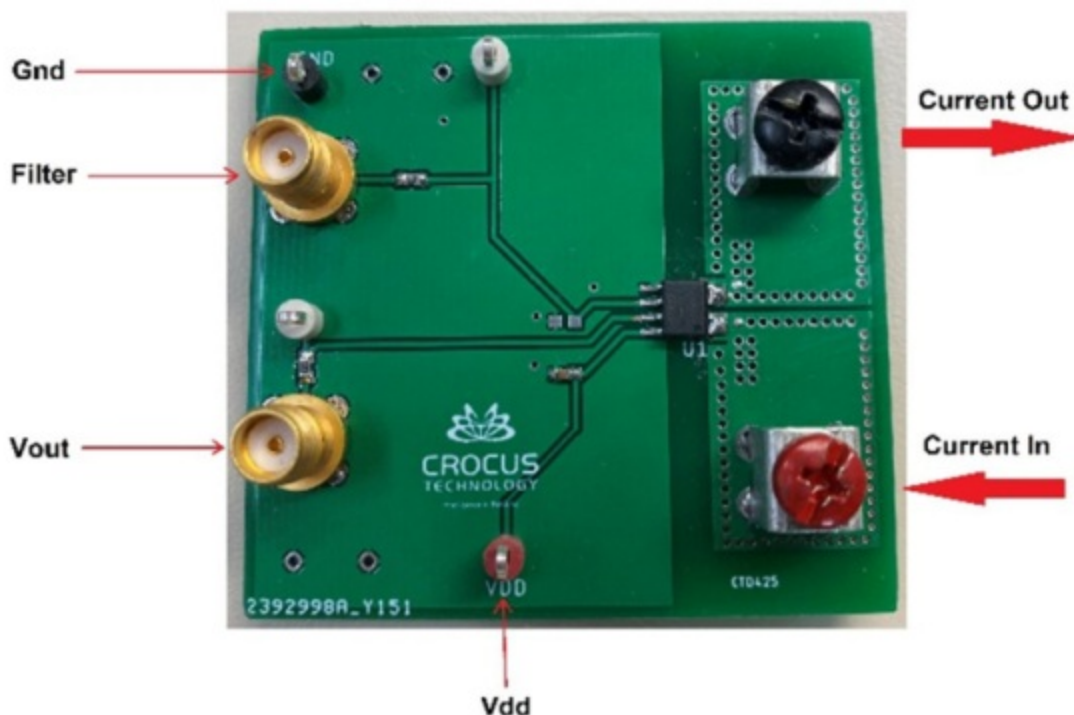


Figure 1: CT416-20AC Evaluation Board

FEATURES

- Integrated current-carrying conductor (CCC)
- Linear analog output voltage
- Total error output $\leq \pm 1.0\%$ FS

- 1 MHz bandwidth
- Response time: 300 ns
- Low noise: 9 to 13.5 mA rms at fBW = 100 kHz
- Supply voltage: 4.75 to 5.2 V
- Filter function to reduce noise on output pin
- Immunity to common mode fields: -54 dB

EVALUATION BOARD CONTENTS

- CT416-20AC evaluation board

Table 1: CT416-20AC Evaluation Board Configurations

Configuration Name	Part Number	Sensitivity	Bandwidth
CT416-20AC Evaluation Board	CTD416-HSN820MR	50 mV/V	1 MHz

Table 2: General Specifications

Specification	Min	Nom	Max	Units
Input Operating Temperature	-40	—	125	°C
Input Operating Current	-20	—	20	A

USING THE EVALUATION BOARD

Introduction

The CT416 is a high-bandwidth and ultra-low-noise integrated contact current sensor that uses Allegro-patented Xtreme Sense™ TMR technology to enable high-accuracy current measurements for many industrial, consumer, and automotive applications. The device supports eight current ranges where the integrated current-carrying conductor (CCC) handles up to 65 A of current and generates a current measurement as a linear analog output voltage. The device achieves a total output error of less than ±1% full-scale (FS).The device has a 300 ns output response time when the current consumption is ~6 mA, and it is immune to common-mode fields. The CT416 has a filter function to reduce the noise on the output pin. The CT416 is offered in an industry-standard 8-lead small-outline integrated circuit (SOIC) package that is green and Restriction of Hazardous Substances (RoHS) compliant.

This section provides an overview of the connections and configuration options of the CT416 evaluation board. The proper configuration is highlighted and detailed in Figure 2. The CT416 datasheet contains detailed information about the use and functionality of each pin and detailed specifications about the sensor. For more detailed information, refer to the product datasheet.

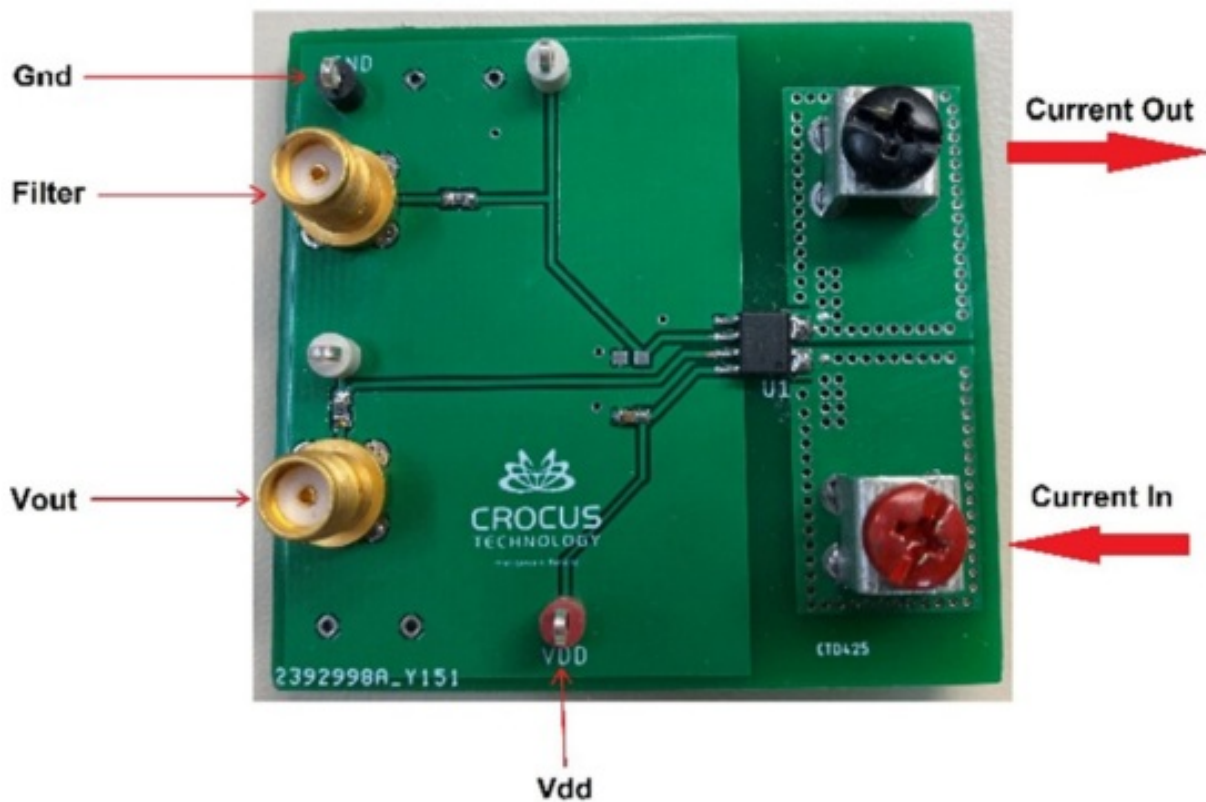


Figure 2: CT416-20AC Evaluation Board


Power Input

The two large connectors (with screws) are used to connect and drive the external current to be measured. Due to the PCB trace thermal limitation of the CT416 evaluation board, do not exceed 20 APK.

Board Configuration

A fully assembled evaluation board is illustrated in Figure 1 and Figure 2. The current to be measured is connected to the screw connectors located on the right side of the PCB. These connectors are galvanically isolated from the rest of the PCB. The CT416 can be biased by applying a 5 V bias voltage between the VDD and GND pins on the PCB and its output can be measured either from the VOUT SMA connector or the VOUT header pin on the PCB.

SCHEMATIC

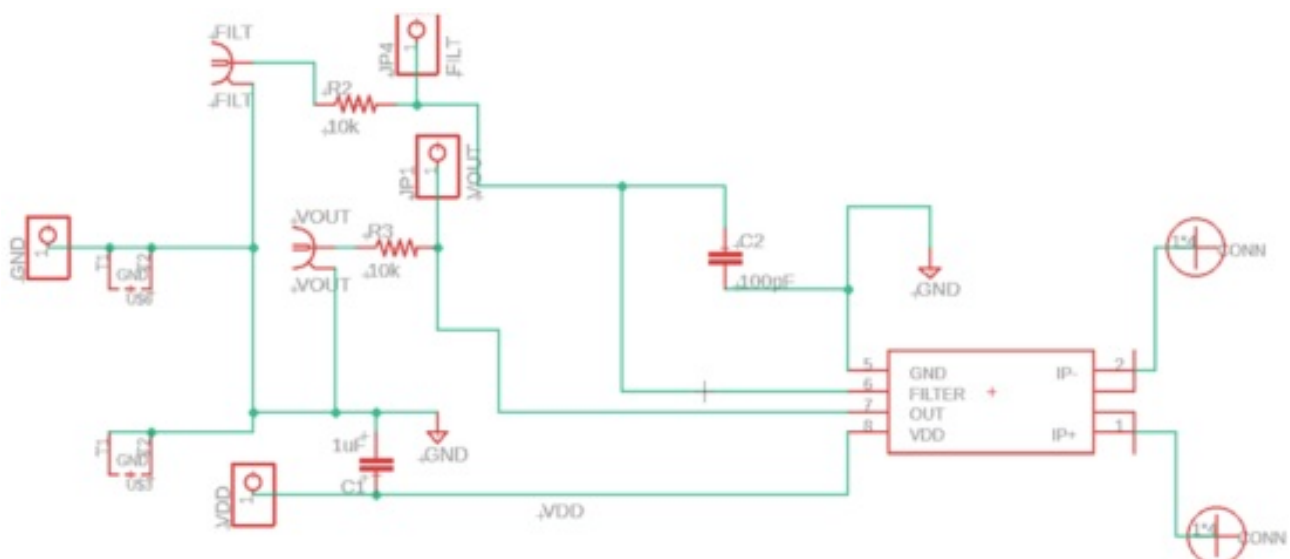

The schematic of the CT416-20AC evaluation board is shown in **Figure 3**.

Figure 3: CT416-20AC Evaluation Board Schematic

LAYOUT

The top and bottom layers of the CT416-20AC evaluation board are shown in Figure 4 and Figure 5, respectively.

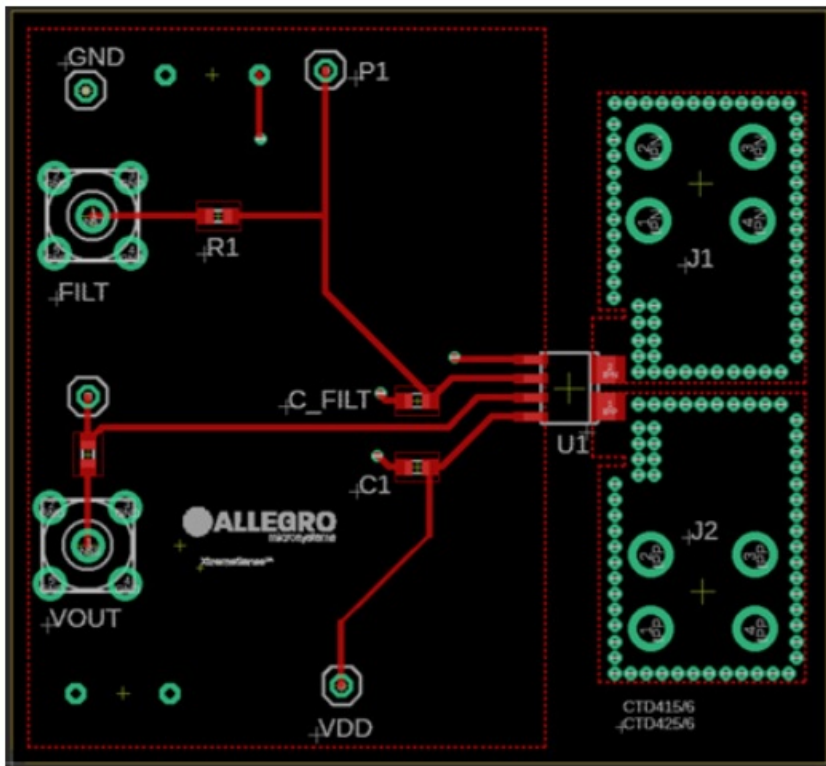


Figure 4: Top Layer

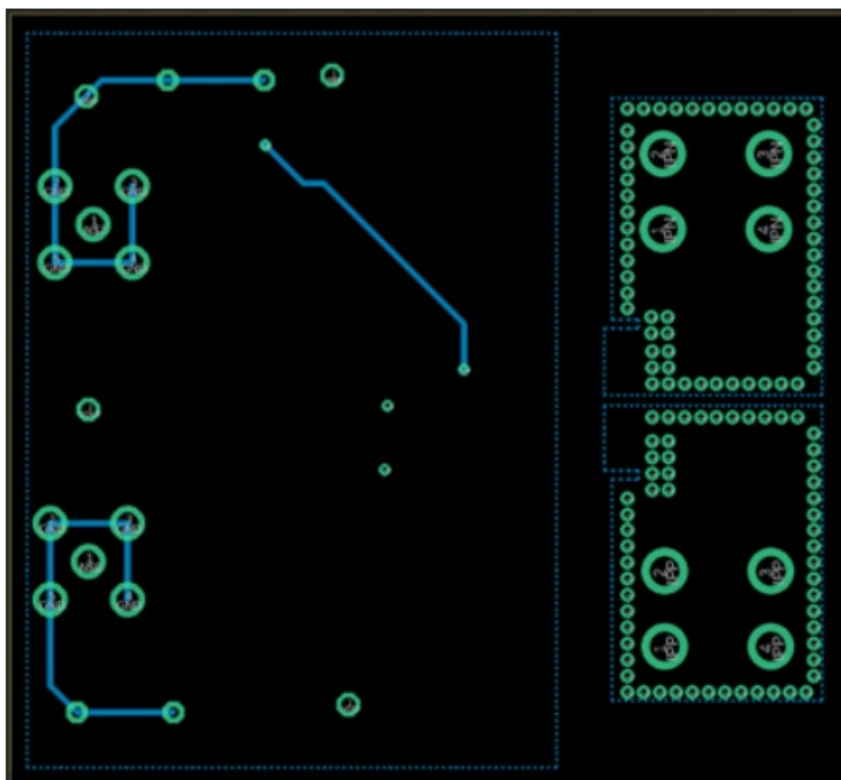


Figure 5: Bottom Layer

BILL OF MATERIALS

Designator	Quantity	Description	Manufacturer	Manufacturer Part Number
PCB	1	CTD416-20AC Evaluation Board	Allegro Micro Systems	—
U1	1	CT416 Sensor	Allegro Micro Systems	—
J1, J2	2	Screw Connectors	Key stone, Block master	534-7701
VOUT, FILT	2	SMA Connectors	Clinch Connectivity	142-0701-201
C1	1	1.0 μ F, X5R or Better SMD Capacitor (Bypass Capacitor) 0603	TDK	CGA3E1X7R1E105K080AC
R1, R2	2	10 k Ω , \pm 10% or Better SMD Resistor 0603	Panasonic, AVX, Yageo	ERJ-3GEYJ103V
GND, VDD, P2, P1	4	Male Header Connectors—Single pin	Würth Elektronik	732-5334-ND
J2	1	M3 Terminal Screw Red	Key stone	36-7701-2
J1	1	M3 Terminal Screw Black	Key stone	36-7701-3

RELATED LINKS

CT416 product page:
<https://www.allegromicro.com/en/products/sense/current-sensor-ics/zero-to-fifty-amp-integrated-conductor-sensor-ics/ct415-6-7-8>

For samples or applications support contact, visit <https://www.allegromicro.com/en/about-allegro/contact-us/technical-assistance> and navigate to the appropriate region.

Revision History

Number	Date	Description
—	August 9, 2024	Initial release

Customer Support

Copyright 2024, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products.

Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro’s products are not to be used in any devices or systems, including but not limited to life support devices or


systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm. The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.

Allegro MicroSystems
955 Perimeter Road
Manchester, NH 03103-3353 U.S.A.
www.allegromicro.com



Documents / Resources

	<p>ALLEGRO microSystems CT416-20AC Evaluation Board [pdf] User Guide CT416-20AC Evaluation Board, CT416-20AC, Evaluation Board, Board</p>
--	---

References

- [User Manual](#)

Manuals, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.