

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [hykolity](#) /

› [hykolity 32 Inch Oval LED Ceiling Light Instruction Manual](#)

hykolity HBCE-32C-N5CCT

hykolity 32 Inch Oval LED Ceiling Light Instruction Manual

Model: HBCE-32C-N5CCT

IMPORTANT SAFETY INFORMATION

Please read these instructions carefully before installation and retain them for future reference. Ensure all electrical work is performed by a qualified electrician to prevent electric shock or fire hazards. Always turn off power at the circuit breaker before beginning installation.

- **WARNING:** Risk of electric shock. Disconnect power at the fuse box or circuit breaker before installing or servicing.
- **WARNING:** Risk of fire. Use only in circuits rated for the fixture's wattage.
- Do not use with dimmers not specified as compatible.
- Ensure all connections are secure and properly insulated.
- This fixture is designed for indoor use only.

PRODUCT OVERVIEW

The hykolity 32 Inch Oval LED Ceiling Light is a modern, energy-efficient flush mount fixture designed to provide versatile illumination for various indoor spaces. Its low-profile design and brushed nickel finish complement contemporary decor while offering adjustable color temperature and dimming capabilities.

- **Modern Flush Mount Design:** Installs flush to the ceiling, ideal for spaces with limited clearance.
- **Adjustable Color Temperature (CCT):** Select from 2700K (soft white), 3000K (warm white), 3500K (natural white), 4000K (daylight white), or 5000K (cool white).
- **Dimmable:** Compatible with standard triac dimmers for customizable brightness.
- **Energy Efficient:** Uses 60W to deliver 4000 lumens, comparable to a 300W incandescent fixture.
- **ETL Listed:** Certified for safety, reducing electrical and fire risks.
- **Versatile Application:** Suitable for kitchens, bedrooms, living rooms, hallways, basements, and more.



32in 60W Oval LED Ceiling Light

(Color Temperature Selectable)



120°
Beam Angle



4000LM



DIMMABLE



CCT

5 colors
selectable



INTERTEK
ETL
C
US



5

5 Year Warranty - 5 Year Warranty



Image: Overview of the hykolity 32 Inch Oval LED Ceiling Light, showcasing its 120° beam angle, 4000LM brightness, dimmable function, 5 CCT options, ETL listing, and 5-year warranty. It highlights its 60W power consumption replacing up to 300W incandescent.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- LED Ceiling Light Fixture
- Mounting Plate
- Wire Nuts
- Mounting Screws
- Drywall Anchors
- Instruction Manual

32" OVAL LED CEILING LIGHT DIMENSIONS



Image: Detailed dimensions of the 32-inch oval LED ceiling light (32.28 inches long, 18.11 inches wide, 4.72 inches high) and a visual representation of the included hardware: screws, wire nuts, and drywall anchors.

SPECIFICATIONS

Feature	Specification
Brand	hykolity
Model Name	HBCE-32C-N5CCT
Size	32 inch
Color	Brushed Nickel
Material	Plastic
Wattage	60 watts
Brightness	4000 Lumens

Feature	Specification
Color Temperature	2700K/3000K/3500K/4000K/5000K Adjustable
Special Feature	Dimmable
Installation Type	Flush Mount
Power Source	Corded Electric
Item Weight	9.33 pounds
Product Dimensions	32.6 x 18.5 x 4 inches


INSTALLATION INSTRUCTIONS

Follow these steps for safe and proper installation of your LED ceiling light. Always ensure power is OFF at the circuit breaker before starting.


- 1. Remove the Diffuser:** Turn the 4 decorative nuts on the metal ring anti-clockwise to remove the diffuser (B) and shade (C) from the fixture base (A).
- 2. Mark Mounting Positions:** With assistance, temporarily hold the fixture base (A) up to the ceiling to determine the best mounting position. Mark four keyhole locations for mounting.
- 3. Drill Holes:** Drill a hole into the screw locations marked on the ceiling. Use an awl or nail to dimple the screw holes. Install a drywall anchor (BB) and a mounting screw (CC) in each drilled mounting hole, but do not tighten fully.
- 4. Connect Wiring:** Connect the hot and neutral wires from the junction box to the same color wires from the fixture base (A) using wire nuts. Ensure the ground wire is also securely connected.
- 5. Mount Fixture Base:** Secure the fixture base (A) to the ceiling by aligning the keyholes with the mounting screws (CC) and tightening them.
- 6. Set Color Temperature:** Turn on the power and the light. Pull the color temperature toggle switch located on the fixture base to select your desired color temperature (2700K/3000K/3500K/4000K/5000K).
- 7. Reinstall Diffuser:** Refer to step 1 to reinstall the external frame (C) and diffuser shade (B) back onto the fixture base (A) by turning the nuts in the opposite direction.

Installation Instructions


1. Remove the diffuser by turning 4 decorative nuts on metal ring anti-clockwise.

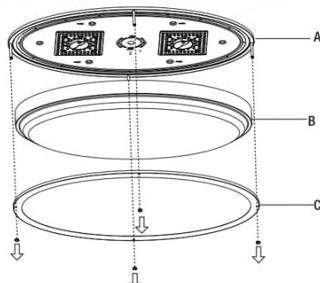


2. With help from another person, temporarily hold the fixture base (A) up to the ceiling to determine the best mounting position, mark four keyhole locations for mounting.

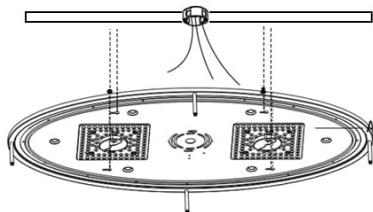


3. Drill a hole into the screw locations marked on the ceiling. You can also use an awl or nail to dimple the screw holes. Install a drywall anchor (BB) and a mounting screw (CC) in each drilled mounting hole, but do not tighten fully.

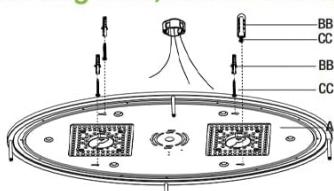


4. Connect the hot and neutral wires from the J-box to the same color wires from the fixture base (A).

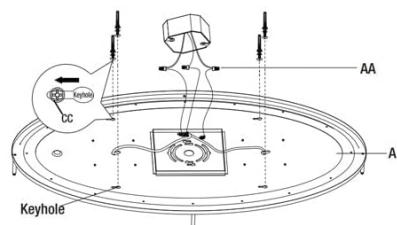

5. Turn on the power and light the lamp, and pull the lamp color temperature toggle switch to the desired color temperature gear

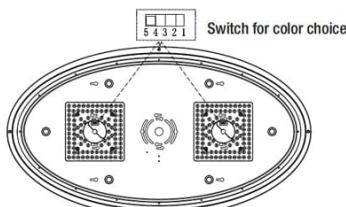

5. refer to step 1 to reinstall the external frame (C) and diffuser shade (B) back on the fixture base (A) with screw nuts in the opposite direction.

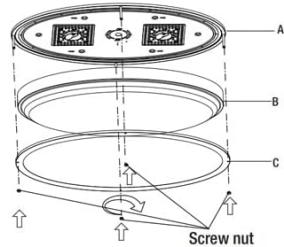

Warning: Turn off the power before installation

Image: Visual guide for the installation process, showing how to remove the diffuser, mark mounting points, connect wires, and reassemble the fixture. A warning to turn off power before installation is prominently displayed.

Your browser does not support the video tag.

Video: A seller-provided video demonstrating the installation process and highlighting how this light fixture can replace older, less appealing ceiling lights, enhancing the room's aesthetic.

OPERATING INSTRUCTIONS

Adjusting Color Temperature (CCT)

The hykolity LED Ceiling Light offers five selectable color temperatures to suit your preference and room ambiance. The CCT switch is located on the fixture base and can be adjusted during installation or by temporarily removing the diffuser.

- **2700K:** Soft White, ideal for bedrooms and cozy spaces.
- **3000K:** Warm White, suitable for bathrooms and inviting areas.
- **3500K:** Natural White, perfect for kitchens and general task lighting.

- **4000K:** Daylight White, great for living rooms and workspaces.
- **5000K:** Cool White, best for meeting rooms or areas requiring bright, crisp light.

CHOOSE YOUR COLOR TEMPERATURE



Bedroom 2700K



Bathroom 3000K



Kitchen 3500K



Living Room 4000K



Meeting room 5000K

Image: Illustrates the five selectable color temperatures (2700K, 3000K, 3500K, 4000K, 5000K) and suggests appropriate room applications for each, such as bedroom (2700K), bathroom (3000K), kitchen (3500K), living room (4000K), and meeting room (5000K).

Dimming Functionality

This fixture is compatible with standard triac dimmers, allowing you to adjust the light output from 10% to 100% for optimal ambiance and energy savings. Ensure your dimmer switch is compatible with LED fixtures.

Adjust Brightness

Smooth Dimming From 10% To 100%, No Flicker, No Buzzing,
Reduce Eye Fatigue, Provide Good Lighting Performance



Image: Demonstrates the smooth dimming capability from 10% to 100% with switch control, highlighting no flicker or buzzing. A table lists various compatible dimmer models from brands like Lutron and Leviton.

MAINTENANCE

To ensure the longevity and optimal performance of your hykolity LED Ceiling Light, follow these simple maintenance guidelines:

- Cleaning:** Always turn off power before cleaning. Use a soft, dry, or slightly damp cloth to wipe the fixture. Avoid abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish or electrical components.
- Bulb Replacement:** This fixture features an integrated LED design, meaning there are no bulbs to replace. The LED components are designed for long-term use.
- Inspection:** Periodically check the fixture for any signs of damage or loose connections. If any issues are found, consult a qualified electrician.

TROUBLESHOOTING

If you encounter any issues with your hykolity LED Ceiling Light, refer to the following common problems and solutions:

- Light does not turn on:**
 - Check if the power is on at the circuit breaker.
 - Ensure all wire connections are secure.
 - Verify that the wall switch is in the ON position.
- Light flickers or dims unexpectedly:**
 - Ensure your dimmer switch is compatible with LED fixtures.
 - Check for loose wiring connections.
 - Verify that the fixture's wattage is appropriate for the circuit.

- **Incorrect color temperature:**

- Adjust the CCT toggle switch located on the fixture base to your desired setting.

If the problem persists after attempting these solutions, please contact customer support.

WARRANTY AND SUPPORT

hykolity is committed to ensuring your satisfaction with our products. This LED ceiling light comes with a 5-year warranty, covering defects in materials and workmanship under normal use.

Should you have any inquiries regarding this product, require technical assistance, or need to claim warranty support, please do not hesitate to contact our dedicated support team. We are committed to ensuring a smooth purchasing and ownership experience.

Contact Information:

- For support, please visit the hykolity store on Amazon or refer to the contact details provided in your product packaging.