

ANLY APR-4S 3 Phase Sequence Protection Relay User Guide

Contents

1 ANLY CONTROLLER

1.1 APR-4S 3-PHASE SEQUENCE PROTECTION RELAY

1.1.1 CHARACTERISTIC :

1.1.2 SPECIFICATION :

1.1.3 CONNECTION :

1.1.4 TIMING CHART :

1.1.5 DIMENSIONS : (mm)

2 Documents / Resources

2.1 References



ANLY CONTROLLER

APR-4S 3-PHASE SEQUENCE PROTECTION RELAY



CHARACTERISTIC :


- 3-phase voltage and fault detector
- Can detect abnormal condition to prevent damages to the equipments
- Out-of-phase detection while the motor operating
- Install on DIN rail or fix with screw are available and no socket require

SPECIFICATION :

Operating voltage	AC(V) : 208~380, 380~480
Allowable operating voltage range	+20%, -20%
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A resistive load
Reset time	MAX 3sec
Power consumption	Approx. 2VA(AC 220V 60Hz)
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C (without condensation & freezing)
Ambient humidity	MAX 85%RH (without condensation)
Altitude	MAX 2000m
Weight	Approx. 106g


Product is subject to change without notice.

CONNECTION :

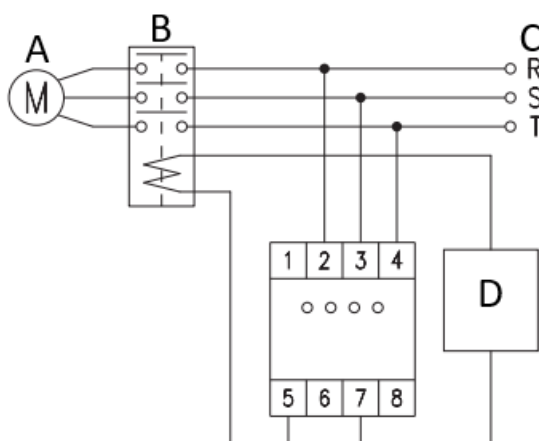

A: MOTOR
B: MG.SW.
C: LINE
D: MG.SW. Coil Voltage


TIMING CHART :

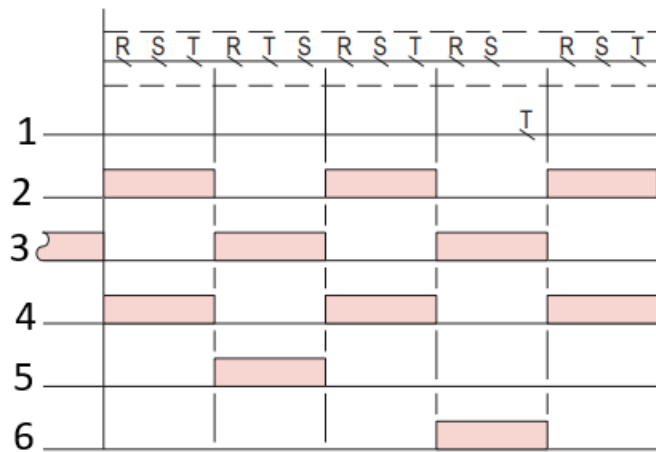

1. LINE
2. N.O.(5_7)
3. N.C. (5_6)
4. Normal LED
5. Reverse LED
6. Lose LED

DIMENSIONS : (mm)

N type(Surface Mounting):

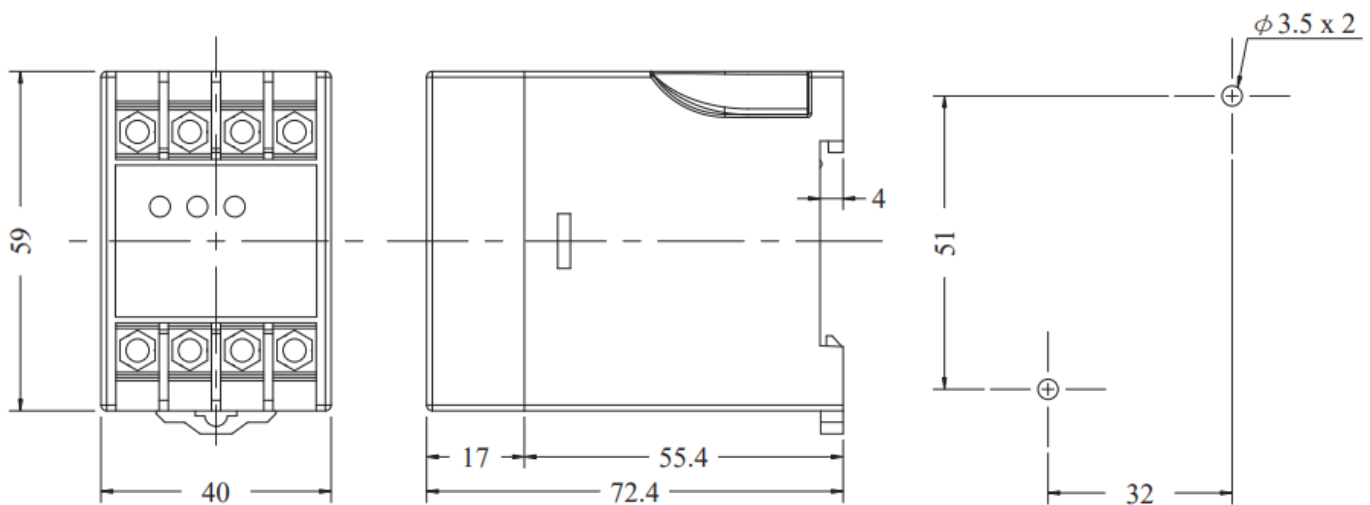

Tolerance:±0.1

ONLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ONLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan

TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

HONG KONG OFFICE : ONLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong

TEL: +852-2397-2505 FAX: +852-2397-6080

CHINA OFFICE : ANLY TECHNOLOGY (WUXI) CO., LTD.

2F, Building A, Plot 1, No. 28, Zhanhong Rd., Xinwu Dist., Wuxi, Jiangsu, P.R.China

TEL: +86-510-85304801~3

MALAYSIA OFFICE : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia

TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

INDONESIA OFFICE : PT. ANLY ELECTRONICS INDONESIA

Jl. Pangeran Jayakarta 117/B9, Jakarta Pusat, 10730 Indonesia

TEL: +62-21-624-8436 FAX: +62-21-626-1228

NO.APR4S-W-A

Documents / Resources

	ANLY APR-4S 3 Phase Sequence Protection Relay [pdf] User Guide APR-4S, APR-4S 3 Phase Sequence Protection Relay, APR-4S Protection Relay, 3 Phase Sequence Protection Relay, 3 Phase Sequence Relay, Protection Relay, Relay
---	---

References

-  anly.com.tw
- [User Manual](#)

Manuals+. [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.