



ANLY ATF-NF Off Delay Timer Instructions

[Home](#) » [ANLY](#) » ANLY ATF-NF Off Delay Timer Instructions 



Contents

- [1 ANLY ATF-NF Off Delay Timer Instructions](#)
- [2 CHARACTERISTIC :](#)
- [3 SPECIFICATION :](#)
- [4 TYPE SELECTION :](#)
- [5 CONNECTION :](#)
- [6 TIMING CHART :](#)
- [7 DIMENSIONS : \(mm\)](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

ANLY ATF-NF Off Delay Timer Instructions



CHARACTERISTIC :

- Off delay timer with adjustable time range
- Delay time up to 60min
- External manual reset available
- 2C Inst.+Delayed output contacts Type available


SPECIFICATION :

Operating voltage	DC(V): 12, 24 AC(V): 12, 24, 110, 220, 240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.3s
Power consumption	Approx. 3VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C (without condensation & freezing)
Ambient humidity	MAX 85%RH (without condensation)
Altitude	MAX 2000m
Weight	Approx. 225g


TYPE SELECTION :

Output contact	1C	2C Delayed	2C Inst.+Delayed	Power-on time	Contact rating
Type	ATF-NF / YF	ATF-NF2 / YF2	ATF-NF4 / YF4	3s~10m(0.5s以上) 30m~60m(1s以上)	250VAC 5A
Manual reset	Contact input(1-4)	- - - -	- - - -		
Time range	3s, 6s, 10s, 30s, 60s, 3m, 10m, 30m, 60m				

CONNECTION :

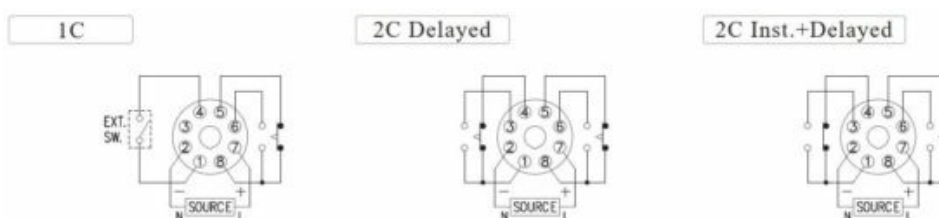


TIMING CHART :

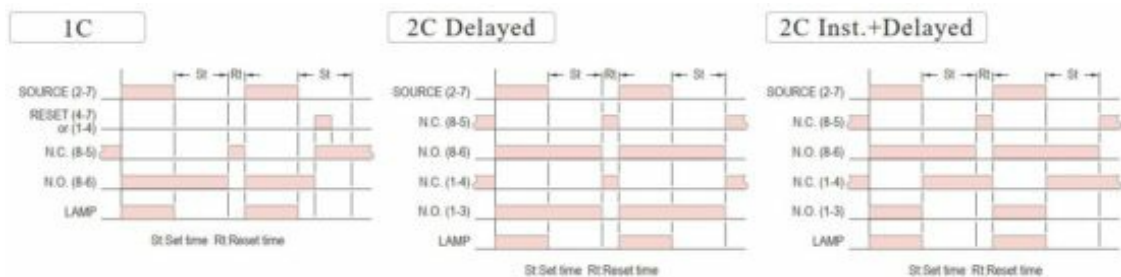


DIMENSIONS : (mm)

N type(Surface Mounting): Using 8PFA Socket

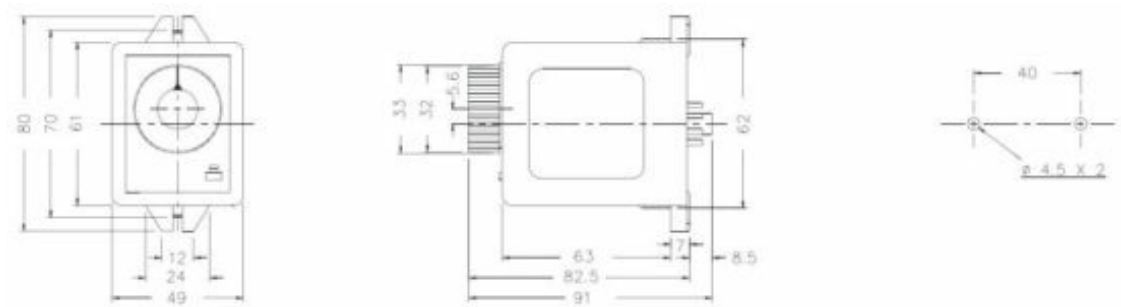

Y type(Flush Mounting): Using US-08 Socket or P3G-08 Socket

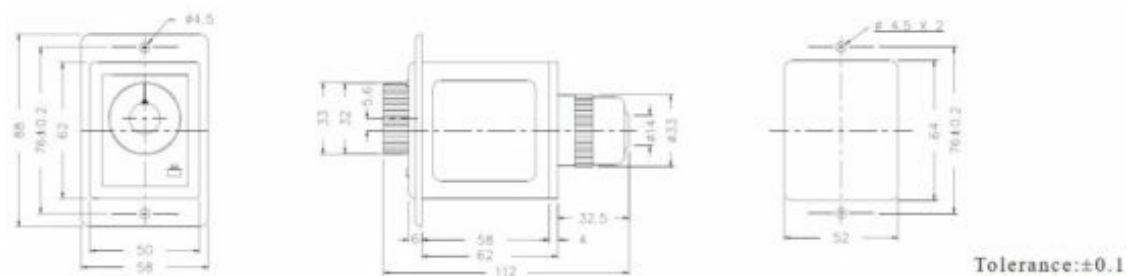

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No. 19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan

TEC: +886-2-2996-3202 FAX: +886-2-2996-2017

HONG KONG OFFICE : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong

TEC: +852-2397-2505 FAX: +852-2397-6080

CHINA OFFICE

: ANLY TECHNOLOGY (WUXI) CO., LTD.

2F, Building A, Plot 1, No. 28, Zhanhong Rd., Xinqu Dist., Wuxi, Jiangsu, P.R.China

TEC: +86-510-85304801-3

MALAYSIA OFFICE

: JUSTY ELECTRONICS (M) SDN, BHD.

No. 1, Jalan 6189B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia

TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

INDONESIA OFFICE

: PT. ANLY ELECTRONICS INDONESIA

Jl. Pangeran Jayakarta 1 171B9, Jakarta Pusat, 10730 Indonesia

TEL: +62-21-624-8436 FAX: +62-21-626-1228

Read More About This Manual & Download PDF:

Documents / Resources

	ANLY ATF-NF Off Delay Timer [pdf] Instructions ATF-NF, YF ATF-NF2, YF2 ATF-NF4, YF4, ATF-NF Off Delay Timer, ATF-NF, Off Delay Timer, Delay Timer, Timer
--	---

References

- anly.com.tw
- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.