

E9 Pro Bitmain Antminer Miner Value



E9 Pro Bitmain Antminer Miner Value Instruction Manual

[Home](#) » [ANTMINER](#) » E9 Pro Bitmain Antminer Miner Value Instruction Manual 

Contents

- [1 E9 Pro Bitmain Antminer Miner Value](#)
- [2 Specification](#)
- [3 Performance Curves](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)



E9 Pro Bitmain Antminer Miner Value



Specification

Product Glance	Value
Model	E9 Pro
Version	260-E
Cryptoalgorithm Coins	Etchash/Ethash ETC/ETHW/ETHF
Typical Hashrate, MH/s(1-1)	3680
Power on wall @25τ, Watt(1-1)	2200
Power efficiency on wall@25τ, J/MH (1-1)	0.6
Memory, GB	7


Detailed Characteristics	Value
Power supply	
Power supply AC input voltage range, V(2-1)	200-240VAC
Power supply AC Input Frequency Range, Hz	50-60
Power supply AC Input current, A(2-2)	20
Adapted AC output power requirement, W(2-3)	4000
Hardware configuration	
Quantity of hash chips	16
Quantity of hash boards	2
Network connection mode	RJ45 Ethernet 10/100M
Server size (Length*Width*Height, w/o package), mm	550*195.5*310
Server size (Length*Width*Height, with package), mm	722*322*427
Net weight, kg	20.2
Gross weight, kg	22.0
Noise, dBA @2 (2-4)	70
Environment requirements	
Operation temperature, °C	0~40
Storage temperature, °C	-20~70
Operation humidity (non-condensing), RH	10~90%
Operational altitude, m(2-5)	≤2000

Notes:


1. The Hashrate value, Power on wall, and Power efficiency on wall are all typical values. The actual Hashrate value fluctuates by 3%, and the actual Power on wall and Power efficiency on wall fluctuate by 5%.
2. Caution: Wrong input voltage may cause server damaged.
 1. Two AC input, 10 A per wire.
 2. Caution: It is strongly recommended that the power on wall of the miner does not exceed this value.
 3. Max condition: Fan is under max RPM(rotation per minute).
 4. When the miner is used at an altitude from 900m to 2000m, the highest operating temperature decreases by 1°C for every increase of 300m

Performance Curves

Hashrate Vs. Ambient Temperature

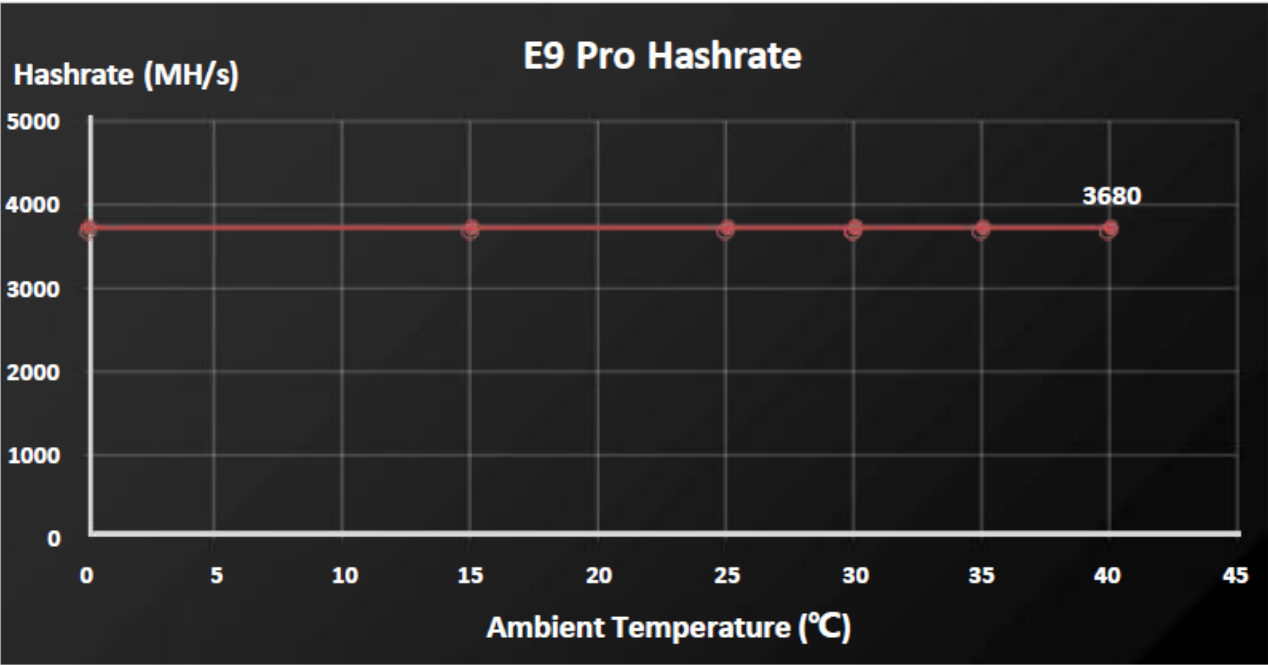

J/M Vs. Ambient Temperature E9

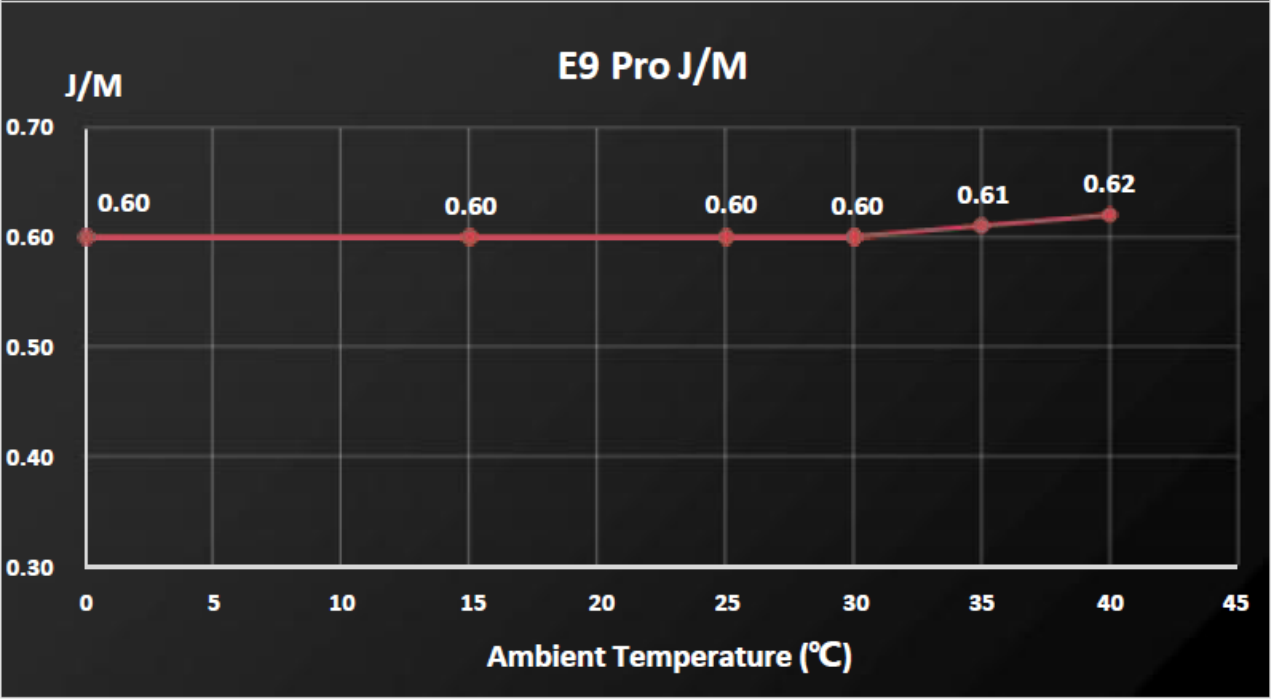

Documents / Resources

	ANTMINER E9 Pro Bitmain Antminer Miner Value [pdf] Instruction Manual E9 Pro Bitmain Antminer Miner Value, E9 Pro, Bitmain Antminer Miner Value, Antminer Miner Value, Miner Value, Value
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.