

SentrySafe FPW082KSB

SentrySafe Fireproof and Waterproof Shelf Safe User Manual

Brand: SentrySafe | Model: FPW082KSB

1. OVERVIEW

The SentrySafe FPW082KSB is a fireproof and waterproof shelf safe designed to protect your valuable documents and possessions. This safe is UL Classified to protect contents for 1 hour in temperatures up to 1700°F (927°C) and ETL Verified for water resistance in up to 5 inches of water for 24 hours, even when bolted down. It features a dial combination lock with an override key for secure access.



Figure 1.1: Front view of the SentrySafe FPW082KSB safe.

2. KEY FEATURES

- **Fire Protection:** UL Classified for 1 hour at 1700°F (927°C).
- **Water Protection:** ETL Verified for 24 hours in up to 5 inches of water, even when bolted down.
- **Locking Mechanism:** Dial combination lock with an override key for alternative access.
- **Durable Construction:** Features a durable resin-wrapped concrete material and hardened steel deadbolts.
- **Audible Confirmation:** Safe door audibly confirms when it is securely closed.
- **Interior Organization:** Includes an adjustable shelf, key hooks, and a door pocket for efficient storage.



Figure 2.1: Illustration of the multi-layered fire protection.

3. SETUP

3.1 Unboxing and Placement

Carefully remove the safe from its packaging. Due to its weight (approximately 55 lbs), it is recommended to have

assistance during unboxing and placement. Choose a suitable location for your safe, ensuring it is on a stable, level surface. Consider placing it in an area where it is less likely to be affected by falling debris in the event of structural collapse during a fire, such as a basement.



Figure 3.1: Example placement of the safe on a sturdy surface.

3.2 Bolt-Down Installation (Optional)

The safe includes a bolt-down kit for securing it to the floor or a wall. This feature enhances security against theft. The newly designed bolt-down kit maintains the integrity of the safe's water protection. Follow the instructions provided in the separate bolt-down kit manual for proper installation. Ensure the chosen surface can support the safe's weight and the force of bolting.



Figure 3.2: Water-resistant gasket and watertight bolt-down hardware.

4. OPERATING INSTRUCTIONS

4.1 Opening with Dial Combination

Your safe comes with a factory-set 3-number combination. Locate this combination in the owner's manual or on a tag attached to the safe. To open:

1. Turn the dial to the right at least four full turns, stopping on the first number of your combination the fourth time it aligns with the opening index mark.
2. Turn the dial to the left, passing the second number once, and stopping on the second number the second time it aligns with the opening index mark.
3. Turn the dial to the right, stopping on the third number the first time it aligns with the opening index mark.
4. Turn the handle to open the safe door.



Figure 4.1: Operating the dial combination and using the override key.

4.2 Using the Override Key

In case of a forgotten combination or for quick access, an override key is provided. Insert the override key into the keyhole located near the dial and turn it to unlock. Then, turn the safe handle to open the door. Ensure the override key is stored securely outside the safe.

4.3 Closing and Locking the Safe

To close the safe, push the door firmly shut. The safe door will audibly confirm when it is closed and the deadbolts engage automatically. Ensure the handle is in the locked position. For maximum security, always rotate the dial after closing the door to scramble the combination.



AUDIBLE
Confirmation



HARDENED STEEL
AUTOMATIC DEADBOLT ENGAGEMENT

Figure 4.2: Automatic deadbolt engagement and audible confirmation.



EFFICIENT ORGANIZATION SHELF ACCESSORY INCLUDED

Figure 4.3: Efficient interior organization with adjustable shelf and key hooks.

5. MAINTENANCE

Regular maintenance ensures the longevity and proper functioning of your SentrySafe. Keep the exterior of the safe clean with a soft, damp cloth. Avoid abrasive cleaners. Periodically check the door seal for any signs of wear or damage to maintain its waterproof integrity. If the dial mechanism feels stiff, a small amount of lubricant can be applied to the moving parts, as suggested by some users, but always consult SentrySafe support if unsure.

6. TROUBLESHOOTING

6.1 Door Not Closing/Locking Properly


If the safe door does not close or lock correctly, ensure no items are obstructing the door or the locking bolts. Check that the handle is fully engaged. Sometimes, the locking mechanism may require lubrication. Apply a small amount of a suitable lubricant to the bolts and latch mechanism. If the issue persists, contact SentrySafe customer support.

6.2 Forgotten Combination

If you forget your combination, use the provided override key to open the safe. It is highly recommended to record your combination in a secure location separate from the safe. For assistance with combination recovery, contact SentrySafe customer support with your safe's serial number.

7. SPECIFICATIONS

Feature	Detail
Brand	SentrySafe
Model Number	FPW082KSB
Exterior Dimensions (D x W x H)	18.8" x 16.4" x 13.7" (47.8 cm x 41.7 cm x 34.8 cm)
Interior Dimensions (D x W x H)	11.5" x 12.4" x 9.6" (29.2 cm x 31.5 cm x 24.4 cm)
Capacity	0.81 Cubic Feet (22.9 L)
Item Weight	55 Pounds (25 Kgs)
Lock Type	Combination, Key
Material	Durable Resin Wrapped Concrete
Color	Black
Special Features	Fireproof, Waterproof, Audible Alarm
Mounting Type	Freestanding, Tabletop

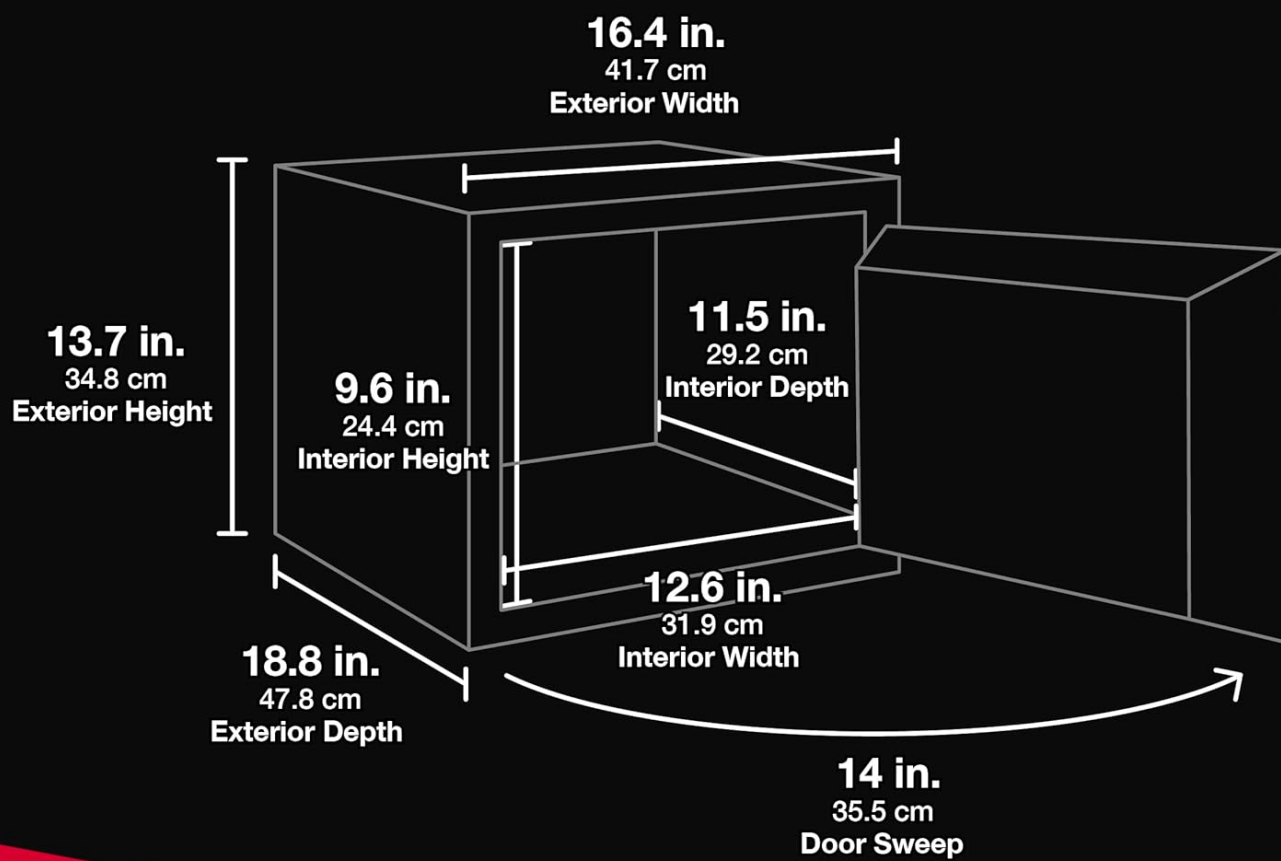

PRODUCT DIMENSIONS

Figure 7.1: Detailed product dimensions.



FIRE
Protection




WATER
Protection



SECURITY
Protection



CAPACITY
0.81 Cu Ft
22.9 L



WEIGHT
55 Lbs
25 Kgs

PRODUCT SPECIFICATIONS

Figure 7.2: Key product specifications at a glance.

8. WARRANTY AND SUPPORT

8.1 Limited Warranty

The SentrySafe FPW082KSB comes with a 1-year limited warranty. Please refer to the warranty documentation included with your purchase for specific terms and conditions.

8.2 After-Fire Replacement Program

SentrySafe offers an After-Fire Replacement Program. Should your safe go through a fire, SentrySafe will send a replacement safe free of charge, ensuring your most treasured valuables are protected for generations to come. Registration on the SentrySafe website is required to be eligible for this program.



AFTER-FIRE REPLACEMENT PROGRAM

Should your safe go through a fire,
SentrySafe will send a replacement safe
free of charge, so the things that matter most
are protected for generations to come.*



*To be eligible for the After-Fire Replacement program, safe must be registered at the SentrySafe website. See owner's manual for complete details.

Figure 8.1: Information on the After-Fire Replacement Program.

8.3 Customer Support

For any questions, technical assistance, or warranty claims, please contact SentrySafe customer support. Visit the official SentrySafe website for contact information and additional resources.

© 2023 SentrySafe. All rights reserved.

A thumbnail image of a document titled "Master Lock IMA SKU List". The document is a multi-column table listing various Master Lock products, including their SKUs, descriptions, and other details. The table is organized into several columns, with the first column likely containing the SKU numbers. The document is a PDF file, as indicated by the "[pdf]" label in the adjacent text block.

[pdf]

Master Lock IMA SKU List Company LLC Listcdn masterlock â° resources list cdn documents |||

IMA SKU List as of 10/18/2023 Brand Product MAP - Master Lock Master Lock
131Q 1 3/16 Covered ... afe FPW082HTC Fireproof and Waterproof Safe with Backlit
Digital Keypad and Override Key SentrySafe **FPW082KSB** Fireproof and Waterproof
Safe with Dial Combination with Override Key SentrySafe **FPW082KSB**...

lang:en score:25 filesize: 177.67 K page_count: 3 document date: 2023-10-18