





**APS2530X
ZigBee PRO
Protocol**

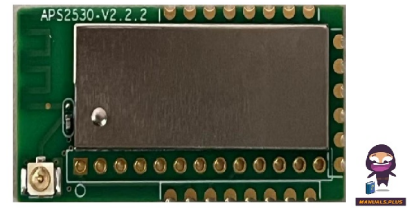

APsystem APS2530X ZigBee PRO Protocol User Manual

[Home](#) » [APsystem](#) » [APsystem APS2530X ZigBee PRO Protocol User Manual](#) 

Contents

- [1 APsystem APS2530X ZigBee PRO Protocol](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 FAQ](#)
- [5 Product Information](#)
- [6 Technical specifications](#)
- [7 Pin Descriptions](#)
- [8 Package Size](#)
- [9 FCC Statement](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



APsystem APS2530X ZigBee PRO Protocol



Specifications

- Model: APS2530X
- Protocol: ZigBee PRO
- RF Operating Frequency: 2405MHz – 2480MHz
- Channel Spacing: 5MHz
- Channel Width: 2MHz
- Modulation Method: OQPSK
- Communication Rate: 250Kbps
- Communication Mechanism: ZigBee

Product Usage Instructions

Installation

To use the APS2530X, follow these steps:

1. Pair the APS2530X with a compatible device equipped with a receiver dongle.
2. Install the APS2530X dongle in the customer's device.
3. Connect the APS2530X using UART to communicate with the customer's device based on the predefined protocol.

Operation

Once installed, the APS2530X will enable communication between devices using RF signals over the ZigBee PRO protocol.

Maintenance

Ensure the APS2530X is securely installed and check for any firmware updates from the manufacturer periodically.

FAQ

- **Q: What is the communication rate of the APS2530X?**
 - A: The communication rate of APS2530X is 250Kbps.
- **Q: How do I pair the APS2530X with a device?**
 - A: To pair the APS2530X, ensure it is installed in a device with a compatible receiver dongle and follow the pairing instructions provided by the manufacturer.
- **Q: Can the APS2530X operate on any RF frequency?**
 - A: The APS2530X operates on the RF frequency range of 2405MHz to 2480MHz.



Product Information

The model used the ZigBee PRO protocol to send RF signals for device communication. The model can be used after pairing with a dedicated device which was installed with a receiver dongle. APS2530X was used as a dongle which need to be installed in the customer's device. It offers UART to communicate with the customer's device according to a predefined protocol.

Technical specifications

- RF operating frequency: 2405MHz ~ 2480MHz
- Channel spacing: 5MHz
- Channel wide 2MHz
- Modulation method: OQPSK
- Communication rate: 250Kbps
- Communication mechanism: applied ZigBee mechanism
- Average operating current <20mA
- Operating voltage 2V-3.6V
- Max remitting current: 20mA
- Max rate 250Kbit/s
- Receiving sensitivity -95dbm
- Receiving current <24mA
- Max receiving distance >100M
- Normal operating receiving distance 100M


Pin Descriptions

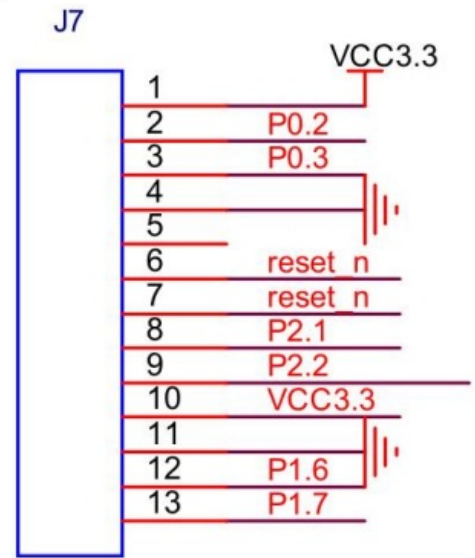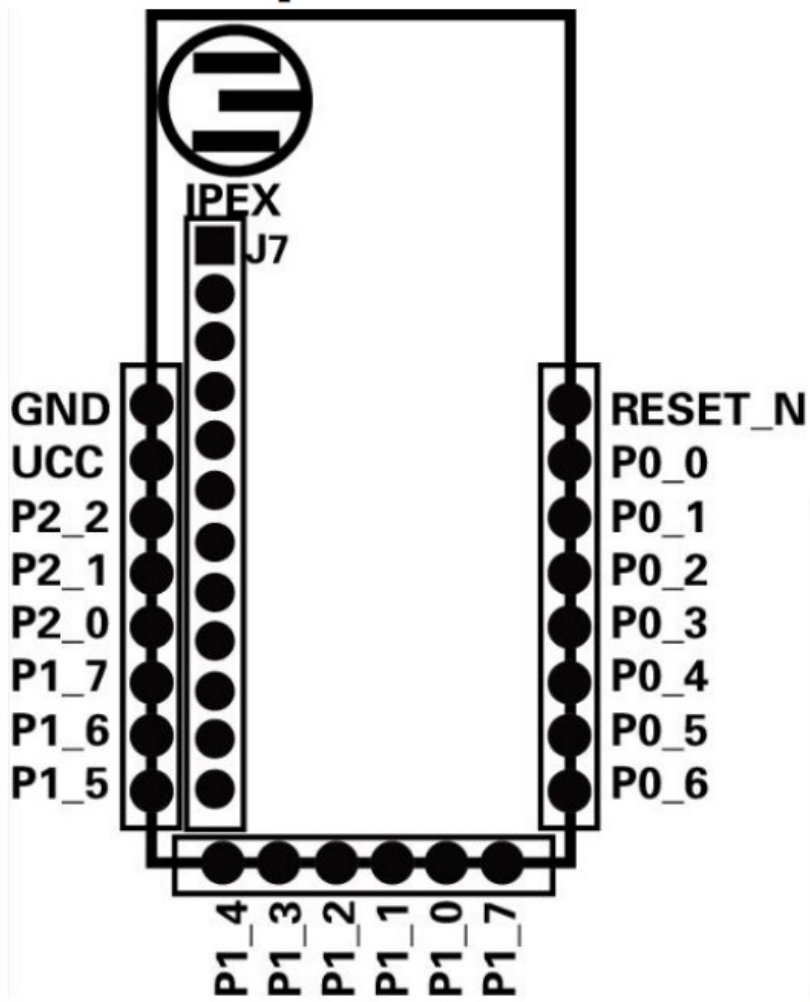

Pin name	Pin type	Description
P0_0	Digital I/O	Port0.0
P0_1	Digital I/O	Port0.1
P0_2	Digital I/O	Port0.2 – UART RX
P0_3	Digital I/O	Port0.3 – UART TX
P0_4	Digital I/O	Port0.4
P0_5	Digital I/O	Port0.5
P0_6	Digital I/O	Port0.6
P0_7	Digital I/O	Port0.7
P1_0	Digital I/O	Port1.0 – 20-mA drive capability
P1_1	Digital I/O	Port1.1 – 20-mA drive capability
P1_2	Digital I/O	Port1.2
P1_3	Digital I/O	Port1.3
P1_4	Digital I/O	Port1.4
P1_5	Digital I/O	Port1.5
P1_6	Digital I/O	Port1.6
P1_7	Digital I/O	Port1.7
P2_0	Digital I/O	Port2.0
P2_1	Digital I/O	Port2.1

P2_2	Digital I/O	Port2.2
VCC	Power	2-V–3.6-V digital power-supply connection
GND	Ground	Connect to GND
RESET_N	Digital input	Reset, active-low

Package Size

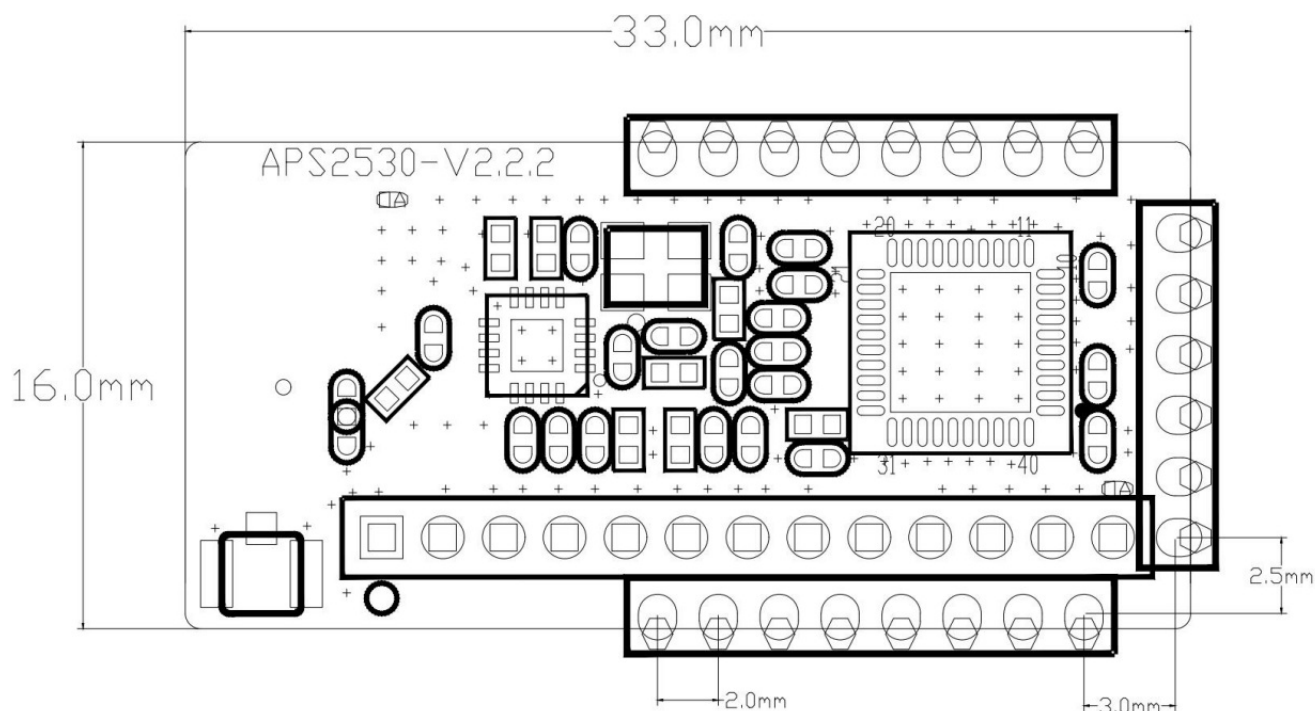

Warning

FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

FCC Label Instructions

If using a permanently affixed label, the modular transmitter must be labeled with its own FCC identification number, and, if the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following:

“Contains FCC ID: 2AFGR-APS2530X”.

Any similar wording that expresses the same meaning may be used. The Grantee may either provide such a label, an example of which must be included in the application for equipment authorization, or, must provide adequate instructions along with the module which explains this requirement. ISED RSS Warning/ISED RF Exposure

Statement ISED RSS Warning:

This device complies with the Innovation, Science and Economic Development Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. this device may not cause interference, and
2. this device must accept any interference, including interference that may cause undesired operation of the device.

ISED RF exposure statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20cm between the radiator& your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Le rayonnement de la classe b respecte ISED fixaient un environnement non

OEM Guidance

- Applicable FCC rules This device complies with part 15.247 of the FCC Rules.
- The specific operational use conditions This module can be used in IoT devices. The input voltage to the module is nominally 3.3 V DC. The operational ambient temperature of the module is -40 °C ~ 85 °C. the external antenna is allowed, such as a monopole antenna.
- Limited module procedures N/A
- Trace antenna designs N/A

RF exposure considerations

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. If the equipment is built into a host as a portable usage, an additional RF exposure evaluation may be required as specified by 2.1093.

Antennas

Antenna type: monopole antenna; Peak antenna gain : 3.26dBi

Label and compliance information

An exterior label on OEM's end product can use wording such as the following: "Contains Transmitter Module FCC ID: 2AFGR-APS2530X" or "Contains FCC ID: 2AFGR-APS2530X"


Information on test modes and additional testing requirements

The modular transmitter has been fully tested by the module grantee on the required number of channels, modulation types, and modes, it should not be necessary for the host installer to re-test all the available transmitter modes or settings. It is recommended that the host product manufacturer, installing the modular transmitter, perform some investigative measurements to confirm that the resulting composite system does not exceed the spurious emissions limits or band edge limits (e.g., where a different antenna may be causing additional emissions). The testing should check for emissions that may occur due to the intermixing of emissions with the other transmitters, digital circuitry, or due to the physical properties of the host product (enclosure). This investigation is especially important when integrating multiple modular transmitters where the certification is based on testing each of them in a stand-alone configuration. It is important to note that host product manufacturers should not assume that because the modular transmitter is certified they do not have any responsibility for final product compliance. If the investigation indicates a compliance concern the host product manufacturer is obligated to mitigate the issue. Host products using a modular transmitter are subject to all the applicable individual technical rules as well as to the general conditions of operation in Sections 15.5, 15.15, and 15.29 to not cause interference. The operator of the host product will be obligated to stop operating the device until the interference have been corrected. The final host/module combination need to be evaluated against the FCC Part 15B criteria for unintentional radiators in order to be properly authorized for operation as a Part 15 digital device.

Additional testing, Part 15 Subpart B disclaimer

The host integrator installing this module into their product must ensure that the final composite product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter operation and should refer to guidance in KDB 996369. For host products with certified modular transmitters, the frequency range of investigation of the composite system is specified by rule in Sections 15.33(a)(1) through (a) (3), or the range applicable to the digital device, as shown in Section 15.33(b)(1), whichever is the higher frequency range of investigation. When testing the host product, all the transmitters must be operating. The transmitters can be enabled by using publicly-available drivers and turned on, so the transmitters are active. In certain conditions it might be appropriate to use a technology-specific call box (test set) where accessory 50 devices or drivers are not available. When testing for emissions from the unintentional radiator, the transmitter shall be placed in the receive mode or idle mode, if possible. If receive mode only is not possible then, the radio shall be passive (preferred) and/ or active scanning. In these cases, this would need to enable activity on the communication BUS (i.e., PCIe, SDIO, USB) to ensure the unintentional radiator circuitry is enabled. Testing laboratories may need to add attenuation or filters depending on the signal strength of any active beacons (if applicable) from the enabled radio(s). See ANSI C63.4, ANSI C63.10 and ANSI C63.26 for further general testing details. The product under test is set into a link/association with a partnering device, as per the normal intended use of the product. To ease testing, the product under test is set to transmit at a high-duty cycle, such as by sending a file or streaming some media content.

Documents / Resources

	<p>Apsystem APS2530X ZigBee PRO Protocol [pdf] User Manual APS2530X, 2AFGR-APS2530X, 2AFGRAPS2530X, APS2530X ZigBee PRO Protocol, APS2530X Protocol, ZigBee PRO Protocol, ZigBee Protocol, PRO Protocol, Protocol, ZigBee</p>
---	---

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.