



## ARTECK HW192 Wireless Keyboard User Manual

[Home](#) » [ARTECK](#) » ARTECK HW192 Wireless Keyboard User Manual 

ARTECK HW192 Wireless Keyboard User Manual





## **Contents**

- [1 Welcome](#)
- [2 Product Specifications](#)
- [3 Package Contents:](#)
- [4 Getting Started Guide](#)
- [5 Charge the Battery](#)
- [6 Function Keys](#)
- [7 Fn Lock Key](#)
- [8 Battery Meter](#)
- [9 Steps of Pairing the Keyboard with Your Computer](#)
- [10 Troubleshooting](#)
- [11 Caution:](#)
- [12 Energy-saving Sleep Mode](#)
- [13 Safety Caution](#)
- [14 Disposal of Waste Batteries](#)
- [15 IC Caution](#)
- [16 Warranty](#)
- [17 Contact Us](#)
- [18 Documents / Resources](#)
  - [18.1 References](#)
- [19 Related Posts](#)

## **Welcome**

Thank you for choosing this Artek HW192 wireless keyboard. To ensure optimum performance and safety, please read these instructions carefully before operating this product. It is strongly recommended you keep the manual for future reference.

## **Product Specifications**



Wireless Specification	2.4G USB Wireless
Operating Range	Up to 10 Meters
Moldulating System	GFSK
Operating Voltage	3.0-4.2V
Operating Current	2mA
Standby Current	0.3-0.5mA
Sleeping Current	10uA
Charging Current	200uA
Standby Time	1000 days
Charging Time	2 hours
Input Voltage	5V
Uninterrupted Working Time	250 hours
Lithium Battery Style	Rechargeable
Lithium Battery Specification	3.8*20*35mm
Key Strength	50-80g
Key Life	3 million strokes
Operating Temperature	-10 – 50°C

## Package Contents:

Arteck HW192 Wireless Keyboard \*1  
 USB nano 2.4G receiver  
 USB-C charging cable \*1  
 User manual \*1

## Getting Started Guide

### 1. Product Overview





1. Keyboard ON/OFF Slide Switch.
2. Power Indicator: Lights up green for about 3 sec when being turned on. When you press the power meter key, the power indicator will be flashing for the power meter.
3. CAPS Lock Indicator: Green light on when CAPS on.
4. Number Lock Indicator: Green light on when Number lock on.
5. Fn Lock Indicator: Blue light on when Fn lock on.
6. Charging Indicator: Red light will turn on when the keyboard is charging and turns green once fully charged.
7. USB-C Charging Port: Used for charging the keyboard.

## Charge the Battery

Turn on the Wireless keyboard.



















The power indicator light will illuminate green.

If the power indicator light keep blinking, it means the battery is low, you need to charge the keyboard with below steps:

1. Plug the USB-C charging cable into the keyboard.
2. Plug the USB plug on a computer or USB power adaptor.
3. The charging indicator will be red. Charge for 3-5 hours, or until the charging indicator become green.


## Function Keys



	Mute		Volume down		Volume up
	Previous Track		Play / Pause		Next Track
	Brightness down		Brightness up		Media Player
	Switch Windows		Mail		Web Browser
	Fn Lock		Print Screen		Calculator
	My Computer		Battery Meter		Search

## Fn Lock Key

The default function of the F1-F12 will be F1-F12 function.

If you press the , the Fn indicator will be on. Then the function will change to the above table functions.

## Battery Meter

Press the battery meter key, the power indicator will flash.

Flashing 4 times means the battery is full charged,  
flashing 3 times means the power is around 75% remaining,  
flashing 2 times means the power is around 50% remaining,  
flashing 1 time means the power is around 25% remaining.

## Steps of Pairing the Keyboard with Your Computer

**Step 1:** Turn on the OFF/ON switch of the keyboard.

**Step 2:** Insert the USB receiver to the port of your computer. It will pair to the keyboard automatically. You are able to type the keyboard right now.

**Notice:** If you are not able to connect the keyboard to your computer, please kindly change to another USB port and make sure that the USB receiver plug to the end of the USB port.

If above doesn't solve, please kindly contact with [support@arteck.com](mailto:support@arteck.com) for assistance. We will solve your issue with 100% satisfactory solution.

## Troubleshooting

1. Make sure the keyboard is on (slide switch in "ON" position).



2. Make sure the keyboard is in operating distance (within 10 meters).
3. Ensure the battery storage has power.
4. Make sure the USB receiver is plugged to the end of USB port.

### **Caution:**

1. When not in use for a prolonged period, it is recommended that you turn off the keyboard to lengthen battery life.
2. When the power status light flash, it is recommended that charging the keyboard not less than 2 hours.

### **Energy-saving Sleep Mode**

Keyboard's long life battery lasts for several months of normal use. The keyboard will go into sleep mode if left on and not being used; press any key and wait a second or two to bring it out of sleep mode.

### **Safety Caution**

1. Keep the item away from sharp objects.
2. Do not place heavy object on the keyboard.
3. Away from microwave items.
4. Do not force or distorted the keyboard.
5. Keep away from oil, chemical or other organic liquid.

### **Disposal of Waste Batteries**

1. Insert screwdriver between plastic top and metal case at keyboard top or bottom and Pry up plastic top and remove it completely. This action destroys keyboard separate battery from circuit board, it is your responsible to hand this over to an applicable collection and recycling will help to conserve natural resources and prevent potential negative consequences for human health and the environment due to the possible presence of hazardous in batteries and electrical and electronic equipment.

### **IC Caution**

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.


### **Warranty**

Our company provides customers with a warranty of 24 months from the date of purchase.


### **Contact Us**



For any inquires or comments concerning our products, please send an email to [support@arteck.com](mailto:support@arteck.com), and we will respond to you as soon as possible. If there is any quality-related issue with the product, you may request a replacement or refund by submitting a request to [support@arteck.com](mailto:support@arteck.com).

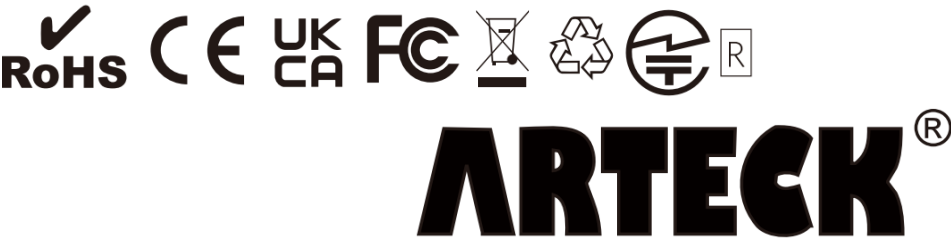

Documents / Resources

	<a href="#">ARTECK HW192 Wireless Keyboard</a> [pdf] User Manual HW192 Wireless Keyboard, HW192, Wireless Keyboard, Keyboard, Keyboard HW192
---	---

References

- [User Manual](#)