




ARTEN JPL-UP120V-8WDIP-D Core and Deka Panel Light User Guide

[Home](#) » [ARTEN](#) » ARTEN JPL-UP120V-8WDIP-D Core and Deka Panel Light User Guide 

ARTEN CORE & DEKA PANEL LIGHT USER GUIDE

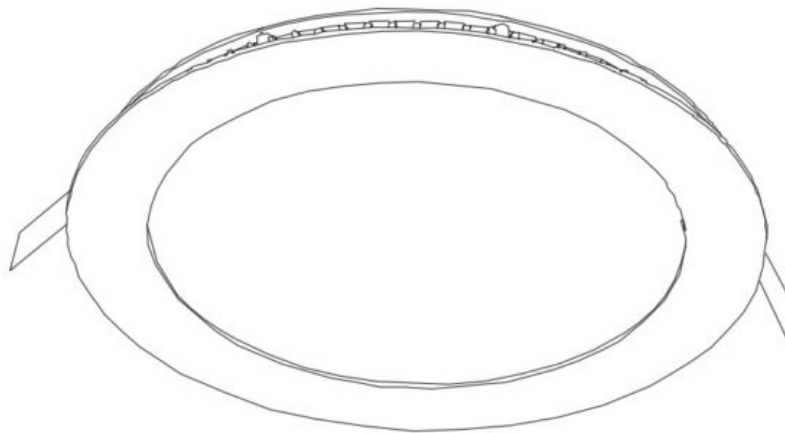

Contents

- [1 IMPORTANT SAFETY INSTRUCTIONS](#)
- [2 INSTALLATION](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)


IMPORTANT SAFETY INSTRUCTIONS

Basic safety precautions should always be followed when installing, including the following:

1. Read all instructions.
2. Licensed electrician for installation only.

3. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or adjustment to the fitting.
4. Do not install any luminaire near the heat source.
5. Do not exceed the nominal supply voltage or amperage ratings.
6. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting power.

For color changeable model (controlled by slide switch in lamp) please select light color before installation, see picture.




This product contains a light source of energy efficiency class E.

NOTE: Before installation, please check the information of drivers as below.


Non-dim tai ON/OFF	Can not be used with any dimmer.
Triac dim	Compliable with recommended TRIAC dimmers.
DALI / Push	Work with DALI dimming system or push dim system.

NOTE: Before Installation, please check the IP label on the luminaire to choose right place to install.


IP20	Indoor use only, do not use in wet or damp place.
IP44	Indoor use only, use in wet or damp place.

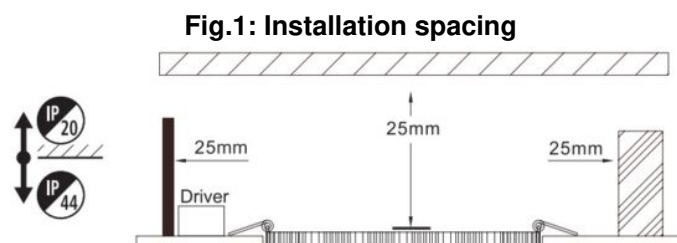


INSTALLATION

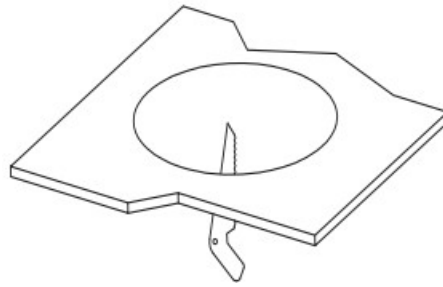


1. Open a hole according to the cutout size of downlight.

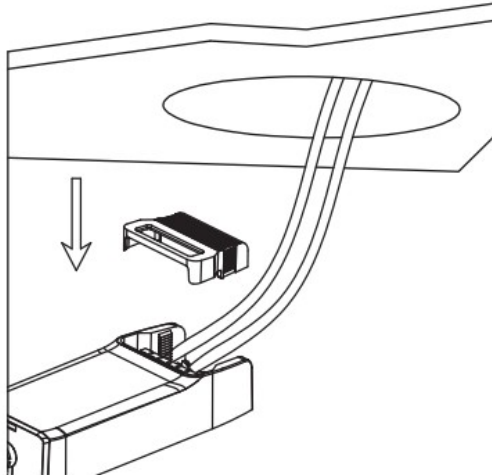



 L = ruskea
 N = sininen

2. Use screw-driver to open the driver terminal cover, feed the main AC wire in terminal block respectively, then fix the cover back.

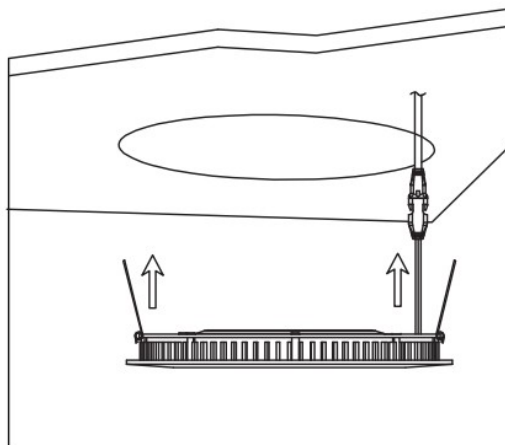

3. Connect the LED downlight with driver, hold back the spring clip, then push the LED downlight into the hole.
4. Make sure the LED downlight fixed tightly in ceiling, turn on the power.

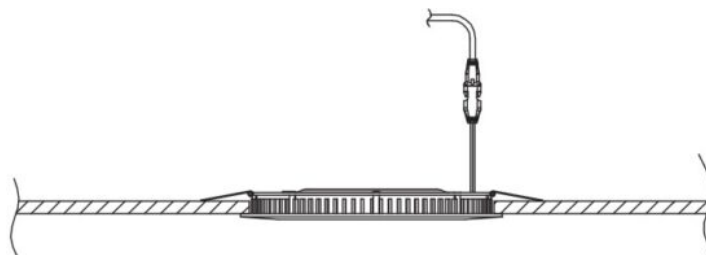

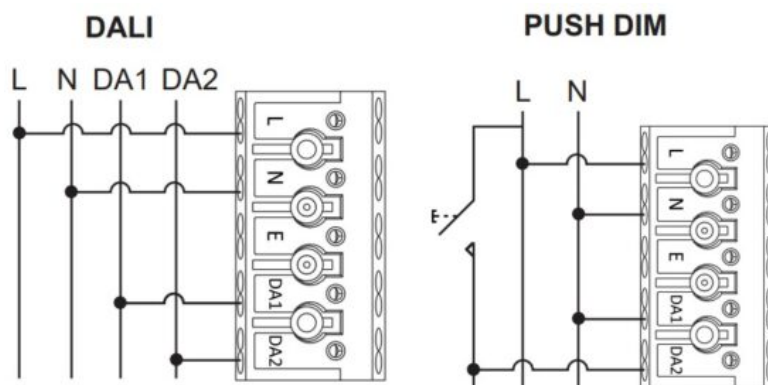

Synchronisation of PUSH DIM drivers:

Press and hold the button until all lights are ON. The press should be >15 seconds. Then switch all lights OFF with a short press. This will bring all lights back into synchronisation again.

Round CORE ON/OFF downlights

ON/OFF

Code	Product name	Diameter	Cutout	Electrical Number
JPL-UP120V-8WDIP	CORE ON/OFF 8W valkoinen	Ø120	Ø108-113	4123204
JPL-UP170V-12WDIP	CORE ON/OFF 12W valkoinen	Ø170	Ø157-163	4236704

Round CORE DIM downlights

TRIAC DIM

Code	Product name	Diameter	Cutout	Electrical number
JPL-UP120V-8WDIP-D	CORE DIM 8W valkoinen	Ø120	Ø108-113	4123204
JPL-UP120H-8WDIP-D	CORE DIM 8W harmaa	Ø120	Ø108-113	4236704
JPL-UP120M-8WDIP-D	CORE DIM 8W musta	Ø120	Ø108-113	4236705
JPL-UP170V-12WDIP-D	CORE DIM 12W valkoinen	Ø170	Ø157-163	4123200
JPL-UP170H-12WDIP-D	CORE DIM 12W harmaa	Ø170	Ø157-163	4236706
JPL-UP170M-12WDIP-D	CORE DIM 12W musta	Ø170	Ø157-163	4236707
JPL-UP224V-18WDIP-D	CORE DIM 18W valkoinen	Ø224	Ø205-215	4123232
JPL-UP224M-18WDIP-D	CORE DIM 18W musta	Ø224	Ø205-215	4236772

Square DEKA downlights

TRIAC DIM

Code	Product name	Size	Cutout	Electrical number
JPL-UPN120V-10WDIP	DEKA 10W white	120*120	108*113 square	4236724
JPL-UPN170V-12WDIP	DEKA 12W white	170*170	160*165 square	4236725
JPL-UPN170M-12WDIP	DEKA 12W black	170*170	160*165 square	4236726

DALI/PUSH CORE downlights

Code	Product name	Diameter	Cutout	Electrical number
JPL-UP120V-8WDIP-DALI	CORE 8W valkoinen DALI/PUSH	Ø120	Ø108-113	4246563
JPL-UP120H-8WDIP-DALI	CORE 8W harmaa DALI/PUSH	Ø120	Ø108-113	4246561
JPL-UP120M-8WDIP-DALI	CORE 8W musta DALI/PUSH	Ø120	Ø108-113	4246562
JPL-UP170V-12WDIP-DALI	CORE 12W valkoinen DALI/PUSH	Ø170	Ø157-163	4246552
JPL-UP170H-12WDIP-DALI	CORE 12W harmaa DALI/PUSH	Ø170	Ø157-163	4246553
JPL-UP170M-12WDIP-DALI	CORE 12W musta DALI/PUSH	Ø170	Ø157-163	4246554
JPL-UP224V-18WDIP-DALI	CORE 18W valkoinen DALI/PUSH	Ø224	Ø205-215	4246564
JPL-UP224M-18WDIP-DALI	CORE 18W musta DALI/PUSH	Ø224	Ø205-215	4246565

DALI/PUSH DEKA downlights

Code	Product name	Size	Cutout	Electrical number
JPL-UPN120V-10WDIP-DALI	DEKA 10W valkoinen DALI	120*120	108*113 square	4246551
JPL-UPN170V-12WDIP-DALI	DEKA 12W valkoinen DALI	170*170	160*165 square	4246566
JPL-UPN170M-12WDIP-DALI	DEKA 12W musta DALI	170*170	160*165 square	4246567

ARTEN

Documents / Resources

	ARTEN JPL-UP120V-8WDIP-D Core and Deka Panel Light [pdf] User Guide JPL-UP170V-12WDIP-D, JPL-UP224V-18WDIP-D, JPL-UP120V-8WDIP-D Core and Deka Panel Light, JPL-UP120V-8WDIP-D, Core and Deka Panel Light, Deka Panel Light, Panel Light, Light
---	--

References

- [Arten Oy - Valaisimet ammattiasiakkaille](#)
- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.