

Behringer SU9920

Behringer Sonic Ultramizer SU9920 Ultimate Stereo Sound Enhancement Processor User Manual

Model: SU9920

[Introduction](#) [Safety](#) [Instructions](#) [Features](#) [Controls & Connectors](#) [Setup](#) [Operation](#)
[Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

1. INTRODUCTION

The Behringer Sonic Ultramizer SU9920 is a stereo sound enhancement processor designed to improve the clarity, presence, and depth of audio signals. It achieves this by dynamically processing the low and high frequencies, making sound systems more impactful without requiring additional speakers or amplifiers. This manual provides detailed instructions for the proper installation, operation, and maintenance of your SU9920.



Image 1: Angled view of the Behringer Sonic Ultramizer SU9920, showcasing its rack-mountable design and front panel controls.

2. IMPORTANT SAFETY INSTRUCTIONS

- Read these instructions thoroughly before operating the unit.
- Keep these instructions for future reference.
- Heed all warnings on the appliance and in the operating instructions.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third

prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

- Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

3. KEY FEATURES

The Behringer Sonic Ultramizer SU9920 offers the following key features:

- Stereo Sound Enhancement Process with Dedicated Low Contour Process Controls.
- TRS and XLR Input/Output (I/O) connectors for versatile connectivity.
- Enhances voice intelligibility and music presence in various audio applications.
- Improves the performance of sound systems by adding sparkling high-end and tight bass without requiring additional speakers or amplifiers.

4. CONTROLS AND CONNECTORS

4.1 Front Panel

The front panel of the SU9920 provides all the necessary controls for sound enhancement and monitoring.



Image 2: Front panel of the Behringer Sonic Ultramizer SU9920. This view shows the controls for Channel 1 and Channel 2, including Process and Low Contour knobs, Clip indicators, and the In/Out bypass button.

1. **CHANNEL 1 / CHANNEL 2:** These sections contain the controls for each stereo channel.
2. **PROCESS Knob:** Adjusts the amount of high-frequency enhancement for the respective channel. Turning clockwise increases the effect.
3. **LOW CONTOUR Knob:** Controls the amount of low-frequency enhancement and definition for the respective channel. Turning clockwise increases the effect.
4. **CLIP LEDs:** Indicate when the input or output signal is clipping, suggesting the signal level is too high and may cause distortion. Adjust input levels to prevent clipping.
5. **IN/OUT Button:** Activates or bypasses the sound enhancement processing. When illuminated, the processing is active.
6. **POWER Switch:** Turns the unit on or off.

4.2 Rear Panel

The rear panel houses all the audio input and output connections, as well as the power input.



Image 3: Rear panel of the Behringer Sonic Ultramizer SU9920. This view displays the AC power inlet, and the balanced XLR and 1/4" TRS input and output connectors for both channels.

1. **AC IN:** Standard IEC power connector for connecting the included power cable.
2. **INPUTS 1 & 2 (XLR & TRS):** Balanced XLR and 1/4" TRS input connectors for connecting audio sources. Use either XLR or TRS for each channel, not both simultaneously.
3. **OUTPUTS 1 & 2 (XLR & TRS):** Balanced XLR and 1/4" TRS output connectors for sending the processed audio signal to other equipment, such as an amplifier or mixer. Use either XLR or TRS for each channel, not both simultaneously.

5. SETUP

Proper setup ensures optimal performance and prevents damage to your equipment.

1. **Unpacking:** Carefully unpack the SU9920 and inspect it for any signs of damage during transit. Retain the original packaging for future shipping or storage.
2. **Placement:** Install the unit in a standard 19-inch rack if desired, ensuring adequate ventilation around the chassis. Avoid placing it near heat sources or in direct sunlight.
3. **Power Connection:** Connect the supplied AC power cable to the AC IN socket on the rear panel and then to a suitable power outlet. Ensure the POWER switch on the front panel is in the OFF position before connecting.
4. **Audio Connections:**
 - Connect your audio source (e.g., mixer output) to the INPUTS 1 and 2 on the rear panel using balanced XLR or 1/4" TRS cables.
 - Connect the OUTPUTS 1 and 2 to the inputs of your next audio device (e.g., amplifier, recording interface) using balanced XLR or 1/4" TRS cables.
 - Ensure all connections are secure and correctly phased.
5. **Initial Settings:** Before powering on, set both PROCESS and LOW CONTOUR knobs to their minimum (fully counter-clockwise) positions. Ensure the IN/OUT button is disengaged (processing bypassed).

6. OPERATION

Follow these steps to operate your Sonic Ultramizer SU9920:

1. **Power On:** After all connections are made and initial settings are configured, press the POWER switch on the front panel to turn on the unit.
2. **Signal Check:** Play an audio signal through your system. Ensure that audio is passing through the SU9920 even with the processing bypassed.
3. **Engage Processing:** Press the IN/OUT button to engage the sound enhancement processing. The button will illuminate.
4. **Adjust PROCESS:** Slowly turn the PROCESS knob clockwise for Channel 1 and/or Channel 2. Listen for increased clarity and presence in the high frequencies. Adjust to taste, avoiding excessive brightness or harshness.
5. **Adjust LOW CONTOUR:** Slowly turn the LOW CONTOUR knob clockwise for Channel 1 and/or Channel 2. Listen for enhanced bass definition and impact. Adjust to taste, avoiding muddiness or overwhelming bass.
6. **Monitor CLIP LEDs:** Continuously monitor the CLIP LEDs. If they illuminate frequently or stay lit, reduce the input level to the SU9920 or the PROCESS/LOW CONTOUR settings to prevent distortion.
7. **A/B Comparison:** Use the IN/OUT button to quickly bypass and re-engage the processing to compare the enhanced sound with the original signal. This helps in fine-tuning the settings.
8. **Power Off:** When finished, press the POWER switch to turn off the unit.

7. MAINTENANCE

The Behringer Sonic Ultramizer SU9920 requires minimal maintenance to ensure long-term reliability.

- **Cleaning:** Clean the unit regularly with a soft, dry cloth. Do not use liquid cleaners or solvents, as they may damage the finish or internal components.
- **Ventilation:** Ensure that the ventilation openings are not obstructed. Dust accumulation can lead to overheating.
- **Storage:** If storing the unit for an extended period, disconnect it from power and store it in a dry, dust-free environment, preferably in its original packaging.
- **Servicing:** All servicing should be performed by qualified service personnel. Do not attempt to open the unit or perform repairs yourself.

8. TROUBLESHOOTING

This section addresses common issues you might encounter with your SU9920.

Problem	Possible Cause	Solution
No power	Power cable disconnected; power outlet faulty; unit fuse blown.	Check power cable connection. Try a different power outlet. If fuse is suspected, contact qualified service personnel.
No sound	Incorrect audio connections; cables faulty; IN/OUT button disengaged; source device not sending signal.	Verify all audio cables are correctly connected to INPUTS and OUTPUTS. Test cables. Ensure IN/OUT button is illuminated. Check audio source.
Distorted sound / CLIP LED constantly lit	Input signal too high; PROCESS/LOW CONTOUR settings too high.	Reduce the output level from your audio source. Decrease the PROCESS and LOW CONTOUR knob settings.
Sound is too bright or harsh	PROCESS knob set too high.	Reduce the PROCESS knob setting.
Bass is muddy or overwhelming	LOW CONTOUR knob set too high.	Reduce the LOW CONTOUR knob setting.

9. SPECIFICATIONS

Technical specifications for the Behringer Sonic Ultramizer SU9920:





- **Model:** SU9920
- **Item Weight:** 4.85 pounds (2.2 kg)
- **Product Dimensions:** 19.02 x 1.75 x 8.54 inches (483 x 44.5 x 217 mm)
- **Color:** Black
- **Inputs:** Balanced XLR and 1/4" TRS
- **Outputs:** Balanced XLR and 1/4" TRS
- **Power:** Standard AC input
- **Enhancement Type:** Stereo Sound Enhancement Processor with Low Contour Control



10. WARRANTY AND SUPPORT

For detailed warranty information and technical support, please refer to the official Behringer website or contact their customer service department. Keep your purchase receipt as proof of purchase for any warranty claims.

Behringer Official Website: www.behringer.com

Related Documents - SU9920

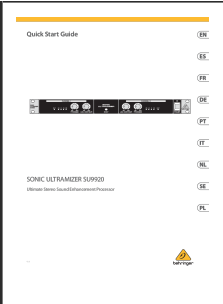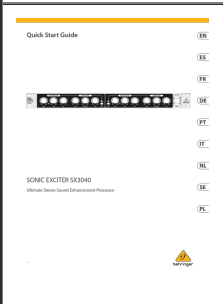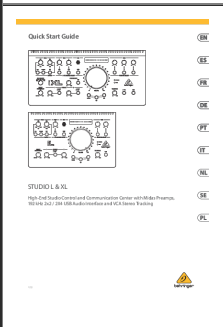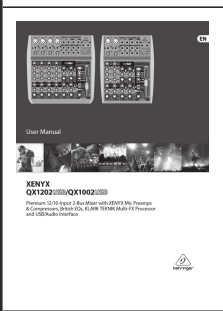	Behringer SONIC ULTRAMIZER SU9920 Quick Start Guide A concise and informative quick start guide for the Behringer SONIC ULTRAMIZER SU9920 Ultimate Stereo Sound Enhancement Processor, covering setup, controls, and important safety information in multiple languages.
	Behringer Sonic Exciter SX3040 Quick Start Guide A quick start guide for the Behringer Sonic Exciter SX3040, an ultimate stereo sound enhancement processor. This document provides safety instructions, product overview, and control descriptions in multiple languages.
	Behringer STUDIO L & XL Quick Start Guide Get started quickly with the Behringer STUDIO L & XL, a high-end studio control and communication center featuring Midas Preamps, a 192 kHz 2x2 / 2X4 USB audio interface, and VCA stereo tracking. This guide provides essential setup and operational information.
	Behringer XENYX QX1202USB/QX1002USB User Manual: Premium Mixing Console Features and Operation Comprehensive user manual for the Behringer XENYX QX1202USB and QX1002USB premium mixing consoles. Learn about features like XENYX Mic Preamps, British EQs, KLARK TEKNIK Multi-FX, and USB/Audio Interface capabilities for studio and live sound applications.

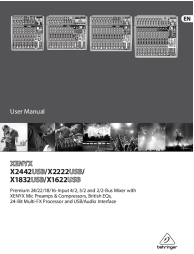	BEHRINGER XENYX X2442USB/X2222USB/X1832USB/X1622USB Premium Mixers User Manual Comprehensive user manual for BEHRINGER XENYX premium mixers, detailing features like XENYX Mic Preamps, British EQs, Digital Effects Processor, USB/Audio Interface, and installation guides.
	Behringer XENYX 1002FX/1202FX User Manual Comprehensive user manual for the Behringer XENYX 1002FX and 1202FX compact mixing consoles, detailing features, controls, applications, installation, specifications, and warranty information.

Documents - Behringer – SU9920



[\[pdf\]](#) Quick Start Guide Guide Warranty

Quick Start Guide Chinese Sound Enhancers Behringer SU9920 Bộ nâng tiếng QSG BE P0487 CN
mediadl musictribe media PLM data docs |||

SONIC ULTRAMIZER **SU9920** Ultimate Stereo Sound Enhancement Processor V 1.0
2 SONIC ULTRAMIZER **SU9920** , TS , , , , , , , 1. 2. 3. 4. 5. 6. 7. 8. , , 9. , 10. , , 11. 12.
, , , , , 13. , 14. , , , , 15. ...


lang:es score:44 filesize: 1.08 M page_count: 5 document date: 2021-10-22



[Behringer SONIC ULTRAMIZER SU9920 Quick Start Guide](#)

A concise and informative quick start guide for the Behringer SONIC ULTRAMIZER SU9920 Ultimate Stereo Sound Enhancement Processor, covering setup, controls, and important safety information in multiple languages.

lang:en score:43 filesize: 1.37 M page_count: 13 document date: 2021-10-22

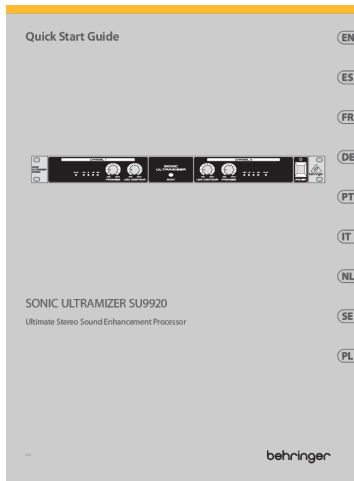


[\[pdf\]](#) Quick Start Guide Instructions Guide

Quick Start Guide SONIC ULTRAMIZER SU9920QSG BE 0834 AAI SU9920 WWcdn mediavalet aunsw musictribe cEmeWZ4XskGvXssFjgDGzw vXZL2q6wz0iUoAZN0R BIQ Original QSG WW |||

Quick Start Guide SONIC ULTRAMIZER **SU9920** Ultimate Stereo Sound Enhancement Processor V 6.0 2 SONIC ULTRAMIZER **SU9920** Important Safety Instructions Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality profes...

lang:en score:39 filesize: 1.28 M page_count: 13 document date: 2023-08-18

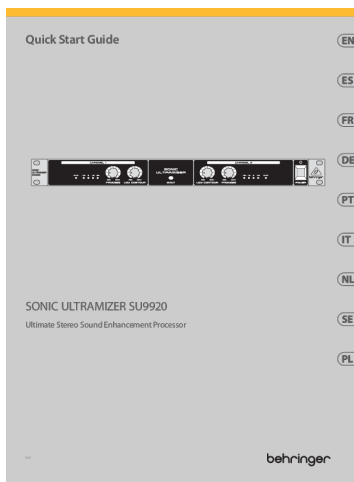

[\[pdf\]](#) Quick Start Guide Instructions Guide

Quick Start Guide SONIC ULTRAMIZER SU9920 Music Tribemediadl musictribe â° data docs QSG BE 0834 AAI WW mediadl media PLM P0487 |||

Quick Start Guide SONIC ULTRAMIZER **SU9920** Ultimate Stereo Sound Enhancement Processor V 6.0 2 SONIC ULTRAMIZER **SU9920** Important Safety Instructions Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality profes...

lang:en score:39 filesize: 1.28 M page_count: 13 document date: 2023-08-18




[\[pdf\]](#) Quick Start Guide Guide Warranty

Quick Start Guide Japanese Sound Enhancers Behringer SU9920 Bộ nâng tiếng QSG BE P0487 JP mediadl musictribe media PLM data docs |||

SONIC ULTRAMIZER **SU9920** Ultimate Stereo Sound Enhancement Processor V 1.0 2 SONIC ULTRAMIZER **SU9920** . TS 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 45...

lang:fr score:38 filesize: 1.12 M page_count: 5 document date: 2021-10-22

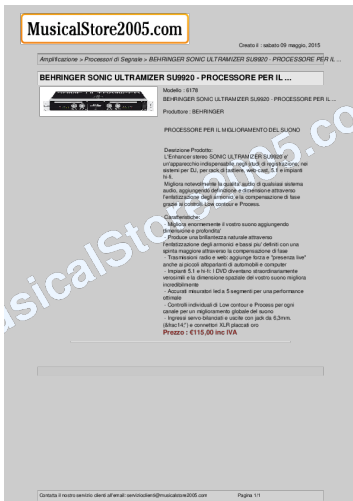

[pdf] Datasheet

BEHRINGER SONIC ULTRAMIZER SU9920 PROCESSORE PER IL Scheda Prodotto MusicalStore2005

behringer sonic ultramizer su9920 processore per il l4 musicalstore2005 datasheet products id 6178

Creato il : sabato 09 maggio, 2015 Amplificazione Processori di Segnale


BEHRINGER SONIC ULTRAMIZER **SU9920** - PROCESSORE PER IL ...

BEHRINGER SONIC ULTRAMIZER **SU9920** - PROCESSORE PER IL ... Modello :

6178 BEHRINGER SONIC ULTRAMIZER **SU9920** - PROCESSORE PER IL ...

usicalStore2005.co Produttore : BEH...

lang:it score:35 filesize: 62.89 K page_count: 1 document date: 2015-05-09

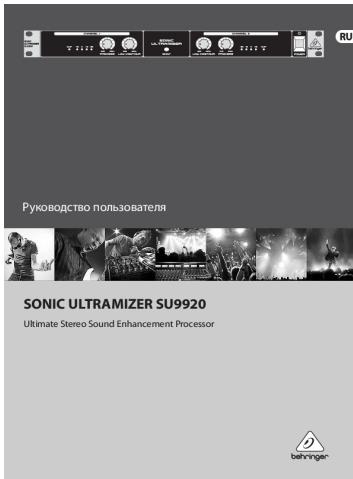

[pdf]

SONIC ULTRAMIZER SU9920 BEHRINGER Купить энхансера недорого отзывы фотографии

характеристики низкие цены в интернет магазине БигТВ с доставкой по городу Москва 672405 1


1651477207 bigtv ru storage goodsDocuments 672 |||

SONIC ULTRAMIZER **SU9920** Ultimate Stereo Sound Enhancement Processor 2

SONIC ULTRAMIZER **SU9920** 2

..... 3 3 1.

lang:de score:31 filesize: 2.38 M page_count: 10 document date: 2013-04-08

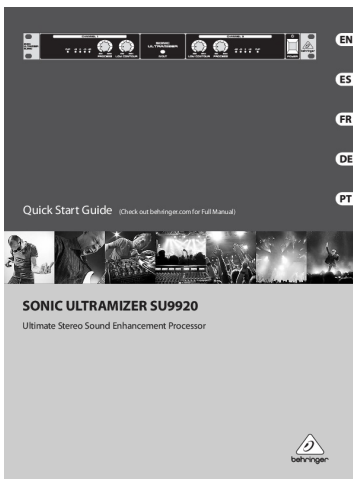

[pdf] Quick Start Guide Guide

SONIC ULTRAMIZER SU9920 BEHRINGER Behringer Quick Start Guide 7069394 archive org

manualzilla id

...

lang:de score:29 filesize: 1.34 M page_count: 10 document date: 2013-04-25



[pdf]

FEEL Prod Grap PH Artwork P0487 SU9920 PID 2016 03 31 Rev 1 indd mark vicente 8849685282846

mediadl musictribe media sys master h5e h91

Product Information Document Enhancers/Exciters SONIC ULTRAMIZER **SU9920**

Ultimate Stereo Sound Enhancement Processor # Dramatically improves your sound

by adding clarity, dimension and depth # Produces natural brightness through

harmonic enhancement and tighter bass with increased punch through phas...

lang:en score:28 filesize: 4.21 M page_count: 6 document date: 2016-03-31



[pdf]

FEEL Prod Grap PH Artwork P0487 SU9920 PID 2016 03 31 Rev 1 indd mark vicente 7d6c9ede 6b90

4445 a2d3 1bbc468ae2d6files bbystatic MP8ZTD SDEclo2 90b6bWw 1bbc468ae2d6 |||


Product Information Document Enhancers/Exciters SONIC ULTRAMIZER **SU9920**

Ultimate Stereo Sound Enhancement Processor # Dramatically improves your sound

by adding clarity, dimension and depth # Produces natural brightness through

harmonic enhancement and tighter bass with increased punch through phas...

lang:en score:27 filesize: 4.21 M page_count: 6 document date: 2016-03-31

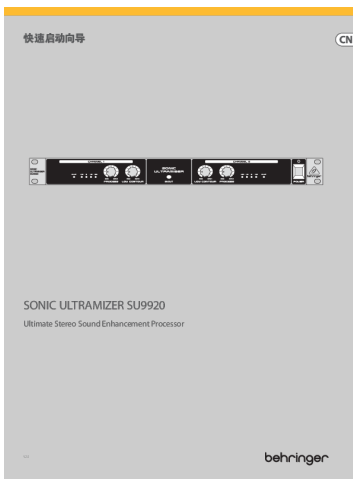

[pdf] Quick Start Guide Warranty

SONIC ULTRAMIZER SU9920 QSG BE 0834 AAI CN mediadl musictribe media PLM data docs P0487 |||

SONIC ULTRAMIZER **SU9920** Ultimate Stereo Sound Enhancement Processor V 2.0

2 SONIC ULTRAMIZER **SU9920** , TS , , , , , , , 1. 2. 3. 4. 5. 6. 7. 8. , , 9. , 10. , , 11. 12.

, , , , , 13. , 14. , , , , 15. ...

lang:es score:27 filesize: 1.01 M page_count: 5 document date: 2023-08-18




[\[pdf\]](#) User Manual Borchure Catalog

Download User Manual For Behringer DJ Equipment B215D BEHRINGER Catalog 2009 ccslightsound au brochures |||

V2 EN 09 Microphones, Wireless Systems and Headphones 08 Mixers and Powered Mixers 10 Loudspeakers ... Digital Effects Processors VIRTUALIZER PRO DSP2024P Sound Enhancement Processors SONIC ULTRAMIZER **SU9920** Crossovers and Loudspeaker Management SUPER-X PRO CX2310 Crossover SUPER-X PRO CX3400 t ...

lang:en **score:25** filesize: 10.24 M page_count: 0 document date: 0000-00-00

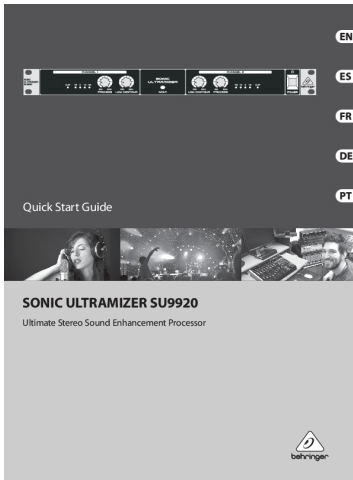


[\[pdf\]](#) Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0487 QSG WW A4 2017 01 13 Rev 3 indd SU9920 Index of media PLM data docs media63 music group |||

Quick start Guide SONIC ULTRamIzer **SU9920** ultimate stereo sound Enhancement Processor 2 SONIC ULTRAMIZER **SU9920** Important Safety Instructions Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality professional...

lang:en **score:25** filesize: 1.46 M page_count: 8 document date: 2017-02-09

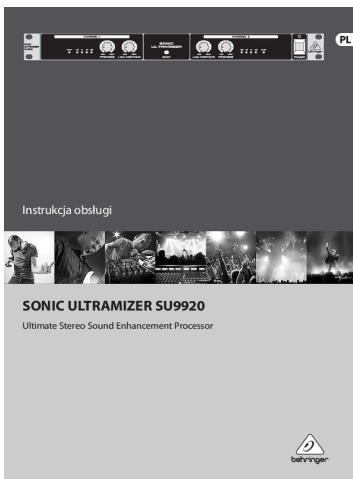


[\[pdf\]](#) User Manual

SONIC ULTRAMIZER SU9920 BEHRINGER Dziękuję Dziękujemy za zakup urządzenia Urządzenie to profesjonalny procesor sygnału polepszający obecność i wyrazistość su9920 p0487 m pl midimanuals manuals behringer user manual polish

...

lang:en **score:25** filesize: 2.09 M page_count: 10 document date: 2013-04-08

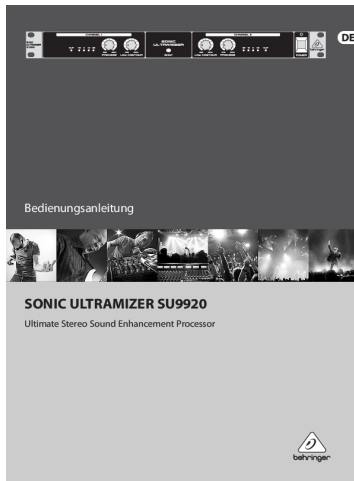


[\[pdf\]](#) User Manual

SONIC ULTRAMIZER SU9920 BEHRINGER Danke Vielen Dank für den Erwerb des Der ist ein professioneller Signalprozessor zur Verbesserung der Präsenz und su9920 p0487 m de midimanuals manuals behringer user manual german

...

lang:en score:24 filesize: 2.09 M page_count: 10 document date: 2013-04-08

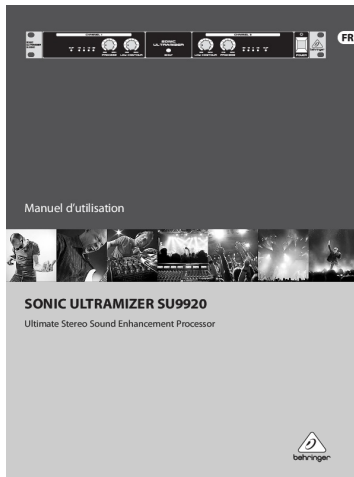


[\[pdf\]](#) User Manual

SONIC ULTRAMIZER SU9920 BEHRINGER Merci d avoir fait l acquisition du Le est un processeur professionnel conçu pour conférer brillance et vie su9920 p0487 m fr synthmanuals manuals behringer user manual french

...

lang:en score:23 filesize: 2.08 M page_count: 10 document date: 2013-04-08

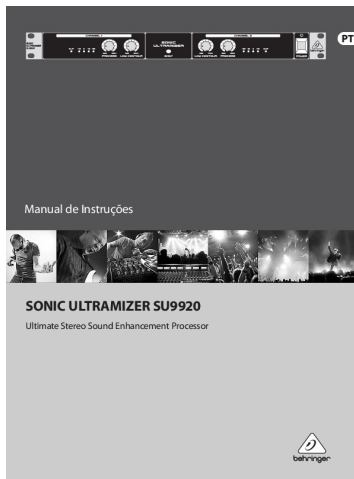


[\[pdf\]](#) User Manual

SONIC ULTRAMIZER SU9920 BEHRINGER Obrigado Muito obrigado por ter adquirido o O é um processador de sinal profissional para realçar a presença e vivacidade su9920 p0487 m pt synthmanuals manuals behringer user manual portuguese

...

lang:en score:23 filesize: 2.08 M page_count: 10 document date: 2013-04-08

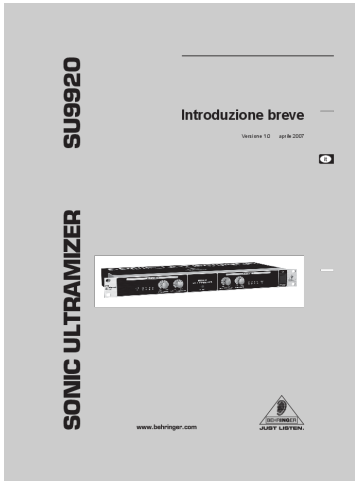


[pdf]

untitled Visualizza il Manuale in BEHRINGER SU9920 Sonic Ultramizer Strumenti Musicali net IT
strumentimusicali manuali |||

...

lang:en score:23 filesize: 3.6 M page_count: 8 document date: 2007-04-20

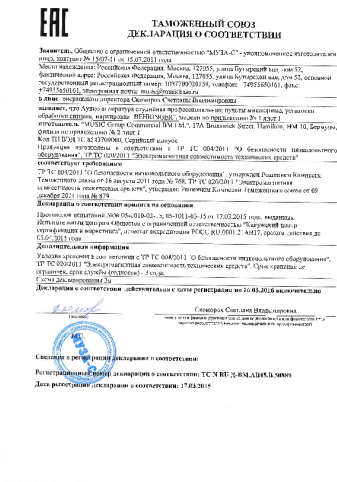


[pdf]

Behringer sound 16 03 2016 invask ru files sertif BEHRINGER

TAMO ITEHHBIR COIO3 AEKIAPAIIfi O CO OTBET CT BVrVr Saqnureru,
O6ulecro c rll,rqo, KoHrpaKr lb 1 ... FX, RX1602, 516, S32, SD16, SD8, SE2OO,
SF3OO, SF4OO, SM2OO, SM4OO, so400, sP400, sP13220, SRC2496, **SU9920**,
SX2442FX, SX3o4o, 5X3242FX,SX3282, SX4882, TM3oO, TN6232, TO100, TO800,
TP300, TU3oo, uB10o2...

lang:es score:22 filesize: 227.69 K page_count: 3 document date: 2015-03-17

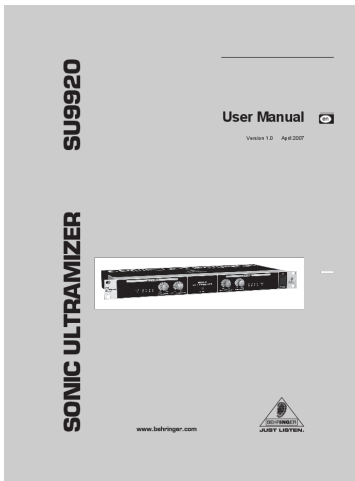


[pdf] User Manual Installation Guide Instructions

untitled SONIC ULTRAMIZER SU9920 sdm m netdna ssl manual 1 Read these instructions 2 Keep 3
Heed all warnings 4 Follow 5 Do not use this apparatus near water 6 Clean only with dry cloth 7 block
any ventilation openings Install in accordance the manufacturer s 8 install heat sources such as radiators
home httpd data media EN Rev A web 6833b508ea24c47d059b93de5df136b0 c3 zzounds 80 starin info
Product Info Behringer Manuals

...

lang:es score:22 filesize: 3.87 M page_count: 12 document date: 2007-04-20

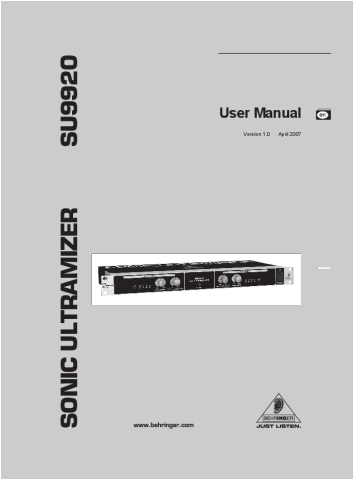


[pdf]

untitled SONIC ULTRAMIZER SU9920Procesor sunet ultramizer Behringer SU9920partysound ro
manuals party Procesor SU9920 srsItid AfmBOoqhe5XMVnff3dbL1moiH6nHt0iui
xV5vwvdxCt9GtcmSejwewm SU9920SONIC xV5vwvdxCt9GtcmSejwewmpartysound
AfmBOoo5D081MFo9JHtiUgE0k1iks3G7qdY8rv6PFV4S2DW L XURs0N |||

...

lang:es score:20 filesize: 3.87 M page_count: 12 document date: 2007-04-20

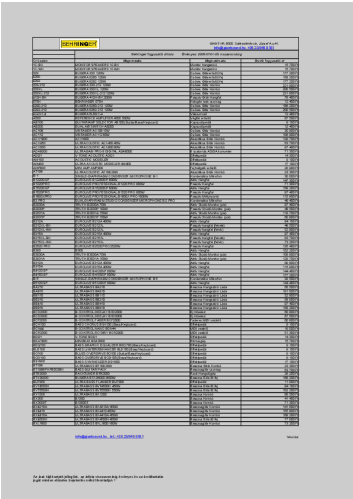


[pdf]

Korcz József Info@giantssound hu 36 20 946 8181 Best Computer Monitors Behringer Monitor Speakers
1c behringer arlista honlapra giantsound files |||

Cikkszm 1C-BK 1C-WH 333 6260 6262 333-212 333XL 333XL-212 412H-BK 575H
6260-212 6262-212 6L6GC-4 A50 ... 400 SO400 SUPER OCTAVER SO400 SP400
SUPER PHASE SHIFTER SP400 SRC2496 ULTRAMATCH PRO SRC2496 **SU9920**
SONIC ULTRAMIZER **SU9920** SX2442FX EURODESK SX2442FX SX3242FX
EURODESK SX3242FX T1953 TU...

lang:de score:19 filesize: 99.64 K page_count: 4 document date: 2009-07-25

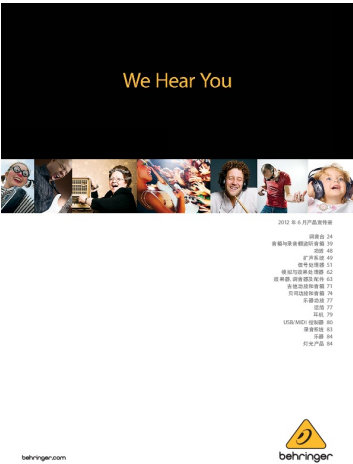

[Behringer 2012 Product Catalog: Comprehensive Audio Equipment Guide](#)

A detailed overview of Behringer's 2012 product line, covering mixers, amplifiers, speakers, microphones, DJ equipment, guitar and bass gear, effects pedals, and accessories. Features product specifications, key technologies, and artist endorsements.

lang:tl score:19 filesize: 11.1 M page_count: 45 document date: 2012-06-07



[pdf] Catalog

untitled BEHRINGER Full Line Catalog 2008 SPANISH music group 80 software behringer catalogue 08 micfonos, sistemas inalmbricos y auriculares 8 mezcladores 10 altavoces y amplificadores 16 tecn ... le Conmutador de polaridad para corregir problemas de fase Realzadores de sonido SONIC ULTRAMIZER **SU9920** El procesador estreo para realce de sonido SONIC ULTRAMIZER **SU9920** es ideal para estudios de ... lang:es score:17 filesize: 3.36 M page_count: 25 document date: 2008-04-30



[pdf] User Manual Catalog

untitled BEHRINGER Full Line Catalog 2008 PORTUGUESE music group 80 software behringer catalogue 08 microfonos, sistemas sem fio e fones de ouvido 8 mixers e mixers amplificados 10 alto-falantes e ... s de 6 segmentos para uma indicao precisa do nvel Processadores de realce de som SONIC ULTRAMIZER **SU9920** SONIC EXCITER SX3040 O processador de realce de som SONIC ULTRAMIZER **SU9920** o mximo em equ... lang:pt score:17 filesize: 3.27 M page_count: 25 document date: 2008-05-02



[pdf]

leaflet FA ai agnes bmb bmbkaraoke my assets You Can Register with BMB www.bmbkaraoke.com.my BMB product often being imitate but it is never the ... Cable for NKN 300 Black 1 unit IVA SW-500 IVA12 8 ohm 300W Active Subwoofer 1 unit Behringer **SU9920** Behringer Ultimate Stereo Sound Enhancement Processor RM 10,399.00 Designed and Engineered ... lang:en score:17 filesize: 417.27 K page_count: 2 document date: 2012-08-14



[pdf]

IMPL Comp GLOB Report P0487 CSA 1476789 2007 02 27 Rev 0 yong luo RnD Document Certificate

Index of media PLM data docs media63 music group |||

Certificate of Compliance Certificate: 1476789 Project: Issued to: 1882516

BEHRINGER Holdings Pt ... 04/02/02 Description Update to CSA report 1476789 to

include alternative components and new models **SU9920** SX3040 Original

Certification. ...

lang:en score:16 filesize: 101.57 K page_count: 3 document date: 2010-05-05



[pdf]

IMPL Comp GLOB Report P0582 CSA 1476789 2007 02 27 Rev 0 yong luo RnD Document Certificate

Index of media PLM data docs media63 music group |||

Certificate of Compliance Certificate: 1476789 Project: Issued to: 1882516

BEHRINGER Holdings Pt ... 04/02/02 Description Update to CSA report 1476789 to

include alternative components and new models **SU9920** SX3040 Original

Certification. ...

lang:en score:16 filesize: 101.52 K page_count: 3 document date: 2010-05-05



[pdf]

bmbkaraoke my bmb package 03042013 assets

You Can Register with BMB www.bmbkaraoke.com.my Due to its popularity and

success, BMB products are ... icrophone Cable for NKN 300 Black 1 unit IVA SW-500

IVA12 300W Active Subwoofer 1 unit Behringer **SU9920** Behringer Ultimate Stereo

Sound Enhancement Processor RM 10,399.00 PACKAGE CSX 12 4 1 unit ...


lang:en score:16 filesize: 1.49 M page_count: 2 document date: 2013-04-03



[pdf] Catalog

untitled 09 bax shop nl 2 3 BEHRINGER CITY where musical passion meets quality T he city of Zhong Shan in Guangdong Province China is a modern metropolis with scenic parks 2009 Catalog EN ||| V1 EN 09 NEW PRODUCT SECTION 4 Microphones, Wireless Systems and Headphones 16 Mixers and Powered ... itchable polarity reverse to correct phase problems Sound Enhancement Processors SONIC ULTRAMIZER **SU9920** SONIC EXCITER SX3040 The SONIC ULTRAMIZER **SU9920** stereo sound enhancement processor is the ...

lang:en score:15 filesize: 5.07 M page_count: 29 document date: 2009-02-11

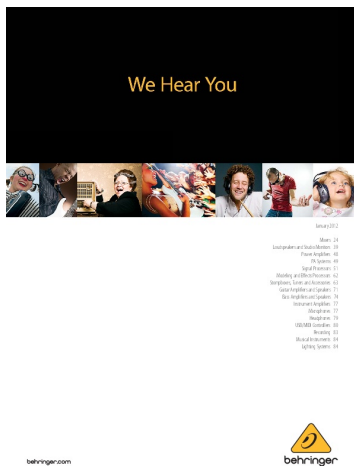


[pdf] Accessories Catalog

MARK Serv Grap GLOB 2012 BEHRINGER Catalog EN V1 2011 12 29 Rev 1 indd j lalogan CATALOG behringer assets

January 2012 Mixers 24 Loudspeakers and Studio Monitors 39 Power Amplifiers 48 PA Systems 49 Signal ... ical frequencies and can also be used as Audio Analyzer Audio Enhancers Exciters SONIC ULTRAMIZER **SU9920** Additional Low-cut filter removes unwanted frequencies, e. g. floor rumble Accurate 6-segm...

lang:en score:15 filesize: 10.75 M page_count: 45 document date: 2011-12-29

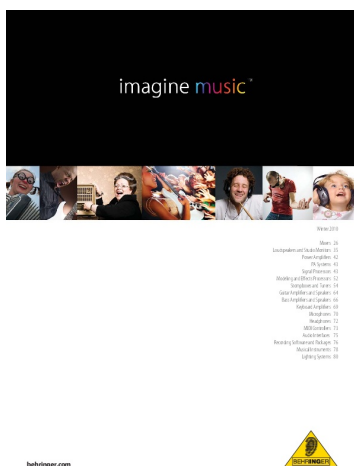


[pdf] Catalog

IMPL Grap PH Artwork 2010 BEHRINGER Catalog EN V2 01 07 Rev 1 indd j lalogan Index of Product Info Behringer Archive starin info |||

behringer.com Winter 2010 Mixers 26 Loudspeakers and Studio Monitors 35 Power Amplifiers 42 PA Syst ... stacked on top of each other to create an ultra-compact signal processor solution SONIC ULTRAMIZER **SU9920** Audio Enhancers Exciters t Additional sweepable high and low-cut filters for each channel...


lang:en score:15 filesize: 10.95 M page_count: 43 document date: 2010-01-08

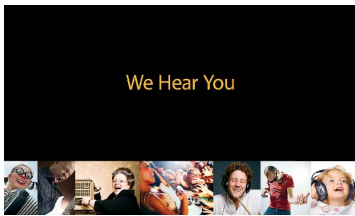

[Behringer Product Catalog 2011: Sound Equipment for Musicians and Professionals](#)

Explore the comprehensive 2011 Behringer product catalog, featuring a wide range of audio equipment including mixers, amplifiers, loudspeakers, microphones, DJ gear, and studio monitors designed for musicians and audio professionals.

lang:en score:15 filesize: 10.5 M page_count: 43 document date: 2011-02-14

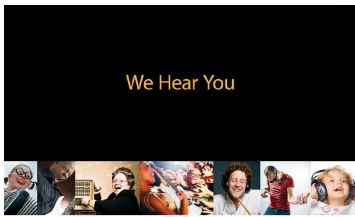


[\[pdf\] Accessories Catalog](#)

MARK Serv Grap GLOB 2012 BEHRINGER Catalog EN V1 2011 12 29 Rev 1 indd j lalogan behringer catalog en v1 invask ru files e catalogues |||

January 2012 Mixers 24 Loudspeakers and Studio Monitors 39 Power Amplifiers 48 PA Systems 49 Signal ... ical frequencies and can also be used as Audio Analyzer Audio Enhancers Exciters SONIC ULTRAMIZER **SU9920** Additional Low-cut filter removes unwanted frequencies, e. g. floor rumble Accurate 6-segm...

lang:en score:15 filesize: 10.77 M page_count: 45 document date: 2012-12-12

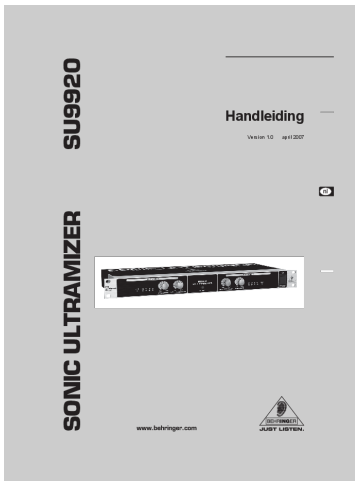


[\[pdf\]](#)

untitled SU9920 P0487 M NL behringer 80 EN

...

lang:en score:14 filesize: 3.55 M page_count: 8 document date: 2007-04-20

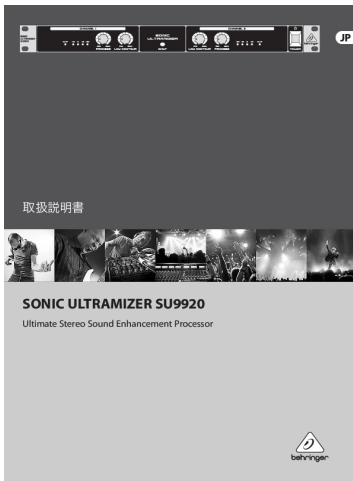

[\[pdf\]](#) User Manual

SONIC ULTRAMIZER SU9920 BEHRINGER


16 juil

2020 — su9920 p0487 m jp 8850057363486 P0487 M JP midimanuals manuals behringer user manual

japanese mediadl musictribe media sys master hbd h05 music group PLM data docs

...

lang:fr **score:14** filesize: 2.35 M page_count: 10 document date: 2013-04-08

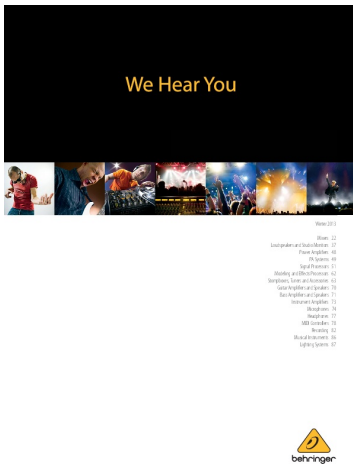

[\[pdf\]](#) Accessories Catalog

MARK Serv Grap GLOB 2013 BEHRINGER Catalog EN V1 01 11 Rev 0 indd j lalogan Index of Product

Info Behringer starin info |||


Winter 2013 Mixers 22 Loudspeakers and Studio Monitors 37 Power Amplifiers 48 PA

Systems 49 Signal P ... ical frequencies and can also be used as Audio Analyzer

Audio Enhancers Exciters SONIC ULTRAMIZER **SU9920** Additional Low-cut filter

removes unwanted frequencies, e. g. floor rumble Accurate 6-segm...

lang:en **score:14** filesize: 10.69 M page_count: 45 document date: 2013-01-23

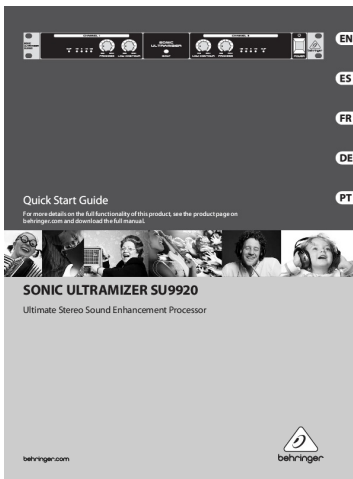


[\[pdf\]](#)

SONIC ULTRAMIZER SU9920 BEHRINGER 51673 1 r2 gear4music media 5 |||

...


lang:en **score:14** filesize: 1.58 M page_count: 12 document date: 2012-01-09

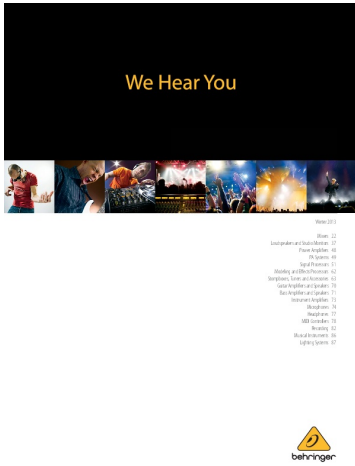

[\[pdf\]](#) Accessories Catalog

MARK Serv Grap GLOB 2013 BEHRINGER Catalog EN V1 01 11 Rev 0 indd j lalogan behringer winter catalog invask ru files e catalogues |||

Winter 2013 Mixers 22 Loudspeakers and Studio Monitors 37 Power Amplifiers 48 PA Systems 49 Signal P ... ical frequencies and can also be used as Audio Analyzer Audio Enhancers Exciters SONIC ULTRAMIZER **SU9920** Additional Low-cut filter removes unwanted frequencies, e. g. floor rumble Accurate 6-segm... lang:en score:14 filesize: 10.86 M page_count: 45 document date: 2013-01-26

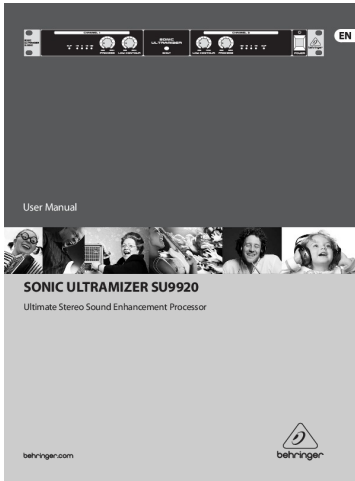

[\[pdf\]](#)

SONIC ULTRAMIZER SU9920 BEHRINGER 861716cc13f50af948cba4bf310bbf18 deep sound ru upload iblock 861

... lang:en score:14 filesize: 1.86 M page_count: 10 document date: 2012-07-12