

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [UNIKOO](#) /

› [UNIKOO Queen Series UKS05-5576-CH Frameless Sliding Shower Door Instruction Manual](#)

## UNIKOO UKS05-5576-CH

# UNIKOO Queen Series UKS05-5576-CH Frameless Sliding Shower Door Instruction Manual

Model: UKS05-5576-CH

Brand: UNIKOO

## IMPORTANT SAFETY INFORMATION

Please read all instructions carefully before installation and use. Failure to follow these instructions may result in injury or product damage. Keep this manual for future reference.

- Installation is recommended to be performed by two professional installers.
- Always wear safety glasses during installation to prevent eye injury.
- Ensure the wall surface is even and smooth before installation.
- Handle glass panels with extreme care to avoid breakage and injury.

## PRODUCT OVERVIEW

The UNIKOO Queen Series UKS05-5576-CH is a frameless stainless steel sliding shower door designed for modern bathrooms. It features 3/8" (10mm) certified tempered clear glass and solid stainless steel rollers for smooth operation. The door is reversible for left or right-hand installation.



Image: UNIKOO Queen Series Frameless Sliding Shower Door in a modern bathroom setting.

## Key Features:

- **Frameless & Reversible Door:** Modern design with customizable left or right-hand installation.
- **High Quality Material:** 3/8" (10mm) thick SGCC certified tempered safety glass and solid SU304/316 stainless steel rollers.
- **Easy Installation:** Includes all necessary parts and hardware, with flex-sizing for horizontal adjustability.
- **EnduraClean:** High-quality stainless steel hardware ensures a sleek, rust-free finish and resists rust, chips, or scratches.
- **Waterproof Design:** Water-resistant threshold and clear plastic seal to keep water inside the shower unit.

## TOOLS REQUIRED

The following tools are typically required for installation:

- Spirit Level / Laser Level
- Power Drill (with 1/4" drill bit for ceramic tiles)

- Pencil
- Silicone Sealant
- Mallet
- Tape Measure
- Screwdriver
- Drill Bits (6mm & 3mm or 1/4" & 1/8")
- Hacksaw
- Safety Glasses

## SETUP AND INSTALLATION

---

This section provides detailed steps for installing your UNIKOO shower door. For a visual guide, please refer to the installation video below.

Your browser does not support the video tag.

Video: Official UNIKOO UKS05 Installation Guide. This video demonstrates the step-by-step process for installing the shower door, including wall preparation, hardware assembly, and glass panel placement.

### Pre-Installation Steps:

1. **Inspect Wall Condition:** Ensure the wall surface is even and smooth.
2. **Determine Door Orientation:** Decide whether to install the door for left or right-hand operation based on site conditions.
3. **Measure and Mark:** Use a spirit level or laser level to measure the wall. Attach the height template (provided in the box) to both sides of the wall.
4. **Drill Holes:** Select appropriate hole positions based on your shower door's height. Drill 1/4" holes.

### Installing the Top Header:

5. **Install Wall Mount Brackets:** Insert wall anchors into drilled holes. Remove wall mount bracket covers using an Allen wrench. Align brackets with holes and securely tighten with screws.
6. **Prepare Header Bar:** Measure the desired length of the header bar and use a hacksaw to cut it to size, ensuring smooth and flat edges.
7. **Attach Header Bar:** Insert the two wall mount bracket covers into the header bar. Align them with the installed wall mount brackets and push them securely into place. Tighten the screws on both sides of the covers using an Allen wrench.

### Installing Glass Door Rollers:

8. **Assemble Rollers:** Place the rollers in the correct sequence over the holes in the glass door. Use screws to tighten the rollers, then fasten the back cover securely.
9. **Secure Glass to Track:** Secure the glass to the track first to ensure accurate installation of the bottom guide. Loosen the covers, remove the glass from the track, and place it in a safe location.

### Installing the Bottom Guide:

10. **Mark and Drill:** Use a level to ensure the glass is vertically aligned. Mark the positions for the glass clamping holes with a marker. Drill 1/4" holes.
11. **Install Clamps:** Insert anchors into the ground. Align the clamps with the holes and tighten them with screws. Install the glass gasket.
12. **Adjust Fixed Panel (if needed):** If the wall is not straight, it is recommended to add an additional U

channel to properly align the fixed panel. Make necessary adjustments to the plastic seal on the door side.

13. **Secure Fixed Panel:** Align the glass-holding holes with the slide hangers. Install the spacers and securely tighten the knobs using an Allen wrench.
14. **Install Bottom Guide:** Remove the bottom guide. Snap the left-side piece onto the glass first, then tighten the side screws. Ensure the glass snaps securely into place against the bottom guide, then push it in and tighten the screws to secure its position.
15. **Prepare Threshold:** Measure the desired length of the threshold and use a hacksaw to cut it to the correct size, ensuring smooth and flat edges.

## Final Adjustments and Finishing:

16. **Adjust Glass Level:** If the glass is uneven in height, adjust the eccentric screws on the wheels to ensure the glass is level.
17. **Install Anti-Jump Nails:** After ensuring the glass is level, install anti-jump nails to prevent the glass from accidentally falling.
18. **Install Handles:** Install the interior puller and spacer, and securely tighten the screws. Next, install the exterior puller and tighten the bottom screws using an Allen wrench.
19. **Apply Plastic Seals:** Install plastic seals along the edges of both glass panels.
20. **Apply Glass Adhesive:** Apply glass adhesive to fill the bottom gap completely, covering the entire bottom surface. Allow 24 hours for it to set before use.

## OPERATING INSTRUCTIONS

---

The UNIKOO Queen Series shower door is designed for smooth and effortless operation.

- To open or close the door, gently slide the glass panel along the top rail using the handle.
- The frameless design allows for easy sliding.
- The reversible door allows for flexible entry and exit depending on your preference.

## MAINTENANCE

---

Proper maintenance will ensure the longevity and appearance of your shower door.

- **Glass Cleaning:** The 3/8" (10mm) tempered safety glass is designed for easy cleaning and to resist water spots. Use a soft cloth and a non-abrasive glass cleaner. Avoid harsh chemicals or abrasive pads that could scratch the glass.
- **Hardware Care:** The high-quality stainless steel hardware is designed to be rust-free. Clean with a soft, damp cloth. Avoid abrasive cleaners that can damage the finish.
- **EnduraClean Coating:** The glass is treated with an innovative Enduro Shield, an invisible treatment that repels water, soap scum, and grime, significantly decreasing cleaning time.



Image: Comparison showing water beading on treated glass versus untreated glass, highlighting the Easy-Cleaning Coating.

## TROUBLESHOOTING

Here are some common issues and their solutions:

- **Uneven Glass:** If the glass appears uneven in height after installation, use an Allen wrench to adjust the eccentric screws on the wheels until the glass is level.
- **Wall Not Straight:** If your wall is not perfectly straight, it is recommended to acquire an additional U channel to properly align the fixed panel during installation.
- **Water Leakage:** Ensure all plastic seals are correctly installed and that glass adhesive has been properly applied and allowed to cure for 24 hours. Check the threshold positioning.

## SPECIFICATIONS

# OVERALL DIMENSIONS

- Ø 70 ROLLER
- 9" SQUARE HANDLE
- BOTTOM GUIDE WIDTH: 2-3/4"

## UKS05-55X76 MODEL

- FOR 50"-55" OPENING
- 3/8" CLEAR TEMPERED GLASS

**A :50"-55"**

MODEL WIDTH

**B :76"**

MODEL HEIGHT

**C :30"**

DOOR WIDTH

**D :26-1/2"**

FIXED PANEL

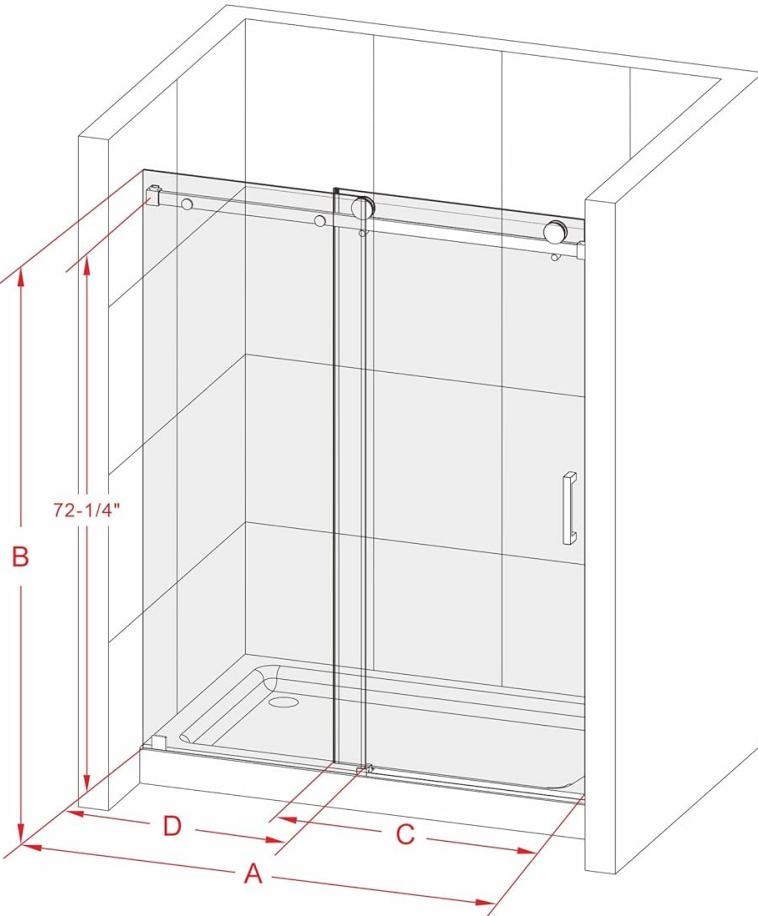


Image: Diagram illustrating the overall dimensions of the UKS05-5576-CH shower door, including model width, height, door width, and fixed panel dimensions.

Specification	Detail
Brand	UNIKOO
Model	UKS05-5576-CH
Color	Bright Chrome
Material	Steel
Style	Adjustable, Modern
Assembly Required	No (referring to pre-assembled components, but installation is required)
Product Dimensions	0.4 x 55 x 76 inches
Size	55" W x 76" H
Glass Thickness	3/8" (10mm) Certified Tempered Clear Glass

## WARRANTY AND SUPPORT

UNIKOO is committed to providing high-quality products and excellent customer service.


- Worry-free Service:** We provide 24/7 online consulting services.
- Comprehensive Support:** All products include pre-sales, installation, and after-sales service.
- Contact Us:** If you have any questions or problems with the product, please consult UNIKOO online customer service. We are dedicated to resolving any issues you may encounter.

For further assistance, please visit the official UNIKOO store or contact customer support directly.

© 2025 UNIKOO. All rights reserved.

### Related Documents - UKS05-5576-CH

 UKD01 INSTRUCTION MANUAL  2 PEOPLE REQUIRED Scan for visualization video	<p><a href="#">Unikoo UKD01 Sliding Shower Door Instruction Manual</a></p> <p>Detailed installation guide for the Unikoo UKD01 sliding glass shower door, including parts list, tools required, and step-by-step assembly instructions.</p>
 UKH07 INSTRUCTION MANUAL  Scan for visualization video	<p><a href="#">Unikoo UKH07 Shower Door Installation Manual and Warranty</a></p> <p>Comprehensive installation guide and limited warranty information for the Unikoo UKH07 shower door, featuring step-by-step instructions, parts list, and care guidelines.</p>
 UKS04 THE KING SERIES INSTRUCTION MANUAL  Scan for visualization video	<p><a href="#">Unikoo UKS04 The King Series Shower Door Installation Manual</a></p> <p>Comprehensive instruction manual for the Unikoo UKS04 The King Series shower door, detailing installation steps, parts list, tools required, and warranty information.</p>
 Smart Toilet INSTRUCTION MANUAL  Scan for visualization video	<p><a href="#">UNIKOO Smart Toilet Installation Manual and User Guide</a></p> <p>This document provides comprehensive installation instructions, user guidance, technical specifications, maintenance procedures, troubleshooting tips, and warranty information for the UNIKOO Smart Toilet.</p>



## [WOODBRIDGE Frameless Single Sliding Shower Door - SEAZ-6080 Series Dimensions and Specifications](#)

Detailed specifications and dimensions for the WOODBRIDGE SEAZ-6080 series frameless single sliding shower door. Features 3/8" (10mm) tempered glass, adjustable width from 56" to 60", and a height of 80".