Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

COOAU D20, D20S, D30S, M53

COOAU Car Dash Cam Mounting Bracket Instruction Manual

Brand: COOAU

1. Introduction

This instruction manual provides comprehensive guidance for the installation, operation, and maintenance of your COOAU Car Dash Cam Mounting Bracket. This kit includes both a suction cup mount and a 3M adhesive mount, offering flexible and secure options for attaching your dash camera to your vehicle's windshield or dashboard. Designed for compatibility with various COOAU dash cam models, this bracket ensures optimal positioning and stability for your recording needs.

2. Product Overview

2.1 Package Contents

The COOAU Car Dash Cam Mounting Bracket package includes the following components:

- 1 x Suction Cup Mount
- 1 x 3M Adhesive Mount



Figure 2.1: Overview of the COOAU Dash Cam Mounting Bracket components, including the suction cup mount and the 3M adhesive mount.

2.2 Key Features

- **Flexible Mounting Options:** Includes both suction cup and 3M adhesive mounts for versatile placement.
- **Secure and Stable Installation:** Designed to keep your dash cam firmly in place during vehicle operation.
- **Quick and Effortless Installation:** Simple setup process requiring no special tools.
- **Adjustable Viewing Angle:** Allows for optimal positioning to capture desired footage.
- **Durable and Long-Lasting:** Constructed from high-quality plastics and rubber for extended use.



Figure 2.2: Illustration of the key features of the mounting bracket, emphasizing its adjustability and secure design.

2.3 Compatibility

This mounting bracket is compatible with various COOAU dash cam models, including but not limited to:

- COOAU D20
- COOAU D20S
- COOAU D30S
- COOAU M53



Figure 2.3: Visual representation of compatible COOAU dash cam models.

3. Installation

3.1 Suction Cup Mount Installation

1. **Step 1: Clean the Windshield.** Thoroughly clean the area on your windshield where you intend to mount the dash cam. Ensure the surface is free of dust, dirt, and grease for optimal suction.

2. **Step 2: Attach the Mount.** Press the suction cup firmly against the cleaned windshield surface. While pressing, rotate the locking knob clockwise to secure the suction cup. You will hear a click or feel resistance indicating it is locked.
3. **Step 3: Attach the Dash Cam.** Slide your COOAU dash cam onto the mounting bracket until it clicks securely into place.
4. **Step 4: Adjust and Test.** Adjust the angle of the dash cam for optimal viewing. Ensure the mount is stable by gently wiggling it.



Figure 3.1: Step-by-step instructions for installing the suction cup mount.

3.2 3M Adhesive Mount Installation

1. **Step 1: Clean the Surface.** Choose a flat, clean, and dry surface on your windshield or dashboard. Clean the area thoroughly with an alcohol wipe and let it dry completely.
2. **Step 2: Prepare the Adhesive.** Peel off the protective film from the 3M adhesive pad on the mount.
3. **Step 3: Attach the Mount.** Carefully align the mount with the chosen surface and press it firmly for at least 30 seconds. Apply consistent pressure to ensure strong adhesion.
4. **Step 4: Allow Curing Time.** For best results, allow the adhesive to cure for at least 24 hours before attaching the dash cam or driving. This ensures maximum bonding strength.
5. **Step 5: Attach the Dash Cam.** Once the adhesive has cured, slide your COOAU dash cam onto the mounting bracket until it clicks securely into place.
6. **Step 6: Adjust and Test.** Adjust the angle of the dash cam for optimal viewing.

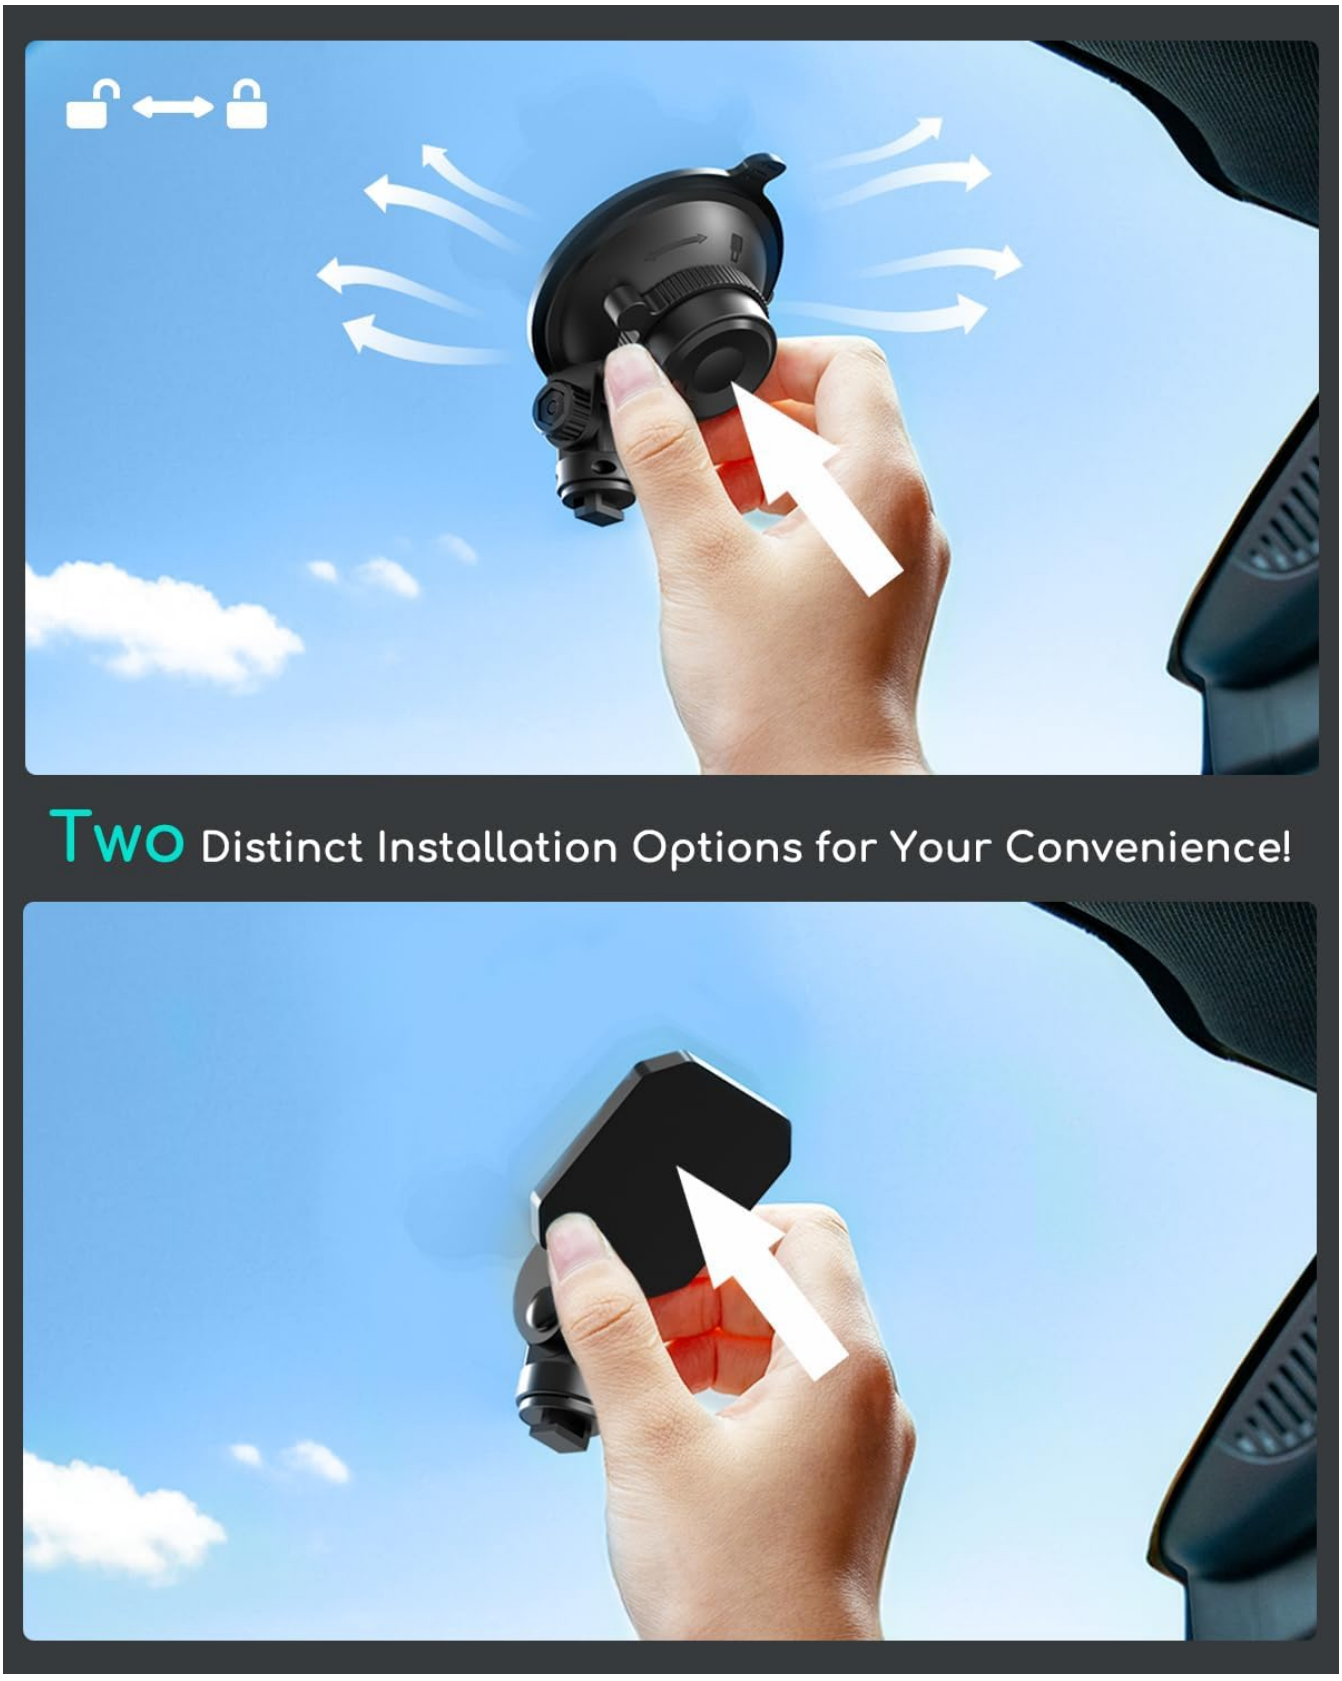


Figure 3.2: Visual comparison of the suction cup and 3M adhesive installation methods.

4. Operation and Adjustment

Both the suction cup and 3M adhesive mounts offer adjustable viewing angles to ensure you capture the best possible footage.

- **Vertical Adjustment:** The suction cup bracket adjusts vertically by up to 180 degrees.
- **Horizontal Adjustment:** The 3M adhesive bracket adjusts by up to 240 degrees.

- **360° Rotation:** Both mounts feature a 360-degree rotatable joint, allowing seamless switching between road and interior recording without needing to reposition the entire mount.



Figure 4.1: Illustration of the adjustable rotation and viewing angles for both mount types.

5. Maintenance

To ensure the longevity and optimal performance of your COOAU Car Dash Cam Mounting Bracket, follow these

maintenance guidelines:

- **Clean Surfaces:** Regularly clean the suction cup and the mounting surface (windshield/dashboard) to prevent dust and debris buildup, which can affect adhesion. Use a damp cloth and mild detergent if necessary, then dry thoroughly.
- **Inspect for Wear:** Periodically check the mounts for any signs of wear, cracks, or damage. If any damage is observed, replace the mount to ensure secure attachment of your dash cam.
- **Avoid Extreme Temperatures:** While designed to withstand daily use, prolonged exposure to extreme heat or cold can affect the material integrity. When possible, remove the dash cam and mount if the vehicle is parked in direct sunlight for extended periods in very hot climates.

6. Troubleshooting

Problem	Possible Cause	Solution
Suction cup not sticking or falling off.	• Dirty windshield surface. • Suction cup is dirty or damaged. • Insufficient pressure applied during installation. • Temperature fluctuations.	• Clean the windshield thoroughly with glass cleaner and dry completely. • Clean the suction cup with warm water and let it air dry. If damaged, replace the mount. • Ensure firm pressure is applied while rotating the locking knob. • Re-attach the mount when the vehicle interior temperature is moderate.
3M adhesive mount not holding.	• Surface not clean or dry. • Insufficient curing time. • Surface is not flat or smooth.	• Ensure the surface is perfectly clean and dry before application. • Allow at least 24 hours for the adhesive to cure before attaching the dash cam. • Re-apply to a flat, smooth surface. Consider using the suction cup mount if a suitable flat surface is unavailable.
Dash cam is loose on the mount.	• Dash cam not fully clicked into place. • Mounting bracket connection is worn.	• Ensure the dash cam is pushed firmly onto the bracket until it locks. • If the connection is worn, the mount may need to be replaced.

7. Specifications

Attribute	Detail
Product Dimensions	2.95 x 2.24 x 0.98 inches
Item Weight	2.39 ounces
Material	Plastics, Rubber
Color	Black

Attribute	Detail
Mounting Type	Windshield (Suction Cup, 3M Adhesive)
Special Feature	Adjustable, fit COOAU dash cam mounting
Manufacturer	COOAU
Date First Available	March 1, 2023

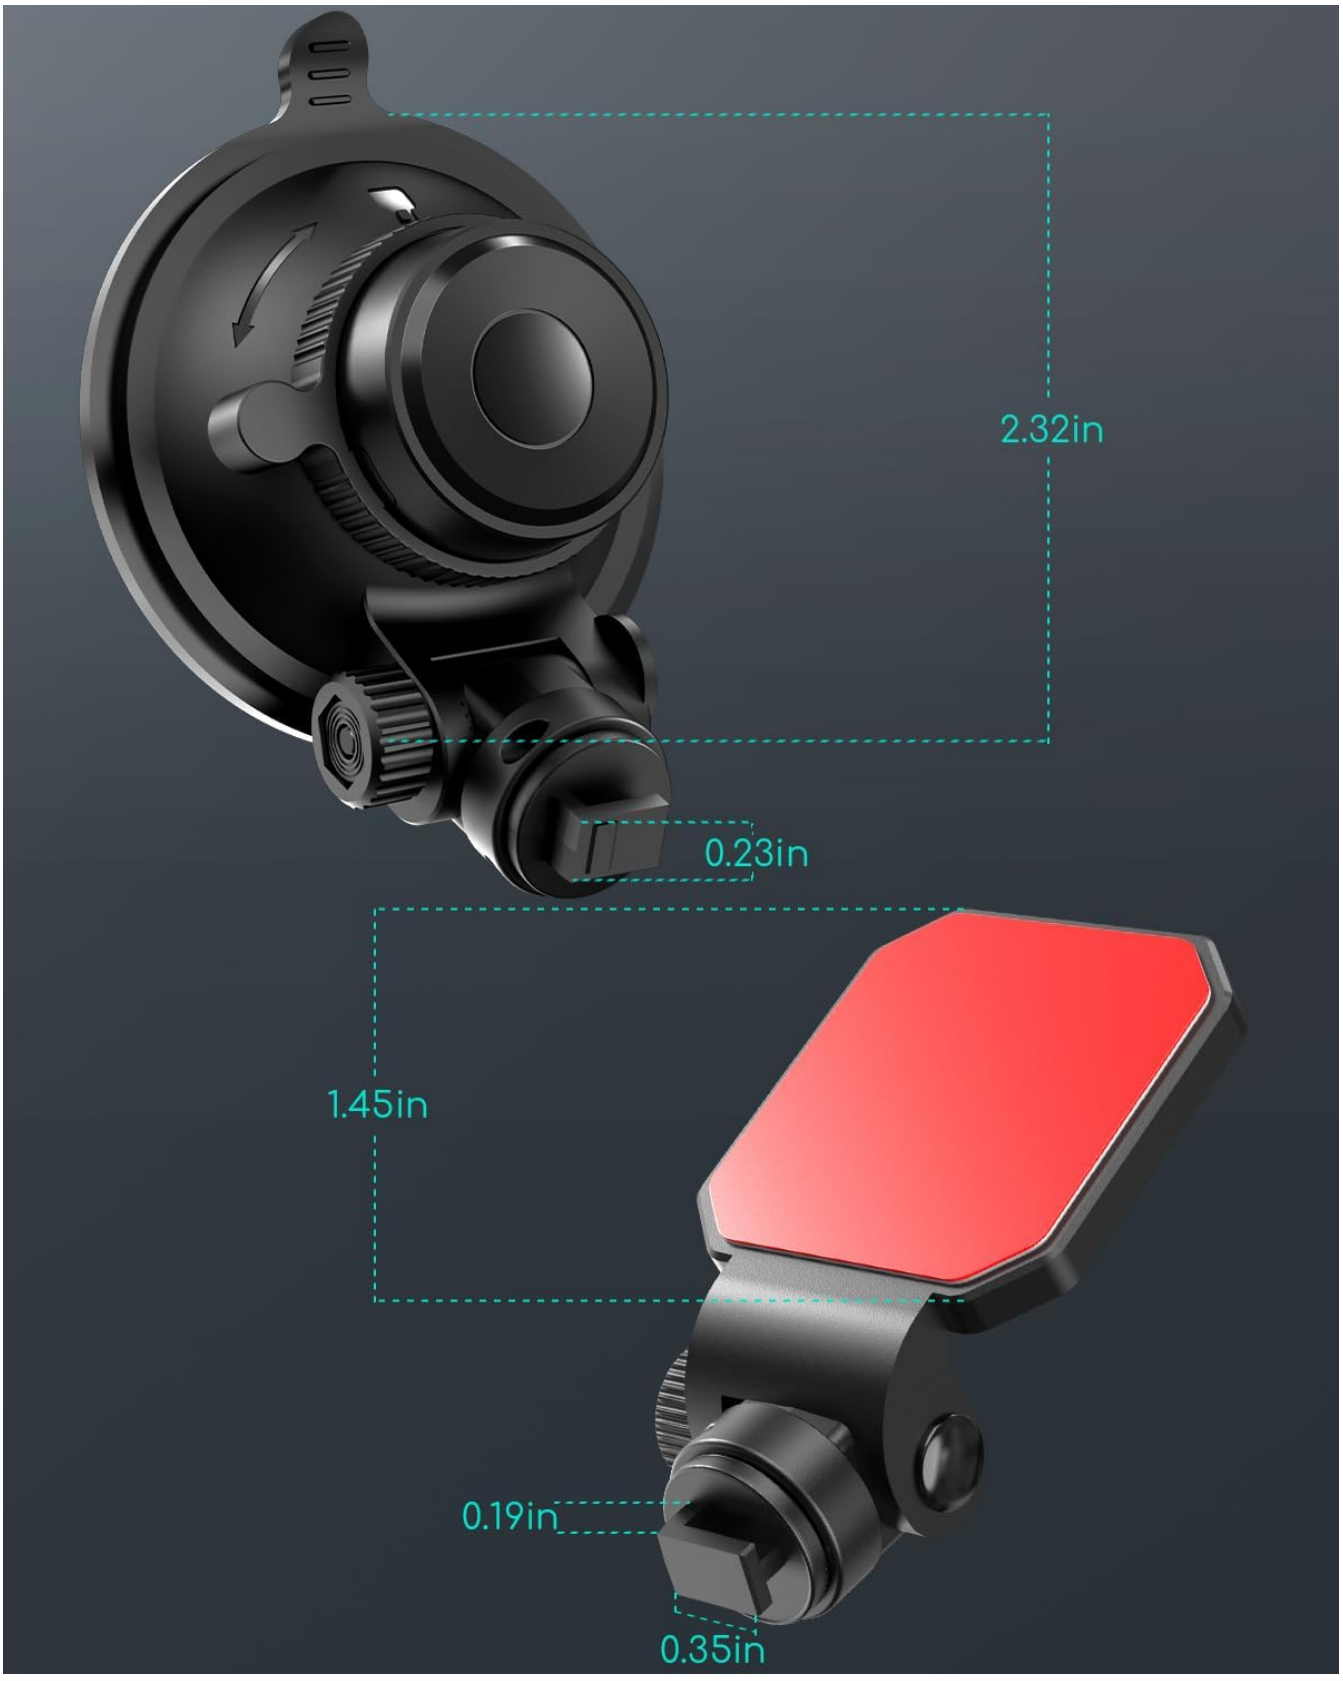


Figure 7.1: Dimensional specifications of the mounting brackets.

8. Warranty and Support

8.1 Warranty Information

COOAU stands behind the quality of its products. This dash cam mounting bracket comes with a **12-Month Warranty** covering any defects or malfunctions from the date of purchase. Please retain your proof of purchase for warranty claims.

8.2 Customer Support

For any questions, technical assistance, or warranty claims, please contact COOAU Customer Service. We are committed to providing superior customer service, including lifetime support and 24-hour service support.
Visit the official COOAU store on Amazon for more information and contact options:COOAU Amazon Store



Figure 8.1: COOAU's commitment to customer support.

© 2023 COOAU. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0BX5KNH6T

More documents and user manuals: **https://manuals.plus/**