

[Manuals.plus](#) /

› [EaseLife](#) /

› EaseLife 5FT/60in Bypass Double Sliding Pocket Door Hardware Kit Instruction Manual

EaseLife 0502_153_2

EaseLife 5FT/60in Bypass Double Sliding Pocket Door Hardware Kit Instruction Manual

Model: 0502_153_2

1. PRODUCT OVERVIEW

This manual provides detailed instructions for the installation, operation, and maintenance of the EaseLife 5FT/60in Bypass Double Sliding Pocket Door Hardware Kit. This commercial-grade aluminum kit is designed for two-door systems, ensuring smooth and quiet operation for bypassing closet doors.

The high-precision aluminum box track offers a concealed sliding mechanism for both aesthetic appeal and durability. The track can be customized to any required length.



Image 1.1: The EaseLife Bypass Double Sliding Pocket Door Hardware Kit installed, showing two doors in a closet opening.

2. PRODUCT COMPONENTS

The EaseLife 5FT/60in Bypass Double Sliding Pocket Door Hardware Kit includes the following components:

- (1) 5ft Rail
- (4) Rollers
- (1) Door Stop
- (1) Floor Guide
- (2) Finger Pulls

Note: Doors are not included with this hardware kit.



Image 2.1: All included components of the hardware kit, including the 5ft rail, rollers, door stop, floor guide, and finger pulls.

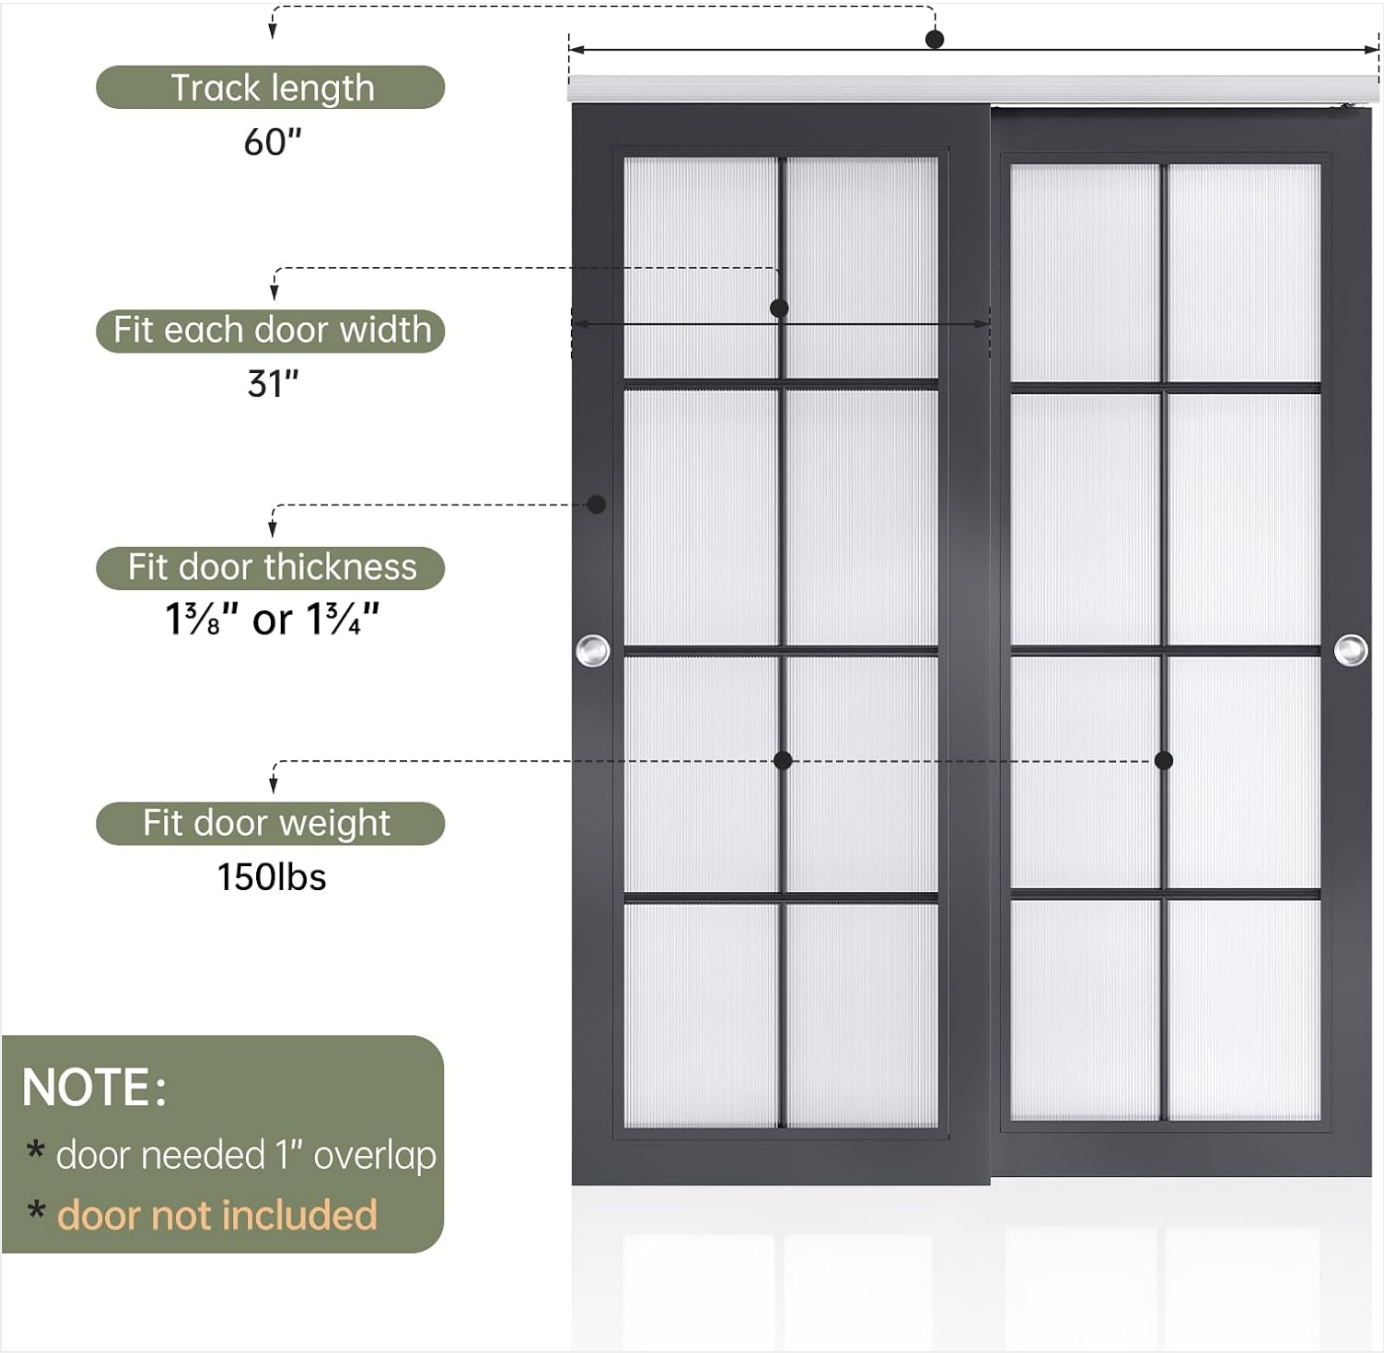


Image 2.2: Detailed view of the floor guide, door stopper, and finger pull, which are part of the kit.

3. SPECIFICATIONS

Feature	Detail
Brand	EaseLife
Model Number	0502_153_2
Color	Aluminum
Material	Aluminum
Track Length	5FT (60 inches)
Door Width Compatibility	Fits double 31" wide doors (requires 1" overlap)

Door Thickness Compatibility	1-3/8" or 1-3/4" (35mm or 45mm)
Weight Capacity (per door)	150 lbs
Installation Method	Wall-Mounted
Item Weight	7.8 Pounds
Product Dimensions	2 x 3.9 x 60 inches



Image 3.1: A diagram illustrating the required door dimensions and weight capacity for the 60-inch track.

4. SETUP AND INSTALLATION

The EaseLife Bypass Double Sliding Pocket Door Hardware Kit is designed for straightforward installation. A step-by-step graphic and text manual is provided with the product. For additional assistance, an online soft copy and professional installation guide are available through our online service.

Key Installation Considerations:

- Ensure the track is installed perfectly level to prevent doors from drifting. Shimming may be required.
- The track can be cut to a custom length if needed.
- Pilot holes are recommended for screws to prevent damage, especially when attaching hardware to doors.
- The quick-release locking tab on the rollers facilitates easy installation and removal of doors from the rail.



Image 4.1: Detail of the three-wheel roller mechanism and the aluminum track, highlighting the concealed sliding system.

5. OPERATING INSTRUCTIONS

The bypass design allows two doors to slide past each other, providing access to different sections of a closet or opening. The ball-bearing three-wheel rollers ensure smooth and quiet operation.

- To open or close the doors, gently slide them along the track using the installed finger pulls.
- The doors are designed to overlap by 1 inch when closed, ensuring a proper seal and appearance.

- The concealed sliding system maintains a clean and modern aesthetic.

Bypass Design



High precision aluminum box bypass track for double pocket door,
concealed sliding ensures beauty and durable



Image 5.1: Depiction of the bypass doors in both open and closed states, demonstrating the functionality.



Image 5.2: A close-up of the ball-bearing three-wheel rollers, illustrating their design for smooth and quiet sliding.

6. MAINTENANCE

To ensure the longevity and smooth operation of your EaseLife Bypass Double Sliding Pocket Door Hardware Kit, follow these maintenance guidelines:

- **Cleaning:** Periodically wipe the aluminum track and rollers with a soft, damp cloth to remove dust and debris. Avoid abrasive cleaners.
- **Lubrication:** If the rollers begin to feel less smooth over time, apply a small amount of silicone-based lubricant to the ball bearings. Avoid oil-based lubricants as they can attract dust.
- **Inspection:** Regularly check all screws and fasteners to ensure they are tight. Re-tighten any loose components to maintain stability and safety.
- **Door Alignment:** If doors become misaligned, adjust the roller mechanisms as needed. Refer to the installation manual for specific adjustment procedures.

7. TROUBLESHOOTING

This section addresses common issues and their potential solutions.

Common Questions:

- Q: Is the pocket door included?**
A: No, this product includes only the hardware kit. Doors must be purchased separately.
- Q: Can the track be cut to a custom length?**
A: Yes, the aluminum track can be cut to fit your specific requirements.
- Q: How much overlap is needed for double doors?**
A: For a double door system, a 1-inch overlap is recommended for proper function and appearance.
- Q: The doors do not stay closed or drift.**
A: This often indicates that the track is not perfectly level. Re-check the track's levelness and use shims if necessary to ensure it is horizontal.
- Q: Rollers are not sliding smoothly.**
A: Check the track for any obstructions or debris. Clean the track and rollers. If the issue persists, apply a silicone-based lubricant to the roller bearings.

8. WARRANTY AND SUPPORT

EaseLife specializes in sliding closet door hardware and is committed to customer satisfaction. All items undergo multiple inspections before market release.

If any components are missing or broken, or if you encounter any issues, please contact our customer support. We are available 24 hours a day to assist you.

For professional installation guidance or to access soft copies of manuals, please utilize our online service.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question