

[Manuals.plus](#) /

› [TOPOWN](#) /

› TOPOWN 5PCS Mobile Air Conditioner Window Plate Kit User Manual

TOPOWN TOP-532

TOPOWN 5PCS Mobile Air Conditioner Window Plate Kit

Model: TOP-532

INTRODUCTION

The TOPOWN 5PCS Mobile Air Conditioner Window Plate Kit is designed to provide an effective and adjustable sealing solution for portable air conditioner exhaust hoses in various window types. This kit helps to prevent hot air from entering your room, improving the efficiency of your air conditioner and contributing to energy savings. Its durable PVC construction ensures longevity and ease of use.

PACKAGE CONTENTS

- 5 x Adjustable Window Sealing Plates
- 1 x Universal Hose Adapter (for 5"/13cm and 5.9"/15cm hoses)
- 5 x Wing Screws for Plate Fastening
- 1 x Sealing Tape



Image: All components included in the TOPOWN 5PCS Mobile Air Conditioner Window Plate Kit, featuring the five adjustable plates, universal hose adapter, fastening screws, and sealing tape.

KEY FEATURES

- **Durable Material:** Constructed from lightweight yet robust PVC, ensuring durability and easy handling for installation and removal.
- **Adjustable Length:** Composed of five plates, the kit offers an adjustable length range from 45 cm (17.7 inches) to 200 cm (78 inches), accommodating various window heights.
- **Universal Compatibility:** Designed to fit all portable air conditioners with exhaust hoses of either 13cm (5 inches) or 15cm (5.9 inches) in diameter. It can be installed both vertically and horizontally in sliding windows.
- **Easy Installation:** Features a straightforward assembly process where plates slide together and are secured with screws, making setup quick and hassle-free.
- **Energy Saving:** By creating a tight seal around the window, the kit effectively prevents hot air from re-entering the room, thereby enhancing cooling efficiency and reducing energy consumption.

For vertical and horizontal sliding windows

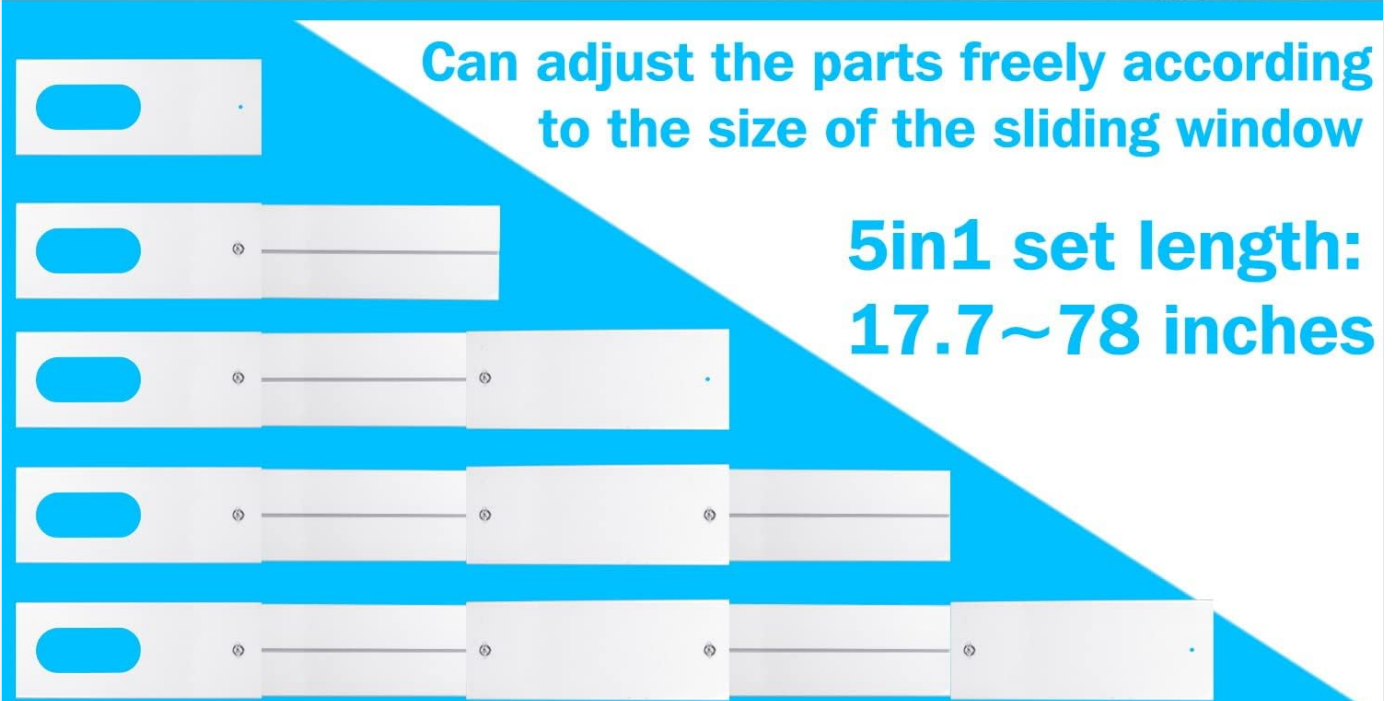


Image: Illustration of the adjustable length feature, showing how the five plates can be combined to achieve lengths from 17.7 to 78 inches to fit different window sizes.

TOPOWN Window Kit Vent Set

Universal design for left and right practicality and universality



Image: Examples demonstrating the kit's versatility for both horizontal and vertical sliding window installations.

5.9"/15cm and 5"/13cm universal air conditioner hose adapter



Image: Close-up view of the universal hose adapter, highlighting its internal thread for 5-inch (13cm) hoses and external thread for 5.9-inch (15cm) hoses.

SETUP AND INSTALLATION

Step-by-Step Installation Guide

1. **Assemble the Plates:** Identify the individual window plates. Slide them together to form the desired length. The plates are designed to interlock securely.
2. **Adjust Length:** Once assembled, slide the plates to match the exact height or width of your sliding window opening. The kit is adjustable from 45 cm (17.7 inches) to 200 cm (78 inches).
3. **Secure the Plates:** Insert the provided wing screws through the holes in the plates and tighten them to fix the plates at the adjusted length. **Important:** Do not overtighten the screws until the final length adjustment is complete.
4. **Attach Hose Adapter:** Connect the universal hose adapter to the designated opening on one of the window plates. For 13cm (5") hoses, use the internal thread by twisting clockwise or counter-clockwise. For 15cm (5.9") hoses, use the external thread.

5. **Install in Window:** Place the assembled window plate kit into the window rail. Ensure a snug fit to minimize air leakage. If necessary, apply the included sealing tape along the edges for an improved seal.
6. **Connect Exhaust Hose:** Attach your portable air conditioner's exhaust hose to the adapter on the window plate.

Coupler with universal threads

Practicality and universality



Image: A detailed illustration of how to insert and tighten the wing screws to secure the window plates during assembly. Note the caution against overtightening before final adjustment.

Easy to install

1 First

the screw through
the hole (groove side)

Then use screws to tighten and fix it (flat side)

2

Insert the screw
into the groove in the middle
of the movable plate to complete the splicing

Do not overtighten
the screws before
completing the
length adjustment.



Image: Demonstrates the flexible adjustment mechanism of the plates and how they are fastened to maintain the desired length, ensuring they do not easily fall off.

The universal adapter is suitable for both 5"/5.9" hose



- ✓ Easy to install
- ✓ Universal thread
- ✓ Top-quality PVC

TOPOWN

Hose Installation Method



For 13CM/5" Hose
Use internal thread



For 15CM/5.9" Hose
Use external thread

Image: Visual guide for connecting the air conditioner hose to the adapter, showing the appropriate twisting direction (clockwise or counter-clockwise) for both 5-inch and 5.9-inch hoses.



Image: An example of the portable air conditioner window kit fully installed in a sliding window, with the exhaust hose connected to a portable AC unit.

OPERATION

The TOPOWN Window Plate Kit operates by creating a sealed barrier in your sliding window opening, allowing the exhaust hose of your portable air conditioner to vent hot air outside while preventing outside air from entering. Once installed, ensure the plates are securely fastened and the hose is properly connected to maintain an optimal seal. No further operational steps are required for the kit itself beyond initial setup.

MAINTENANCE

To ensure the longevity and effectiveness of your window plate kit, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the PVC plates with a damp cloth and mild detergent as needed to remove dust or grime. Avoid abrasive cleaners that could damage the material.
- **Storage:** When not in use, disassemble the plates and store them in a cool, dry place away from direct sunlight. This will prevent material degradation and warping.
- **Inspection:** Periodically check the plates and adapter for any signs of wear, cracks, or damage. Ensure all screws are tight and the sealing tape is intact. Replace any damaged components if necessary.

TROUBLESHOOTING

Issue	Possible Cause	Solution
Air leakage around the kit.	Improper sealing or loose fit in the window.	Ensure plates are fully extended and secured. Apply the included sealing tape along gaps. Check window frame for irregularities.

Issue	Possible Cause	Solution
Hose adapter does not fit the AC hose.	Incorrect hose diameter or improper attachment.	Verify your AC hose diameter is either 13cm (5") or 15cm (5.9"). Ensure you are using the correct thread (internal for 5", external for 5.9") and twisting direction.
Plates slide or do not stay at desired length.	Screws are not tightened sufficiently.	Tighten the wing screws firmly to secure the plates at the desired length.
Difficulty assembling plates.	Misalignment or debris in grooves.	Ensure plates are aligned correctly before sliding. Check grooves for any obstructions and clear them.

SPECIFICATIONS

Feature	Detail
Model Number	TOP-532
Material	Durable PVC
Adjustable Length Range	45 cm (17.7 inches) to 200 cm (78 inches)
Hose Compatibility	13 cm (5 inches) and 15 cm (5.9 inches) diameter exhaust hoses
Product Dimensions (L x W x H)	12.7 x 5.08 x 12.7 cm (approx. 5 x 2 x 5 inches)
Product Weight	2.23 kilograms (approx. 4.9 lbs)

SUPPORT AND WARRANTY

For any questions regarding the installation process, product functionality, or other inquiries, please do not hesitate to contact TOPOWN customer support. While specific warranty details are not provided in this manual, our team is committed to assisting you with any concerns you may have.

Please refer to your purchase documentation or the TOPOWN official website for the most up-to-date support contact information and warranty policy details.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question