

[Manuals.plus](#) /

› [COMOMY](#) /

› COMOMY YG-39W 30-inch Tall Pressure Mounted Baby Gate Instruction Manual

COMOMY YG-39W

COMOMY YG-39W 30-inch Tall Pressure Mounted Baby Gate Instruction Manual

Model: YG-39W | Brand: COMOMY

IMPORTANT SAFETY INFORMATION

Please read and follow all instructions carefully before installation and use. Failure to do so could result in serious injury or death.

- This safety gate is designed for use with children from 6 to 24 months.
- Never use at the top of stairs without proper hardware mounting.
- Regularly check all fasteners and components to ensure they are secure and in good working order.
- Do not use if any parts are missing or damaged.
- Keep small children and pets away from the gate during installation.
- Ensure the gate is installed in an opening that is between 29.5 inches and 46 inches wide.
- Always ensure the gate is securely latched after passing through.
- The visual red/green indicator helps confirm proper tension and locking.




Figure 1: The COMOMY baby gate installed at the top of a staircase, demonstrating its use for child and pet safety.

PACKAGE CONTENTS

Verify all components are present before beginning installation.

- Gate Door x1
- Extension x3 (various sizes for width adjustment)
- Y-Shape Tension Bolt x2 (for round banisters)
- Tension Bolt x4 (for flat surfaces)
- Wall Cup x4 (for hardware mounting)
- Screw x4 (for hardware mounting)
- Dry Wall Anchor x4 (for hardware mounting)
- Wrench x1

Fits Opening between 29.5" to 46"

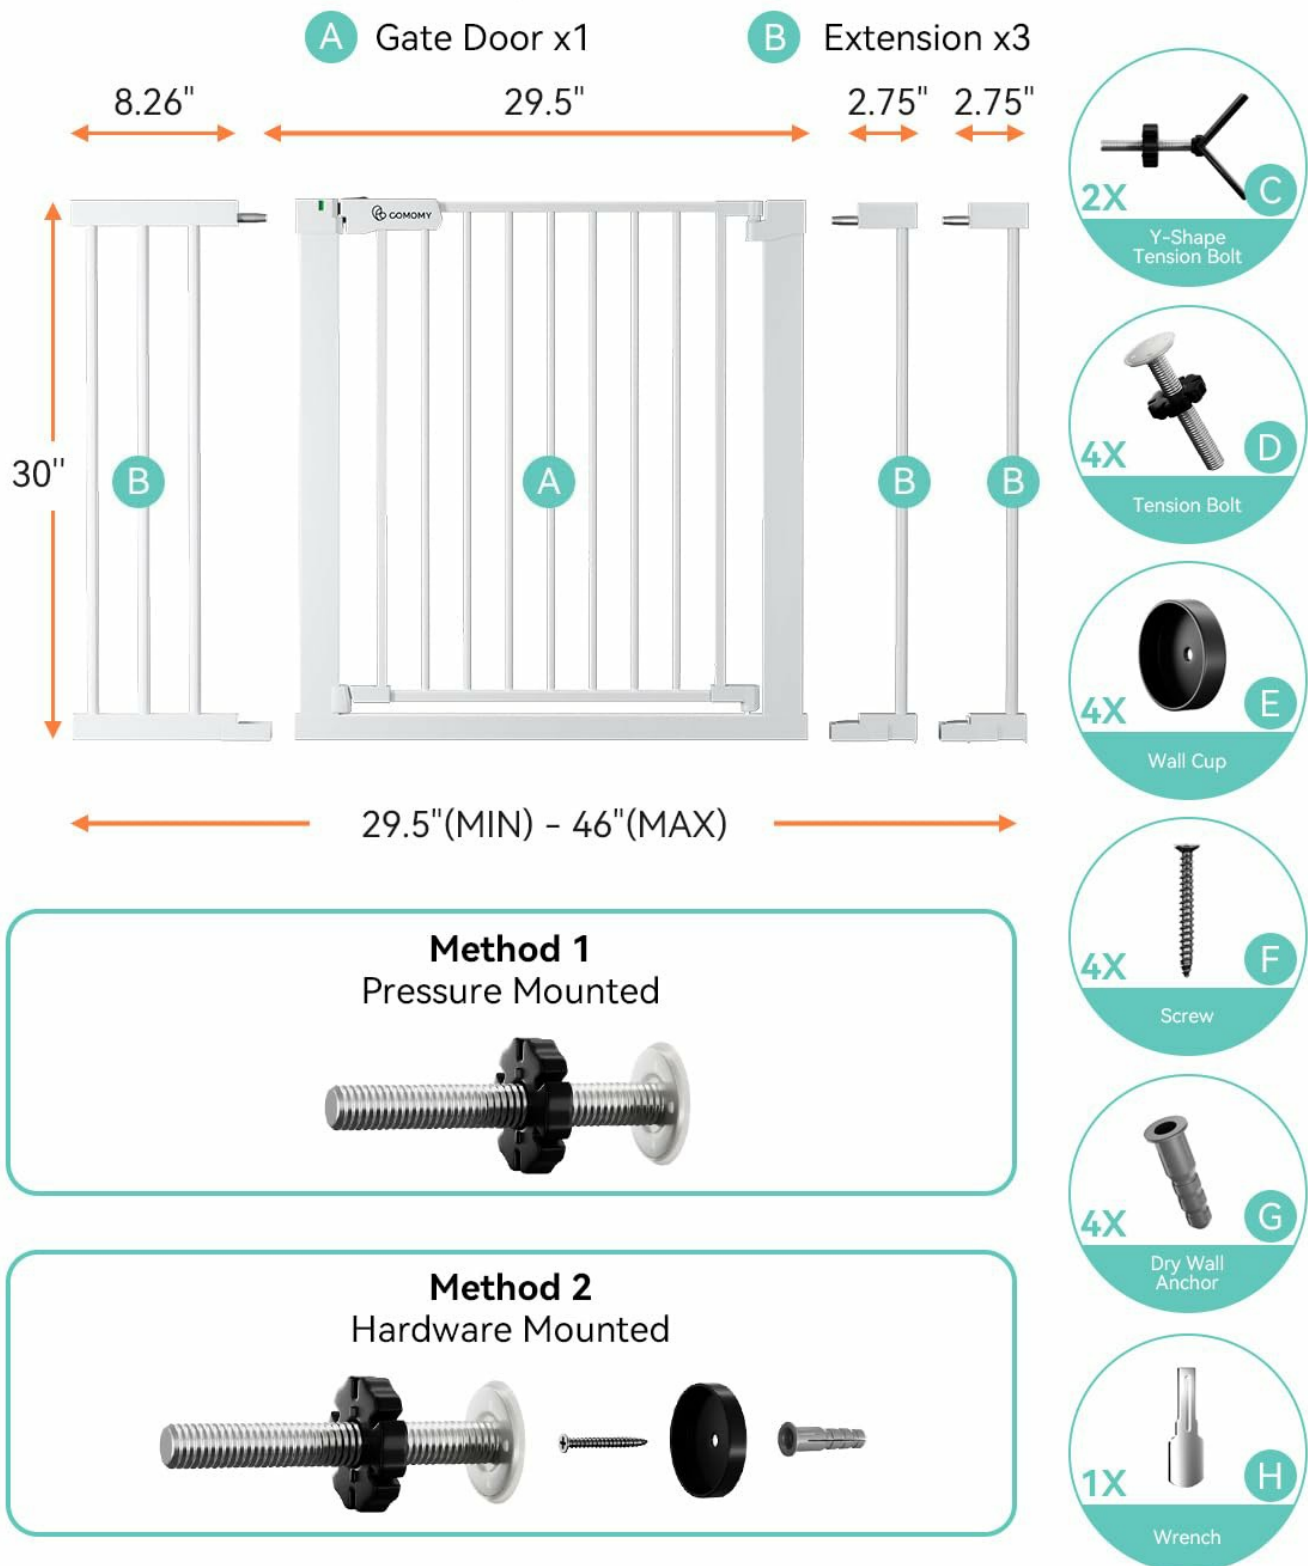

* The extensions can be assembled and disassembled according to your needs

Figure 2: Package contents and dimensions. The gate fits openings from 29.5 to 46 inches wide.

SETUP AND INSTALLATION

The COMOMY baby gate offers two installation methods: pressure mounted and hardware mounted. Choose the method appropriate for your location.

Pre-Installation Check

Before installation, note that gaps between the door lock and frame are normal and will close after proper installation. Do not cut the retaining tie until installation is complete.



Figure 3: Visual guide for pre-installation and post-installation appearance, emphasizing the normal initial gap.

Method 1: Pressure Mounted Installation

This method is ideal for doorways and hallways where drilling is not desired. Ensure the surface is flat and stable.

1. Insert the tension bolts into the four corners of the gate.
2. Position the gate in the desired opening.
3. Rotate the tension bolts to tighten them against the walls until the gate is secure.
4. Check the visual indicator: it should turn green, confirming proper pressure and secure installation.
5. Once secure, carefully cut off the zip-tie.

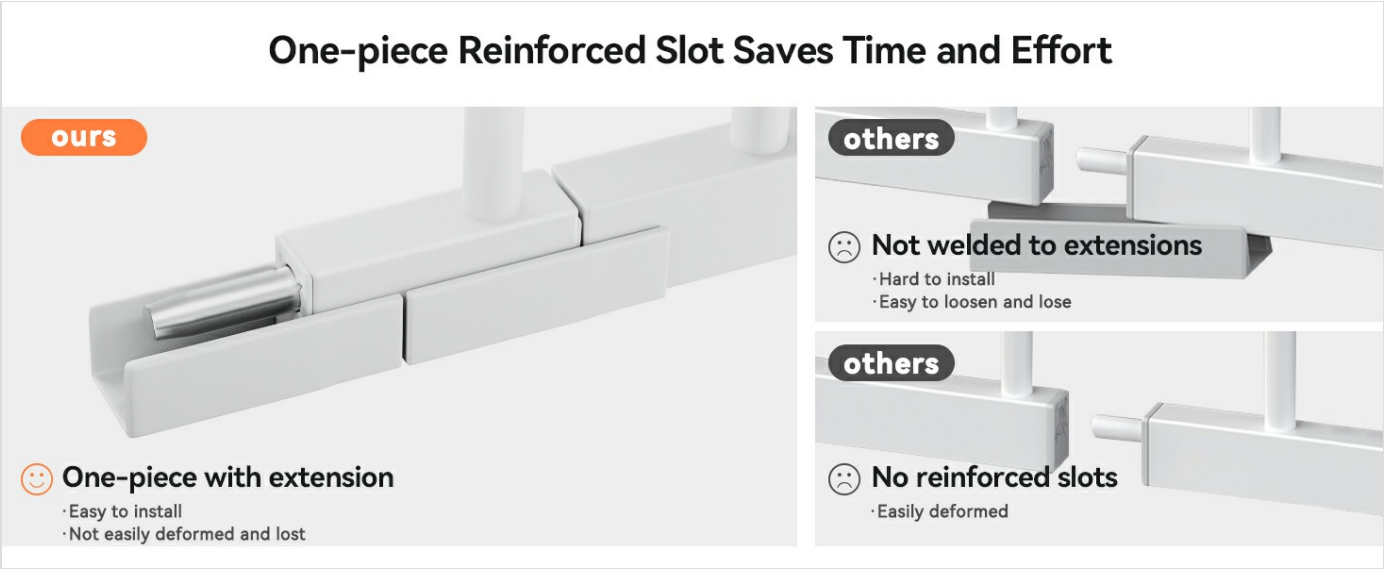


Figure 4: Pressure Mounted Installation steps.

For stair railings with non-flat surfaces (rhombic, round, or square columns), use the provided Y-shape tension bolts.



Figure 5: Gate installation on different stair banister types using Y-shape tension bolts.

Method 2: Hardware Mounted Installation

For extra stability, especially at the top of stairs, hardware mounting is recommended.

1. Locate and mark four points for drilling on the wall or banister.
2. Drill holes at the marked points. Insert the dry wall anchors (if applicable) and fix the wall cups with screws.
3. Attach the gate to the installed wall cups.
4. Check the visual indicator: it should turn green, confirming secure installation.
5. Once secure, carefully cut off the zip-tie.

Also Suitable for Special Stair Banister

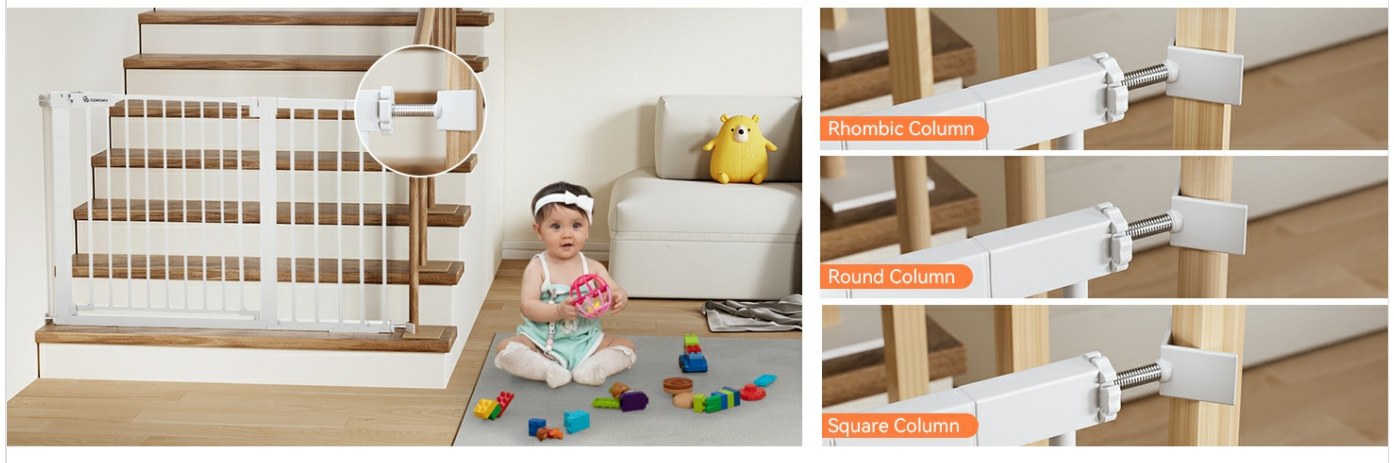


Figure 6: Hardware Mounted Installation steps.

OPERATING INSTRUCTIONS

Dual Locking Mechanism

The gate features a dual-locking mechanism for enhanced safety, requiring two actions to open.

1. **Lock 1:** Push the top button down.
2. **Lock 2:** Simultaneously lift the gate handle.
3. Once both locks are disengaged, the door can be opened.

Double Locking for Double Protection

More safety for kids, Parents feel at ease

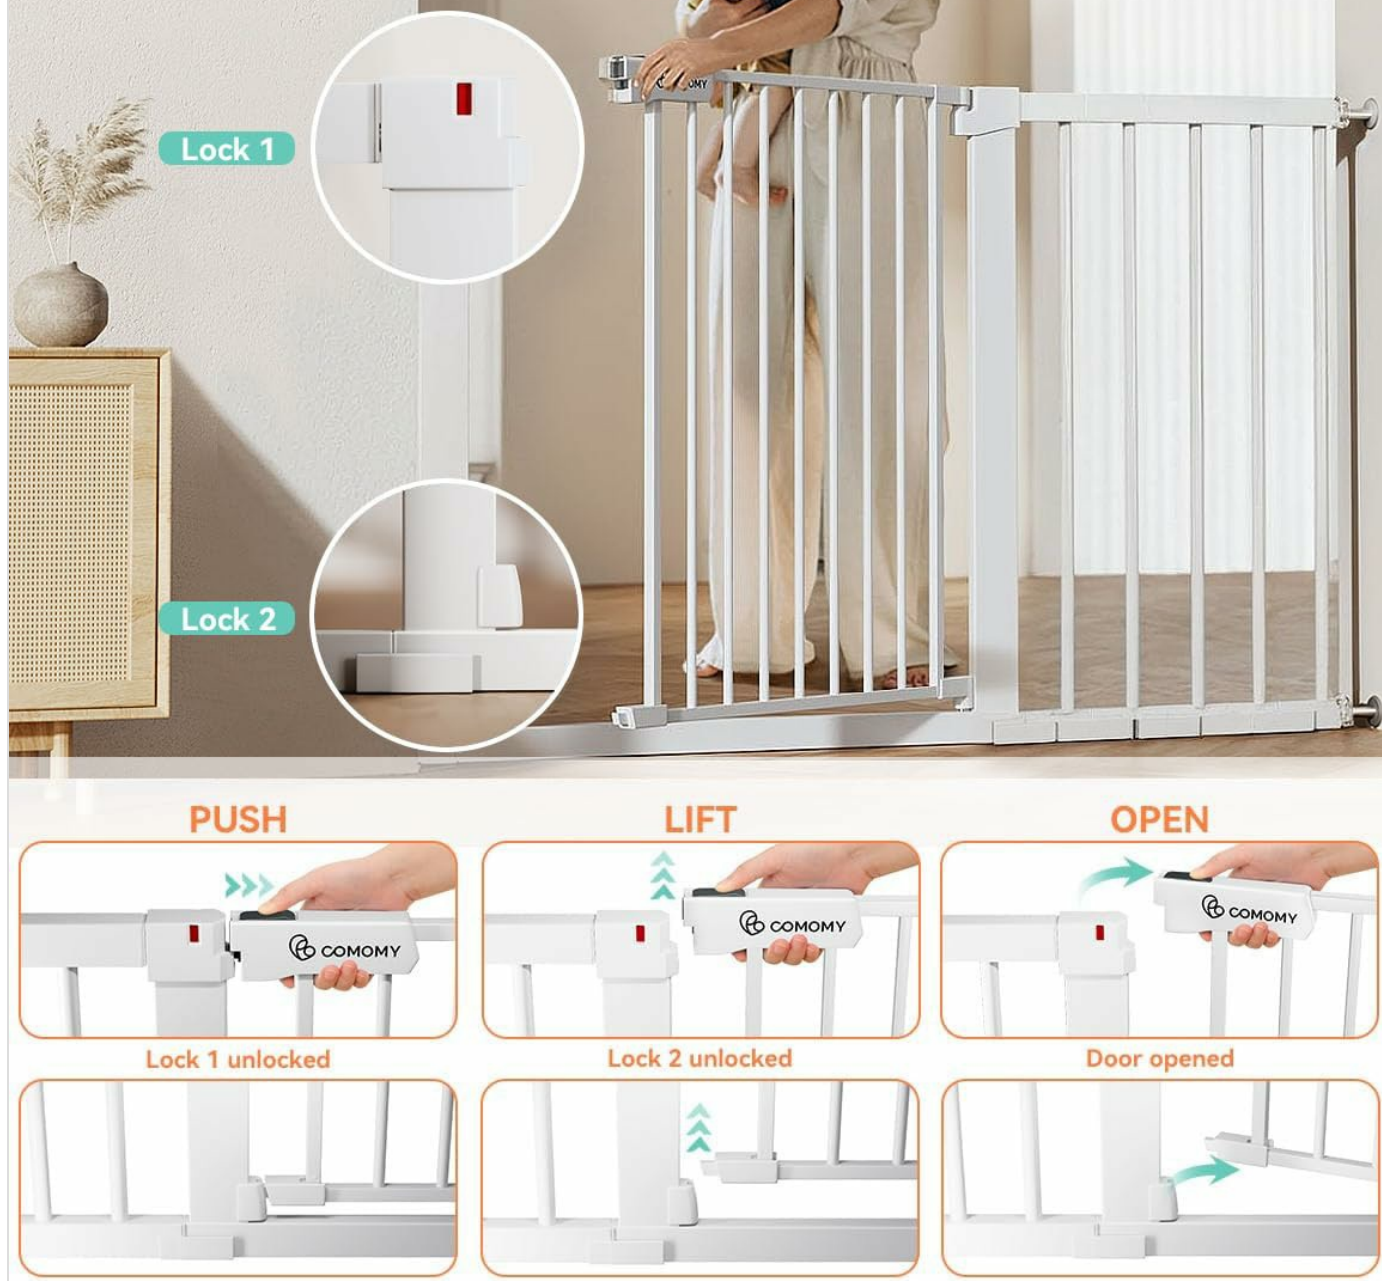


Figure 7: Dual Locking Mechanism for secure operation.

Dual Direction Opening & Auto-Close

The gate door swings open in both directions for convenience. It also features an auto-close function.

- The gate will automatically close when the opening angle is less than 90 degrees.

- To keep the gate open, swing it past 90 degrees, and it will remain in the open position.
- The anti-pinch hinges are designed to prevent accidental pinching during operation.



Figure 8: Dual Direction Opening and Auto-Close functionality.

Watch this video for a demonstration of the gate's operation and features:

Your browser does not support the video tag.

Video 1: Demonstration of the COMOMY baby gate's features, including opening, closing, and overall use.

MAINTENANCE

- **Cleaning:** Wipe the gate with a damp cloth and mild soap. Do not use abrasive cleaners or harsh chemicals.
- **Regular Checks:** Periodically inspect all parts for wear, damage, or loose connections. Ensure all bolts are tightened and the gate operates smoothly.
- **Tension Adjustment:** The red/green visual indicator on the gate serves as a reminder to adjust the tension bolts. If the indicator shows red, tighten the bolts until it turns green, ensuring the gate remains securely mounted.

Visual & Precise Secure Indicators

Worry-free installation, Danger forewarning for safe use



GREEN
Perfectly
Locked



RED
Not Securely
Locked

Figure 9: Visual Secure Indicators for tension monitoring.

TROUBLESHOOTING

Problem	Solution
---------	----------

Problem	Solution
Gate does not close automatically.	Ensure the gate is installed level and the opening angle is less than 90 degrees. Check for obstructions.
Gate feels loose or wobbly.	Tighten all tension bolts. Check the visual indicator; if red, adjust until green. For hardware mounted gates, ensure screws are tight.
Visual indicator shows red after tightening.	Continue tightening the tension bolts. If the issue persists, re-evaluate the installation area for proper fit and stability.
Gate is difficult to open/close.	Ensure the dual-locking mechanism is being operated correctly (push down top button, then lift handle). Check for any debris in the latch mechanism.

SPECIFICATIONS

- **Brand:** COMOMY
- **Model:** YG-39W
- **Material:** Metal
- **Height:** 30 inches
- **Width Range:** 29.5 inches to 46 inches
- **Mounting Type:** Pressure Mounted / Hardware Mounted
- **Features:** Auto-close, Dual Locking, Dual Direction Opening, Anti-Pinch Hinges, Secure Indicators
- **Item Weight:** Approximately 14.62 pounds
- **UPC:** 810139100072, 714855324272

WARRANTY AND SUPPORT

For warranty information, product support, or to purchase replacement parts, please contact COMOMY customer service. Refer to the product packaging or the official COMOMY website for contact details.

Manufacturer: COMOMY

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question