

Optex RC-20U

Optex RC-20U 3 Channel Receiver Chimebox with Relay User Manual

1. INTRODUCTION

The Optex RC-20U 3 Channel Receiver Chimebox with Relay is designed to enhance your Optex Wireless 2000 and 1000 systems by providing audible alerts for perimeter breaches. This receiver can differentiate between up to nine transmitters, categorizing them into three distinct groups, each with a unique chime tone. It also features a Form C relay for integration with other devices.

Key Features:

- Accepts up to 9 transmitters, identifying each group of 3 with a different chime tone.
- Operates with an included 9VDC adapter.
- Designed for versatile wall-mount or table-mount installation.
- Includes a Form C relay for activating external devices (50V AC 1A max. or 24V DC 1A max.).

2. PACKAGE CONTENTS

Please verify that all items are present and in good condition upon opening the package:

- Optex RC-20U Receiver Chimebox
- 9VDC Power Adapter



Image: The Optex RC-20U Receiver Chimebox, a white rectangular unit with an antenna and speaker grille, shown alongside its white 9VDC power adapter.

3. SETUP

3.1 Powering the Unit

1. Connect the small barrel connector of the 9VDC power adapter to the power input jack on the Optex RC-20U receiver.
2. Plug the 9VDC power adapter into a standard electrical outlet. The receiver will power on, indicated by an LED light (if present).

3.2 Mounting the Receiver

The RC-20U receiver can be placed on a flat surface or mounted on a wall.

- **Table-Mount:** Place the receiver on a stable, flat surface in a central location within range of your

transmitters. Ensure it is not obstructed by large metal objects.

- **Wall-Mount:** Use appropriate screws (not included) to secure the receiver to a wall. Refer to the receiver's back panel for keyhole slots. Ensure the antenna is oriented for optimal signal reception.

3.3 Pairing Transmitters

The RC-20U receiver can be paired with up to nine Optex wireless transmitters, organized into three groups of three, each triggering a unique chime tone. Refer to your specific Optex transmitter's manual for its pairing mode instructions.

1. Ensure the RC-20U receiver is powered on.
2. Locate the programming button or switch on the RC-20U receiver (consult the device for exact location, often a small button or dip switch).
3. Activate the pairing mode on the RC-20U receiver according to its specific instructions (e.g., press and hold a button until an indicator light flashes).
4. Within the pairing window, activate the desired transmitter (e.g., trigger its sensor). The receiver should acknowledge the pairing with a beep or flash.
5. Repeat for additional transmitters. The receiver will automatically assign transmitters to groups and their corresponding chime tones as they are paired.
6. Test each paired transmitter to confirm it triggers the correct chime tone on the receiver.

4. OPERATING INSTRUCTIONS

4.1 Chime Tones

When a paired transmitter detects activity, the RC-20U receiver will emit an audible chime. The receiver distinguishes between three groups of transmitters, each assigned a unique chime tone. This allows users to identify which area or zone has been triggered without needing to visually check the unit.

4.2 Relay Function

The RC-20U features a Form C relay output, which can be used to activate external devices such as lights, sirens, or other security systems. This relay activates when any paired transmitter triggers the receiver.

- **Connection:** Connect the relay output terminals on the RC-20U to the input terminals of the external device. Ensure correct polarity and voltage requirements.
- **Specifications:** The relay supports a maximum of 50V AC at 1A or 24V DC at 1A. Do not exceed these ratings to prevent damage to the receiver or connected equipment.
- **Configuration:** Consult the RC-20U's specific wiring diagram and the external device's manual for detailed connection and configuration instructions.

5. MAINTENANCE

To ensure optimal performance and longevity of your Optex RC-20U receiver, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the receiver with a soft, dry cloth. Do not use abrasive cleaners, solvents, or harsh chemicals, as these can damage the casing.
- **Environment:** Keep the receiver in a dry environment, away from direct sunlight, extreme temperatures, and high humidity.

- **Power Supply:** Only use the provided 9VDC power adapter or a compatible replacement specified by Optex.
- **Antenna:** Ensure the antenna is not bent or damaged, as this can affect wireless reception.

6. TROUBLESHOOTING

If you encounter issues with your RC-20U receiver, refer to the following table for common problems and solutions:

Problem	Possible Cause	Solution
Receiver does not power on.	Power adapter not connected or faulty; power outlet not active.	Ensure power adapter is securely plugged into receiver and a working outlet. Test outlet with another device.
No chime when transmitter is triggered.	Transmitter not paired; transmitter out of range; low battery in transmitter; interference.	Verify transmitter is paired (Section 3.3). Move receiver closer to transmitter. Check transmitter battery. Reduce potential sources of interference (e.g., large metal objects, other wireless devices).
Chime tone is incorrect for a specific zone.	Transmitter paired to the wrong group.	Re-pair the transmitter, ensuring it is assigned to the desired group during the pairing process.
Relay does not activate.	Incorrect wiring; external device fault; relay overloaded.	Check relay wiring (Section 4.2). Verify external device is functional. Ensure relay load does not exceed 50V AC 1A or 24V DC 1A.
Short detection range.	Obstructions; antenna position; environmental factors.	Relocate receiver or transmitter to minimize obstructions. Adjust antenna for optimal reception. Consider environmental factors like thick walls or metal structures.

7. SPECIFICATIONS





Feature	Detail
Model Number	RC-20U
Brand	Optex
Power Input	9VDC (adapter included)
Transmitter Capacity	Up to 9 transmitters (3 groups of 3)
Chime Tones	3 distinct tones for different groups
Relay Output	Form C, 50V AC 1A max. or 24V DC 1A max.
Mounting Options	Wall-mount or Table-mount
Dimensions (approx.)	8.3 x 4.3 x 2.5 inches



Feature	Detail
Weight (approx.)	12 ounces

8. WARRANTY AND SUPPORT


For warranty information, technical support, or service inquiries regarding your Optex RC-20U receiver, please refer to the documentation provided with your purchase or visit the official Optex website. Keep your proof of purchase for warranty claims.

Related Documents - RC-20U

	<p>OPTEX iVISION+ Wireless Video Intercom User Manual</p> <p>User manual for the OPTEX iVISION+ wireless video intercom system, covering features, setup, operation, settings, troubleshooting, and FAQs. Learn how to install, use, and maintain your wireless video intercom.</p>
	<p>OPTEX OVS-02GT Virtual Loop Surface Mount Vehicle Detection Sensor Installation Instructions</p> <p>Comprehensive installation instructions for the OPTEX OVS-02GT Virtual Loop surface mount vehicle detection sensor. Learn about its microwave technology, app-based settings, installation procedures, and troubleshooting for gate systems.</p>
	<p>OVS-02GT Sensor Programming Quick Start Guide for Android</p> <p>Step-by-step guide to programming the Optex OVS-02GT sensor using the Android Virtual Loop app, including calibration and application settings.</p>
	<p>OPTEX AP-360B(C) PIR Detector Installation Instructions</p> <p>Comprehensive installation guide for the OPTEX AP-360B(C) 360° Wired Indoor Recessed Mount PIR Detector, covering setup, wiring, specifications, and troubleshooting.</p>

 <p>Optex SMDC-16 Programming Manual</p> <p>A comprehensive programming manual for the Optex SMDC-16 Digital Control Communicator and SMPC-32 Personal Control. It details system configuration, zone setup, receiver options, system features, report codes, and downloading procedures.</p>	<p>Optex SMDC-16 Programming Manual</p> <p>A comprehensive programming manual for the Optex SMDC-16 Digital Control Communicator and SMPC-32 Personal Control. It details system configuration, zone setup, receiver options, system features, report codes, and downloading procedures.</p>
 <p>Optex OVS-02GT Virtual Loop Installation Instructions</p> <p>Comprehensive installation guide for the OPTEX OVS-02GT Virtual Loop vehicle detection sensor, covering setup, configuration, and troubleshooting.</p>	<p>OPTEX OVS-02GT Virtual Loop Installation Instructions</p> <p>Comprehensive installation guide for the OPTEX OVS-02GT Virtual Loop vehicle detection sensor, covering setup, configuration, and troubleshooting.</p>

Documents - Optex – RC-20U

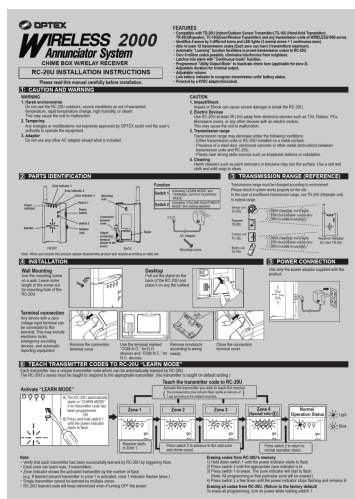

[\[pdf\]](#) User Manual Instructions


RC 20U IM p1 Black A4 200110 INSTALLATION INSTRUCTIONS Low battery indicator to 2000

Transmission range must be changed according environment Please check if system works properly for the site In case of insufficient transmission use TR Repeater unit rctd20u manual knowledgebase absoluteautomation documents usr optex |||

2000 CHIME BOX W/RELAY RECEIVER **RC-20U** INSTALLATION INSTRUCTIONS

Please read this manual carefully before installation. FEATURES Compatible with TD-20U Indoor/Outdoor Sensor Transmitter ,TS-10U Hand-Held Transmitter , TR-20U Repeater , TC-10U Door/Window Transmitter and any transmission units of...

lang:en **score:44** filesize: 1.89 M page_count: 2 document date: 2010-04-06

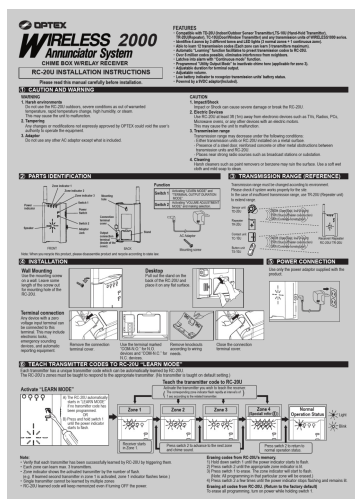

[\[pdf\]](#) User Manual Instructions

RC 20U IM p1 Black A4 200110 optex rc 20u manual Optex RCTD Series Wireless 2000 PIR Motion Detector System gatedepot amfile file 51956 product 34482 |||

2000 CHIME BOX W/RELAY RECEIVER **RC-20U** INSTALLATION INSTRUCTIONS

Please read this manual carefully before installation. FEATURES Compatible with TD-20U Indoor/Outdoor Sensor Transmitter ,TS-10U Hand-Held Transmitter , TR-20U Repeater , TC-10U Door/Window Transmitter and any transmission units of...

lang:en **score:43** filesize: 1.66 M page_count: 2 document date: 2020-03-29



[\[pdf\]](#) User Manual Accessories

optex wireless 2000 manualshopactiondirect content manuals manual |||


RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive... lang:en score:39 filesize: 677.26 K page_count: 4 document date: 2020-10-22



[\[pdf\]](#) User Manual Accessories

optex wireless 2000 manual t 1606344469 sep yimg ty cdn yhst 16416632405890

RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive... lang:en score:35 filesize: 677.26 K page_count: 4 document date: 2020-10-22

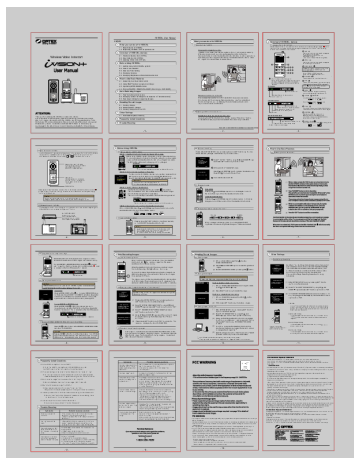


[\[pdf\]](#) User Manual

iVISION FIX USER MANUAL 20121115 ai me10 Users Manual Optex Co Ltd IVP GU Wireless Gateway DC9IVP DC9IVPGU ivp gu

Wireless Video Intercom Thank you for purchasing the iVISION wireless video intercom. Due to the na ... iVISION with an optional unit Operate third party equipment e.g. Door Lock Connecting the OPTEX **RC-20U** to the iVISION enables Open Door function to operate third party equipment connected to th...

lang:en score:32 filesize: 838.58 K page_count: 1 document date: 2014-08-23

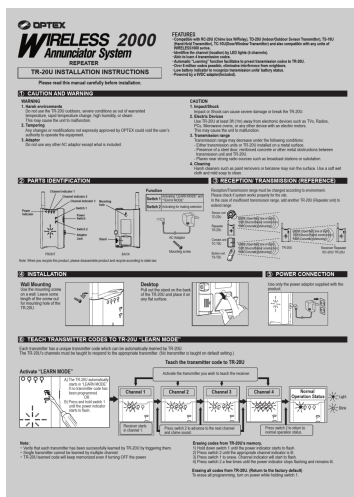

[\[pdf\]](#) User Manual Instructions

TR 20U IM p1 Black A4 090210 INSTALLATION INSTRUCTIONS Controlled Products 2000 Reception Transmission range must be changed according to environment Please check if system works properly for the site In case of insufficient transmission add another Repeater unit The receiver taught this transmitter code before use Refer s manual details 1 Preparation 5 Verification 2 Activate TEACH MODE OPERATION CHART teaching 3 Select channel you wish teach Installation Manual cdn controlledproducts docs www

2000 REPEATER TR-20U INSTALLATION INSTRUCTIONS Please read this manual carefully before installation. FEATURES Compatible with **RC-20U** Chime box W/Relay , TD-20U Indoor/Outdoor Sensor Transmitter , TS-10U Hand-Held Transmitter , TC-10U Door/Window Transmitter and also compatible with any units o...

lang:en score:31 filesize: 1.86 M page_count: 2 document date: 2010-04-06



[pdf] Specifications Accessories

BE AWARE SECURE RC 20U sdilink SpecsSheet |||


RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive... lang:en score:30 filesize: 668.25 K page_count: 4 document date: 2018-02-28



[pdf] Accessories

RC 20U Literature cdn controlledproducts docs www TR

RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive... lang:en score:30 filesize: 668.27 K page_count: 4 document date: 2019-03-22

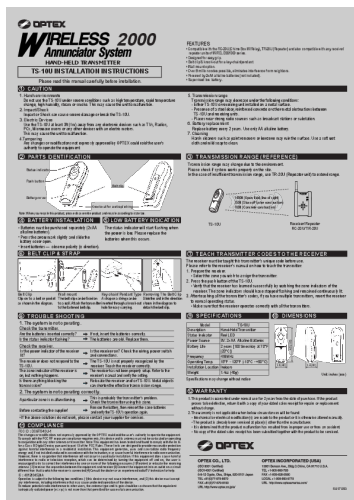

[pdf] User Manual Instructions


New TS 10U IM Black A4 310310 Installation InstructionsOptex Push Button Wireless Transmitter 700 RangeOP TS10U Instructionscdn adiglobaldistribution us pim Original 10059 OP Instructions ||| 2000 HAND-HELD TRANSMITTER TS-10U INSTALLATION INSTRUCTIONS Please read this manual carefully befor ... nt. 2 PARTS IDENTIFICATION Status indicator Push button Belt clip FEATURES Compatible with the **RC-20U** Chime Box W/Relay , TR-20U Repeater and also compatible with any receiver/ repeater units ... lang:en score:28 filesize: 1.51 M page_count: 1 document date: 2020-03-29



[pdf] Accessories Borchure

optex rctd 20u brochure Optex RCTD Series Wireless 2000 PIR Motion Detector System gatedepot amfile
file 51954 product 34482 |||

RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive...
lang:en score:26 filesize: 677.26 K page_count: 4 document date: 2020-03-29

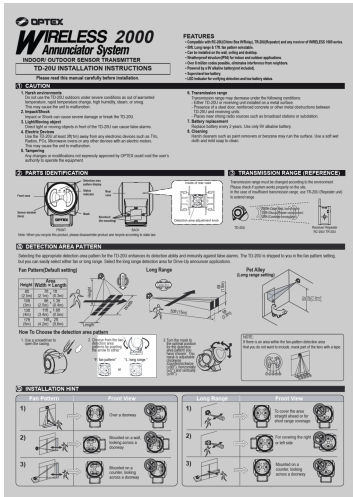

[pdf] User Manual Instructions

TD 20U IM p1 Black A4 150110 LR INSTALLATION INSTRUCTIONS 1 2 3 3Transmission range may decrease under the following conditions Either or receiving unit installed on a metal surface 5m Area Width x LengthDownloadFilegrouponenw Attachment DownloadFile Id 3546 |||


2000 INDOOR/ OUTDOOR SENSOR TRANSMITTER TD-20U INSTALLATION INSTRUCTIONS Please read this manual car ... roved by OPTEX could void the user s authority to operate the equipment. FEATURES Compatible with **RC-20U** Chime Box W/Relay , TR-20U Repeater and any receiver of WIRELESS 1000 series. 50ft. Long ra...
lang:en score:26 filesize: 2.41 M page_count: 2 document date: 2010-04-06



[pdf] Accessories

Rctd 20u Wireless System RCTD 20U WIRELESS SYSTEM BE AWARE SECURE Driveway Entry Announcer The 2000 from OPTEX is a wireless annunciator system that not only alerts businesses Optex sales kyllinks net kysec |||


RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive...
lang:en score:25 filesize: 668.27 K page_count: 4 document date: 2018-08-16

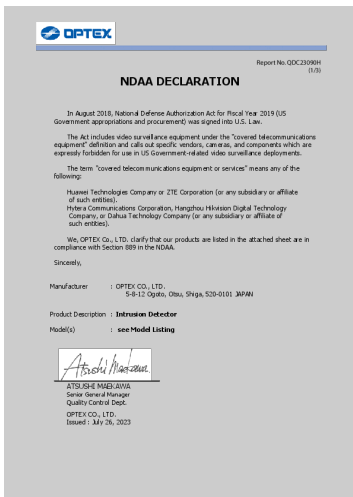

[pdf] Decleration of Conformity Catalog

Masanori Oochi OPTEX National Defense Authorization Act Declaration SIP 5030 REDWALL America Optex QDC23090 NDA Declaration optex america sfo2 digitaloceanspaces catalogues |||


NDA Declaration Report No. QDC23090H 1/3 In August 2018, National Defense Authorization Act for ... X-802N C MX-40PIC OAM-EXPLORER US OMV-VX601 OV-301CB G OV-301S QXI-DT-X5 QXI-R QXI-RDT-X5 QXI-ST **RC-20U** RCTD-20U RLS-2020A RLS-2020I RLS-2020S RLS-2020V RLS-3060L RLS-3060SH RLS-3060V RLS-50100V RX...
lang:en score:24 filesize: 302.7 K page_count: 3 document date: 2023-07-27

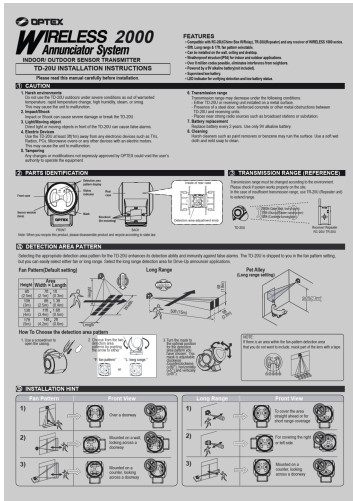

[pdf] User Manual Instructions

TD 20U IM p1 Black A4 150110 LR 2000 FEATURES Compatible with RC Chime Box W Relay The receiver must be taught this transmitter code before use Refer to the s manual for details 1 Preparation Press swit ch of untill power indicator starts sflash ing switch 2 select zone you wish assign sensor Activation av ey ou rhnd if tTD g V erity ha c v h Installation Manual cdn controlledproducts docs www 2000 INDOOR/ OUTDOOR SENSOR TRANSMITTER TD-20U INSTALLATION INSTRUCTIONS Please read this manual car ... roved by OPTEX could void the user s authority to operate the equipment. FEATURES Compatible with **RC-20U** Chime Box W/Relay , TR-20U Repeater and any receiver of WIRELESS 1000 series. 50ft. Long ra...


lang:en score:23 filesize: 2.41 M page_count: 2 document date: 2010-04-06

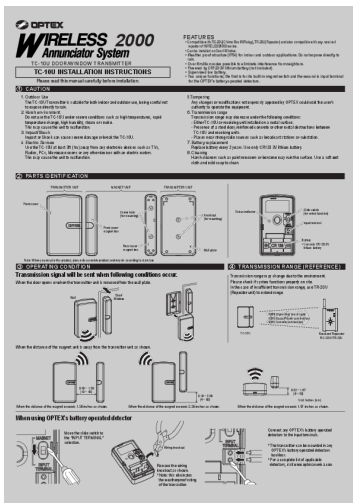

[pdf] User Manual Instructions

TD 20U IM p1 Black A4 291209 Gate Depot prieš 1 dieną — FCC ID DC9TC 10U The changes or modifications not expressly approved by the OPTEX could void user s authority to operate equipment To comply with optex tc 10u manual gatedepot amfile file 51987 product 34414 ||| 2000 TC-10U DOOR/WINDOW TRANSMITTER TC-10U INSTALLATION INSTRUCTIONS Please read this manual careful ... devices with an electric motors. This may cause the unit to malfunction. FEATURES Compatible with **RC-20U** Chime Box W/Relay , TR-20U Repeater and also compatible with any receiver/ repeater of WIREL...

lang:en score:22 filesize: 1.52 M page_count: 2 document date: 2020-03-29

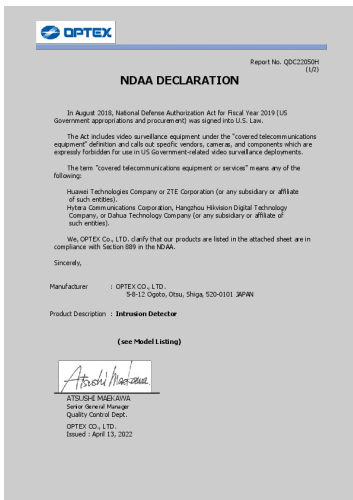

[pdf] Decleration of Conformity Catalog

QDC22050 NDA Declaration Masanori Oochi QDC20039 optex america sfo2 digitaloceanspaces catalogues |||

NDA Declaration Report No. QDC22050H 1/2 In August 2018, National Defense Authorization Act for ... LAC-1 LX-402 C LX-802N C MX-40PIC OMV-VX601 OV-301CB G OV-301S QXI-DT-X5 QXI-R QXI-RDT-X5 QXI-ST **RC-20U** RCTD-20U RLS-2020I RLS-2020S RLS-3060L RLS-3060SH RLS-3060V RLS-50100V RX-40PI C SIP-100 SI...

lang:en score:22 filesize: 326.22 K page_count: 2 document date: 2022-04-19




[pdf] Datasheet Accessories

Click to ViewOptex TC 10U Wireless Door Contact for the RCTD SeriesOptex Data Sheetalldataresource assets Optex Sheet Product SheetClick 20U 2000 Indoor Outdoor Annunciator SystemOptex SeriesUpload OP RCTD20U ProductManualOptex Sheetcdn adiglobaldistribution us pim Original 10056 Upload ProductManualalldataresource datasheet ENProduct ViewKOA Electronics Distribution LLCOptex Seriesgpvoh8vgvfad2zrldzd3Upload Sheetimages salsify image upload s 2JGV v5f gpvoh8vgvfad2zrldzd3cdn SheetProduct Battery Powered Window and Transmitter 20UOptex ProductManualUpload TC10U ProductManualcdn ViewClick TD Long Range In CS191534gpvoh8vgvfad2zrldzd3Upload SheetOptex ||| RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive... lang:en score:22 filesize: 691.76 K page_count: 4 document date: 2019-10-18

[pdf] Decleration of Conformity Catalog

Masanori Oochi NDAA DECLARATIONWe OPTEX Co LTD clarify that our products are listed in the attached sheet compliance with Section 889 Sincerely ManufacturerAOP SIP 5030 Zertifikat ENi alarmssysteme at media 09 21 f0 1749715641 AOP EN ts 1749803192 National Defense Authorization Act DeclarationNDAA DECLARATIONRCTD 20U Optex AmericaWe ManufacturerQDC23090 DECLARATIONAOP ENoptex america sfo2 digitaloceanspaces catalogues QDC23090 DECLARATION asset 265071 url1 ||| ||| NDAA DECLARATION Report No. QDC23090H 1/3 In August 2018, National Defense Authorization Act for Fiscal Year 2019 US Government appropriations and procurement was signed into U.S. Law. The Act includes video surveillance equipment under the NDAA DECLARATION Report No. QDC23090H 1/3 In August 2018, National Defense Authorization Act for ... X-802N C MX-40PIC OAM-EXPLORER US OMV-VX601 OV-301CB G OV-301S QXI-DT-X5 QXI-R QXI-RDT-X5 QXI-ST **RC-20U** RCTD-20U RLS-2020A RLS-2020I RLS-2020S RLS-2020V RLS-3060L RLS-3060SH RLS-3060V RLS-50100V RX... lang:en score:20 filesize: 302.7 K page_count: 3 document date: 2023-07-27

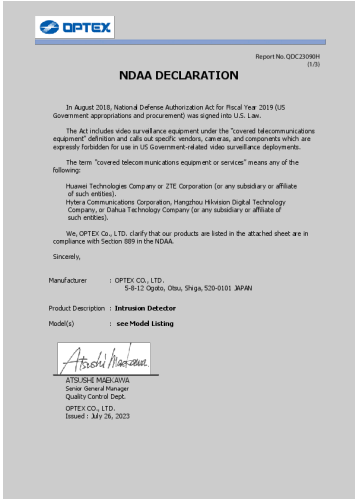

[pdf] Accessories

PD496612 objects eanixter BI m , , . rk - , _ : _ J ; - 7* _ _ -,2 _ aw 5-A / - . - -1uwuuwt The OPTEX Wireless 2000 monitors your property 24 hours a day to detect approaching vehicles and people, giving you time to prepare .YrKlblb -.- V .Q9Q **RC-20U** / _ / / I g=1 EX W ... lang:en score:19 filesize: 734.02 K page_count: 4 document date: 2017-07-24



[pdf] Accessories

PD487307 objects eanixter

Bl m , , . rk - -, _ : _ J ; - 7* _ - -, -2 _ aw 5-A /- . - - -1uwuuwt The OPTEX Wireless 2000 monitors your property 24 hours a day to detect approaching vehicles and people, giving you time to prepare .YrKlblb -.-- V .Q9Q **RC-20U** l/_ / / l g=1 EX W ... lang:en score:19 filesize: 734.02 K page_count: 4 document date: 2017-06-16



[pdf] Accessories

BE AWARE SECURE RCTD 20U silmarelectronics |||


RCTD-20U WIRELESS SYSTEM Wireless Driveway Entry Announcer BE AWARE, BE SECURE. The Wireless 2000 ... ES The OPTEX Wireless 2000 serves as a welcome chime or perimeter alert for your home or business. **RC-20U** The Wireless 2000 includes an outdoor rated wireless PIR detector, as well as an R.F. receive... lang:en score:19 filesize: 691.76 K page_count: 4 document date: 2019-10-18



[pdf] Specifications Accessories

IVP GU2 announcement Specification Sheets Wireless Recvr Handheld Xmtr Kit for use w iVision OPT IVPGU2 sesonline media wysiwyg products |||

Temporary Replacement Solution Announcement Dear Valued Distributors: We at OPTEX are currently in t ... ts to control entry remotely. Temporary Part Number: IVP-GU2 Description: One box consisting of 1 **RC-20U** Receiver unit with Relay Output and 1 TS-10U Hand Held Push Button Transmitter. This will f... lang:en score:17 filesize: 1.3 M page_count: 1 document date: 2018-12-18

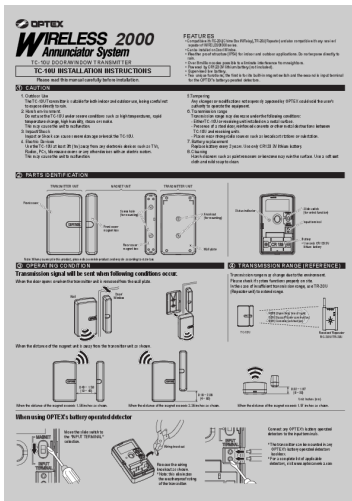

[\[pdf\]](#) User Manual Instructions Specifications

TD 20U IM p1 Black A4 291209 TC 10U sdiilink Specs sheet

2000 TC-10U DOOR/WINDOW TRANSMITTER TC-10U INSTALLATION


INSTRUCTIONS Please read this manual careful ... devices with an electric motors.

This may cause the unit to malfunction. FEATURES Compatible with **RC-20U** Chime

Box W/Relay , TR-20U Repeater and also compatible with any receiver/ repeater of

WIREL...

lang:en **score:17** filesize: 1.74 M page_count: 2 document date: 2010-04-06

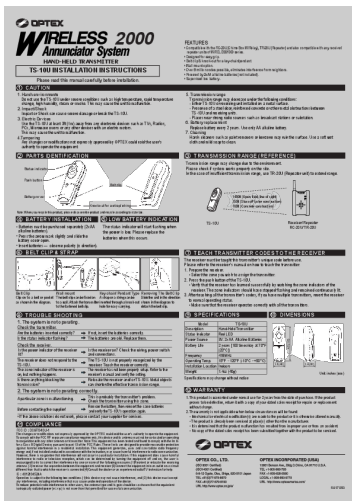

[\[pdf\]](#) User Manual Instructions Specifications

New TS 10U IM Black A4 310310 sdiilink Specs sheet |||


2000 HAND-HELD TRANSMITTER TS-10U INSTALLATION INSTRUCTIONS Please

read this manual carefully befor ... nt. 2 PARTS IDENTIFICATION Status indicator

Push button Belt clip FEATURES Compatible with the **RC-20U** Chime Box W/Relay ,

TR-20U Repeater and also compatible with any receiver/ repeater units ...

lang:en **score:16** filesize: 1.52 M page_count: 1 document date: 2010-04-08

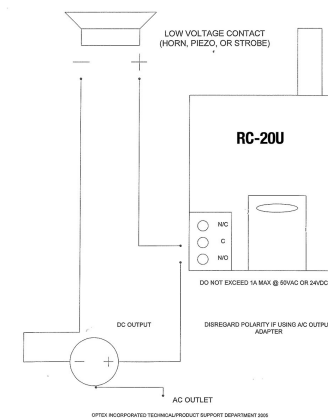

[\[pdf\]](#) Diagram

optex rc 20u relay wiring diagram Optex RCTD Series Wireless 2000 PIR Motion Detector System

gatedepot amfile file 51950 product 34482 |||

...

lang:en **score:15** filesize: 99.46 K page_count: 1 document date: 2020-04-17

[illegible]

[\[pdf\]](#)

Ivan Mosquera Lista de precios FEBRERO 2021 ADISES COMENTARIOS Model Description P List
CATEGORY 1 INDOOR DETECTORS INCLUYE % POR TEMA NOM CX 502 50 39 X Commercial PIR
6 X80 with CL 80N Lens While Supplies Last will be replaced by CDX Series \$ 91 56 AM 30 x 40 Wide
Angle Hardwired Anti masking New! LP OPTEX AGOSTO 2020 adises mx media |||

Lista de precios FEBRERO 2021 COMENTARIOS Model CATEGORY 1 INCLUYE POR TEMA NOM CX-502 INCLUY ... RLS-RB RLS-SB SIP-HU SIP-MIDIHOOD SIP-MINIHOOD SIP-PMBR SR-MPLT CATEGORY 4 INCLUYE POR TEMA NOM **RC-20U** INCLUYE POR TEMA NOM RCTD-20U INCLUYE POR TEMA NOM TC-10U INCLUYE POR TEMA NOM TD-20U I...

lang:en score:15 filesize: 697.72 K page_count: 5 document date: 2021-06-09