

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

> [GGStudy](#) /

> [GGStudy 6319H-Black Matte Black Vessel Bathroom Faucet Instruction Manual](#)

## GGStudy 6319H-Black

# GGStudy 6319H-Black Matte Black Vessel Bathroom Faucet Instruction Manual

Model: 6319H-Black

## 1. PRODUCT OVERVIEW

---

The GGStudy 6319H-Black is a single-handle, one-hole bathroom vessel sink faucet designed for above-counter basin installations. It features a matte black finish, a 360-degree swivel spout, and a durable brass construction. This faucet includes a matching pop-up drain without overflow and hot & cold water supply lines.

- **Finish:** Matte Black
- **Spout:** 360° Swivel for enhanced flexibility
- **Handle:** Single-handle design for easy control of water temperature and flow
- **Cartridge:** Smooth, long-lasting, drip-free ceramic disc cartridge
- **Material:** High-quality brass construction for durability and corrosion resistance
- **Flow Rate:** 1.19 Gallons Per Minute (GPM)



Image 1: Detailed view of the faucet highlighting the aerator spout, ceramic valve core, multi-layer piano painting plating, and high-quality brass construction.

## 2. SETUP AND INSTALLATION

---

Before beginning installation, ensure all necessary components are present and that your sink meets the specified requirements.

### 2.1 Pre-Installation Requirements

- **Sink Hole Diameter:** 1.3 inches (minimum) to 1.77 inches (maximum)
- **Maximum Counter Thickness:** 2.28 inches
- **Mounting Type:** Single hole deck mount for vessel sinks

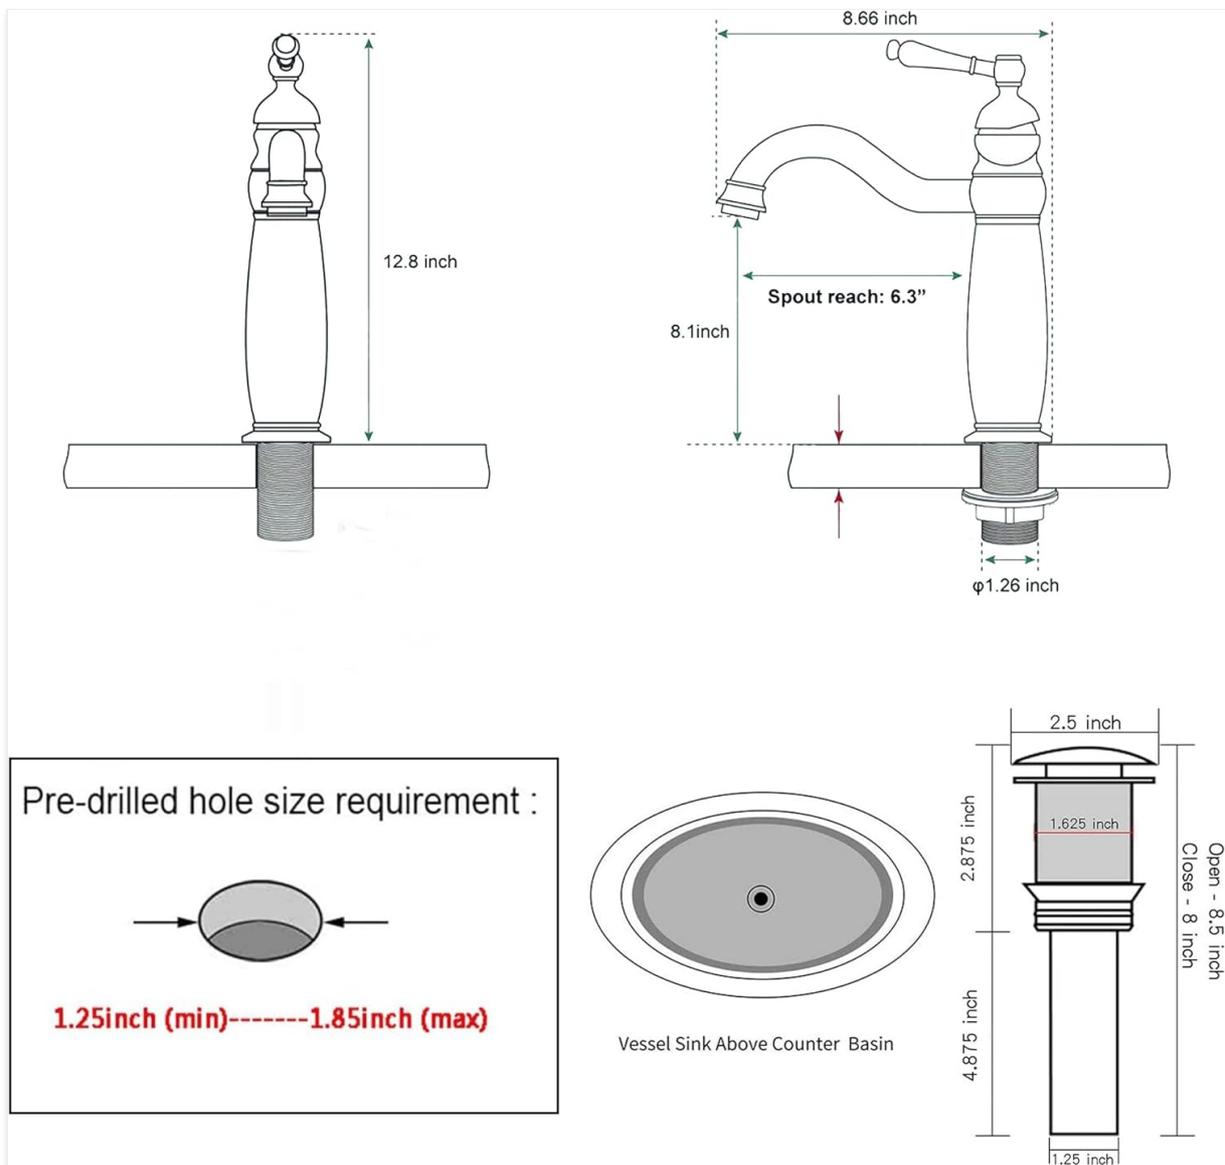


Image 2: Diagram illustrating faucet dimensions and the required sink hole size for installation.

## 2.2 Included Components

- Faucet Body
- Pop Up Drain (without overflow)
- Hot & Cold Water Supply Lines
- Mounting Hardware (fixing nut, o-shape rubber washer, screw cap)

Image 3: Exploded view of the faucet showing individual components and a simplified installation diagram.

## 2.3 Installation Steps (General)

1. Ensure the sink hole diameter is within the specified range (1.3"-1.77").
2. Place the faucet body through the sink hole, ensuring the O-ring is correctly positioned.
3. Secure the faucet from underneath the counter using the mounting hardware (fixing nut, washer, screw cap).
4. Connect the hot and cold water supply lines to the corresponding inlets on the faucet and to your water supply.
5. Install the pop-up drain into the sink basin.
6. Test for leaks and ensure proper water flow and temperature control.

### 3. OPERATING INSTRUCTIONS

The GGStudy vessel faucet is designed for simple and efficient operation.

- **Water Flow Control:** Lift the single handle to turn on the water and control the flow rate. Push down to turn off.
- **Temperature Control:** Move the handle left for hot water and right for cold water. The handle features hot (red) and cold (blue) indicators for easy identification.
- **Spout Rotation:** The faucet spout can rotate 360 degrees, allowing for flexible use and easy access to all areas of the sink.



Image 5: Illustration of the single-handle operation for controlling water flow and temperature.



Image 6: Visual representation of the faucet's 360-degree swivel capability.

## 4. MAINTENANCE

---

Regular cleaning and maintenance will ensure the longevity and optimal performance of your faucet.

- **Cleaning:** Clean the faucet regularly with a soft cloth and mild soap. Avoid using abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the matte black finish.
- **Water Spots:** To prevent water spots, wipe the faucet dry after each use.
- **Aerator Maintenance:** Periodically unscrew and clean the aerator (located at the tip of the spout) to remove any mineral buildup or debris that may affect water flow.



Image 7: Features of the honeycomb aerator, including anti-spray, soft and comfortable flow, and effective water saving.

## 5. TROUBLESHOOTING

---

If you encounter any issues with your faucet, refer to the common troubleshooting tips below.

- **Low Water Flow:** Check if the aerator is clogged with debris or mineral deposits. Clean or replace the aerator if necessary. Ensure both hot and cold water supply valves are fully open.

- **Leaks from Faucet Base:** Verify that all mounting hardware is securely tightened. Check the O-rings and gaskets for proper seating and damage.
- **Dripping Faucet:** A dripping faucet usually indicates an issue with the ceramic disc cartridge. While the faucet uses a drip-free cartridge, if dripping occurs, ensure it is properly installed or consider replacing it if damaged.
- **Water Temperature Issues:** Ensure both hot and cold water supply lines are connected correctly and that the water heater is functioning properly.

## 6. SPECIFICATIONS

---

<b>Brand</b>	GGStudy
<b>Model Name</b>	6319H-Black
<b>Material</b>	Brass (Faucet Body), Zinc (Handle)
<b>Finish Type</b>	Matte Black
<b>Mounting Type</b>	Deck Mount
<b>Hole Count</b>	1
<b>Number of Handles</b>	1
<b>Maximum Flow Rate</b>	1.19 Gallons Per Minute
<b>Spout Height</b>	12.6 Inches
<b>Spout Reach</b>	5.5 Inches
<b>Item Weight</b>	3.5 pounds

## 7. WARRANTY AND SUPPORT

---

This GGStudy faucet comes with a **Lifetime Warranty**, ensuring peace of mind regarding its quality and durability. For technical support, warranty claims, or any other inquiries, please contact GGStudy customer service through their official website or the retailer where the product was purchased.