

[Manuals.plus](#) /

› [Votamuta](#) /

› Votamuta Vo-63-FMH7Z-DY Antique Brass Widespread Bathroom Faucet Instruction Manual

Votamuta Vo-63-FMH7Z-DY

Votamuta Vo-63-FMH7Z-DY Antique Brass Widespread Bathroom Faucet Instruction Manual

Model: Vo-63-FMH7Z-DY

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Votamuta Vo-63-FMH7Z-DY Antique Brass Widespread Bathroom Faucet. Please read these instructions carefully before installation and retain them for future reference. Proper installation and care will ensure optimal performance and longevity of your faucet.

WHAT'S IN THE BOX

Verify that all components are present before beginning installation:

- Bathroom Faucet (Main Spout and Two Handles)
- Overflow Pop Up Drain
- Two Water Supply Lines
- Quick Connect Hose



High Quality Filtered Bubbler

The follicular device can make the water and air mix to make the water flow smooth and save water



Soft Water



No Splash



Water-saving

Image: All components included in the package, featuring the faucet, pop-up drain, and supply lines.

SPECIFICATIONS

Feature	Detail
Brand	Votamuta
Model Number	Vo-63-FMH7Z-DY
Faucet Type	Widespread Bathroom Sink Faucet
Mounting Type	Deck Mount, 3 Hole
Finish Type	Antique Brass
Material	Solid Brass (Body & Handles), Ceramic (Valve)
Number of Handles	2 (Cross Handles)
Valve Type	Ceramic Cartridge Valve

Flow Rate	1.2 Gallons Per Minute (GPM)
Spout Height	8 Inches (203mm)
Spout Reach	8 Inches (203mm)
Hose Length	24 Inches
Special Features	360° Swivel Spout, Lead-Free, Pop Up Drain Included

DIMENSION

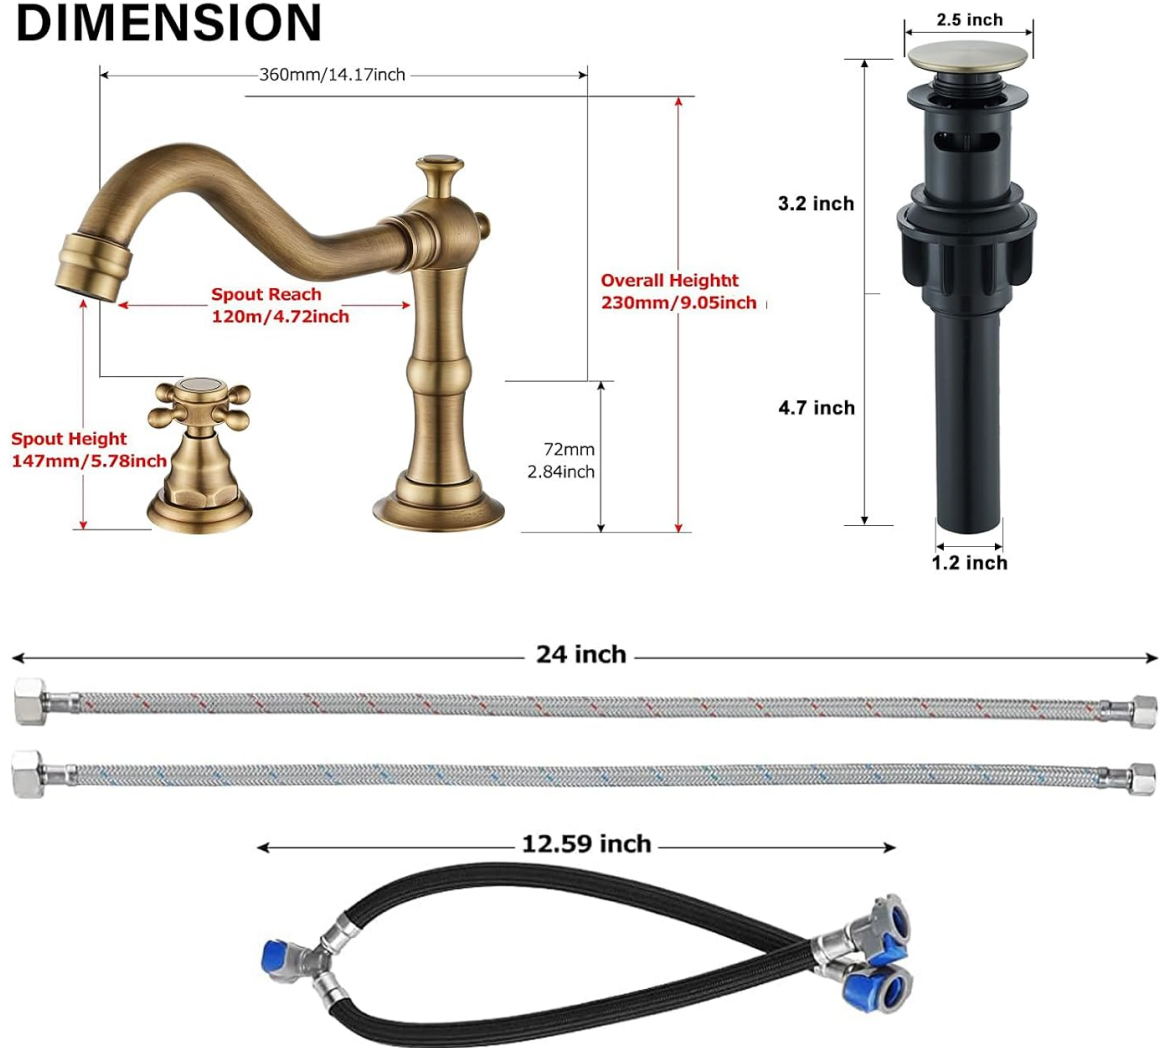


Image: Technical drawing showing the dimensions of the faucet, handles, and pop-up drain.

SETUP AND INSTALLATION

- This widespread sink faucet is designed for 3-hole installations with adjustable centers ranging from 8 to 16 inches. The package includes all necessary components for a straightforward installation.
- 1. Prepare the Sink:** Ensure your sink has three holes with a center-to-center distance suitable for a widespread faucet (6-12 inches is optimal). Clean the area around the faucet holes.
 - 2. Install Handles:** Insert the hot and cold water handles into the outer holes of the sink. Secure them from

underneath with the provided washers and nuts.

3. **Install Spout:** Place the main spout into the center hole. Secure it from underneath using the mounting hardware.
4. **Connect Water Lines:** Connect the pre-installed water pipes from the handles to the main spout using the quick-connect hose. Ensure connections are tight to prevent leaks.
5. **Connect Supply Lines:** Attach the two water supply lines (included) to the hot and cold water inlets of the handles. Connect the other ends to your home's hot and cold water supply valves.
6. **Install Pop-Up Drain:** Follow the instructions provided with the overflow pop-up drain for installation into your sink's drain hole. Ensure a watertight seal.
7. **Test for Leaks:** Once all connections are made, slowly turn on the water supply and check for any leaks. Tighten connections as needed.

Child-friendly

Soft Water Flow.

Bubbler effectively prevents water splashing.

Dual handles for simple control of water temperature.

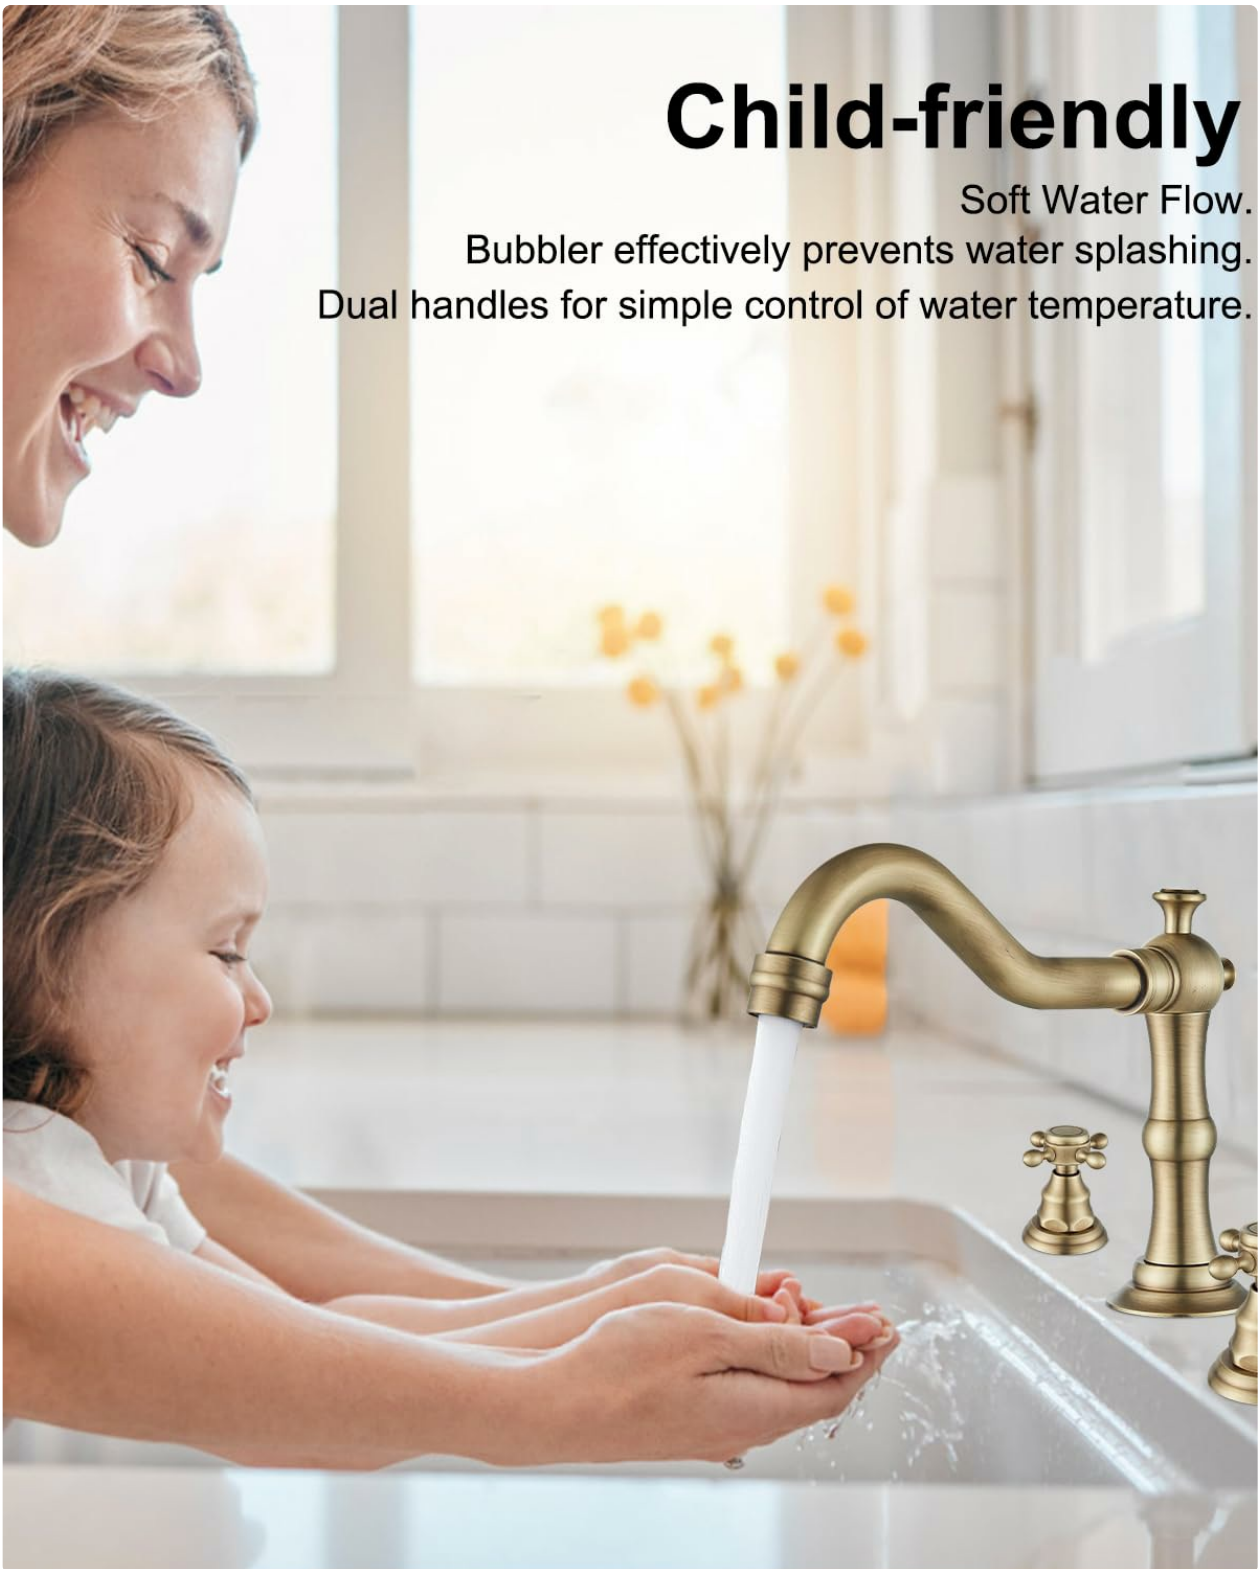


Image: Illustration demonstrating suitable 3-hole sink configurations for the faucet, with optimal installation between 6-10 inches.

HAVE FUN DIY IN 15 MINUTES

Pre-installed water pipes and
quick-connect design

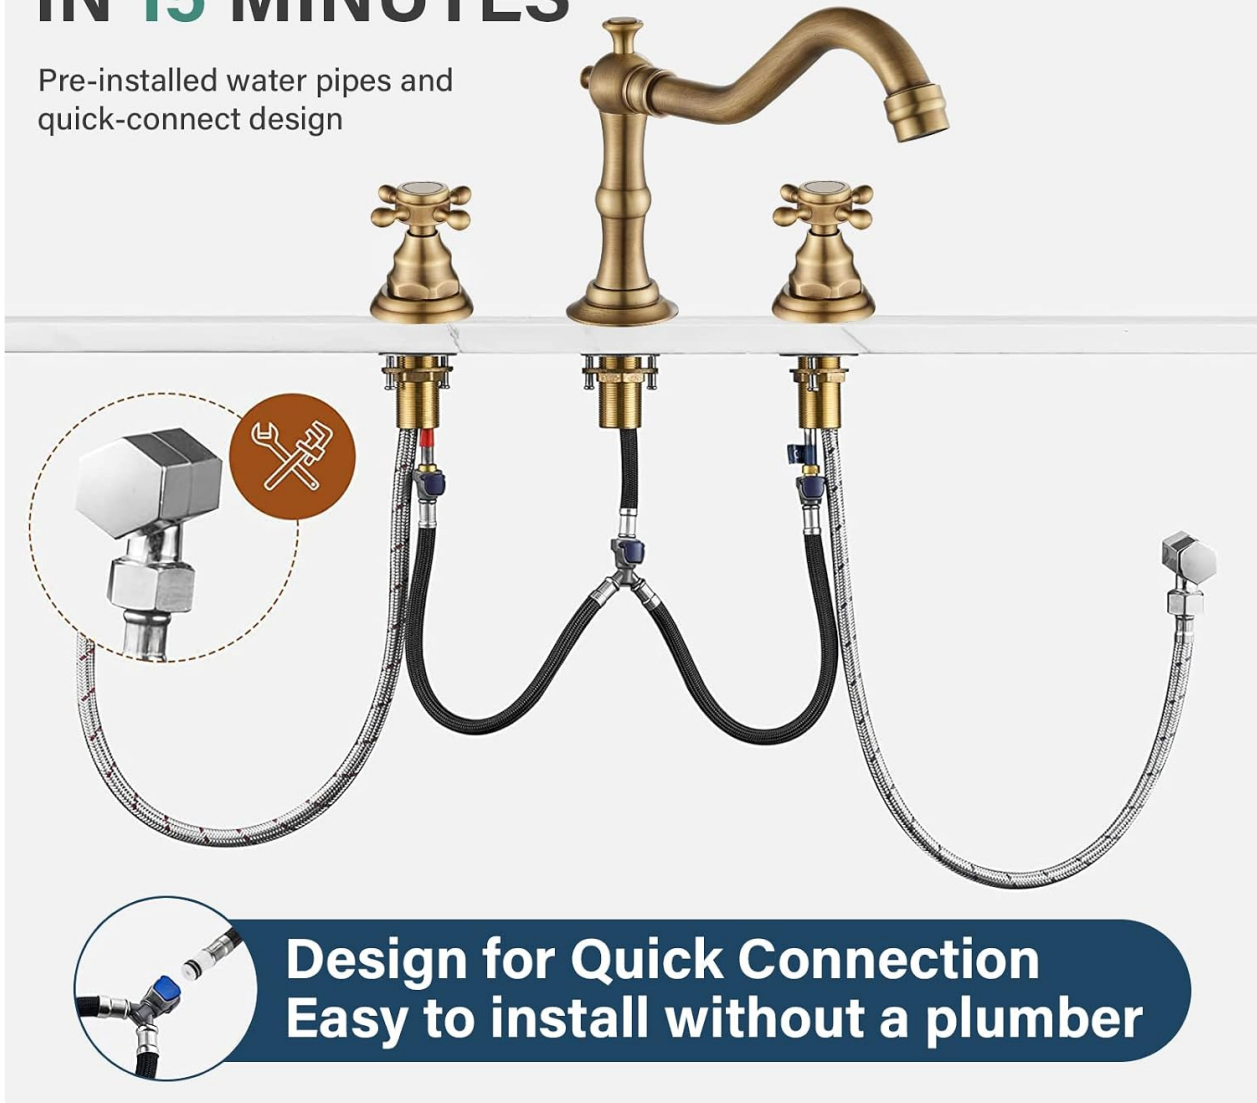


Image: Diagram illustrating the quick-connect design for water pipes, simplifying the installation process.

OPERATING INSTRUCTIONS

Your Votamuta faucet features two cross handles for precise control over water temperature and flow.

- **Water Flow Control:** Turn the handles clockwise or counter-clockwise to open or close the water flow.
- **Temperature Adjustment:** The left handle controls hot water, and the right handle controls cold water. Adjust both handles simultaneously to achieve your desired water temperature.
- **Smooth Water Flow:** The integrated aerator ensures a dense, soft water flow without splashing, contributing to water conservation.
- **Swivel Spout:** The faucet spout can swivel 360 degrees, providing flexibility for various sink tasks.

PASSED 600,000+ CYCLE TESTING

Copper + Ceramic Combination Material.

Smooth
87%

Avoid leakage
75%

Stability
65%



Image: A child washing hands under the faucet, demonstrating the soft water flow and ease of use with dual handles.

INCLUDE ABS POP-UP DRAIN & cUPC Certified Supply Lines



Image: Close-up of the faucet's bubbler, highlighting its ability to produce soft, splash-free, and water-saving flow.

MAINTENANCE

Regular maintenance will help preserve the finish and functionality of your Votamuta faucet.

- **Cleaning the Finish:** The multi-layer antique brass surface is designed to be anti-rust and anti-discoloration. Clean with a soft, damp cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- **Aerator Cleaning:** The faucet features a detachable aerator inside the spout. If water flow becomes restricted, unscrew the aerator and clean any mineral deposits or debris. Rinse thoroughly and reattach.
- **Ceramic Cartridge:** The faucet is equipped with a durable ceramic disc cartridge, tested for 500,000 open and close cycles, ensuring long-term, drip-free performance. No regular maintenance is typically required for the cartridge itself.



Image: Graphic illustrating the faucet's performance in cycle testing, highlighting smoothness, leakage prevention, and stability.

TROUBLESHOOTING

If you encounter issues with your faucet, refer to the following common troubleshooting steps:

- **Low Water Flow:**
 - Check if the water supply valves under the sink are fully open.
 - Clean the aerator for mineral buildup or debris (refer to Maintenance section).
 - Inspect the supply lines for kinks or obstructions.

- **Leaking from Spout:**

- Ensure handles are fully closed.
- If persistent, the ceramic cartridge may need inspection or replacement. Contact support if necessary.

- **Leaking from Base of Faucet:**

- Check the tightness of the mounting nuts under the sink.
- Ensure all water connections are securely tightened.

- **Difficulty Adjusting Temperature:**

- Verify that both hot and cold water supply lines are connected correctly and that both supply valves are open.

WARRANTY INFORMATION

Specific warranty details for the Votamuta Vo-63-FMH7Z-DY faucet are not provided in the product information. Please refer to the manufacturer's official website or contact their customer service for comprehensive warranty terms and conditions.

SUPPORT

For further assistance, technical support, or replacement parts, please contact Votamuta customer service. Contact information can typically be found on the manufacturer's official website or on the product packaging.