

## Luxor HE38-B

# Luxor 2 Shelf Utility Cart Model HE38-B Instruction Manual

This manual provides detailed instructions for the assembly, operation, and maintenance of your Luxor 2 Shelf Utility Cart, Model HE38-B. Please read thoroughly before use.

## 1. SAFETY INFORMATION

Please observe the following safety guidelines to ensure safe operation and prevent damage to the product or injury to yourself.

- **Weight Capacity:** Do not exceed the maximum weight capacity of 400 lbs (evenly distributed). Overloading can cause structural failure and potential injury.
- **Assembly:** Ensure all components are securely assembled before use. Improper assembly can lead to instability.
- **Casters:** Always engage the locking brakes on the casters when the cart needs to remain stationary to prevent unintended movement.
- **Surface:** Use the cart on flat, stable surfaces. Avoid uneven terrain or inclines that could cause the cart to tip.
- **Proposition 65 Warning:** This product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.

## 2. PACKAGE CONTENTS

Verify that all components are present before beginning assembly. If any parts are missing or damaged, please contact Luxor customer support.

- Top Shelf (1)
- Bottom Shelf (1)
- Legs (4)
- 4-inch Swivel Casters (4) - *Two with locking brakes*

## 3. ASSEMBLY INSTRUCTIONS

Assembly of the Luxor 2 Shelf Utility Cart requires a rubber mallet (not included).

1. **Attach Legs to Bottom Shelf:** Carefully align the four legs with the designated slots on the underside of the bottom shelf. Ensure the leg with the integrated handle slot is positioned correctly if you intend to use the handle on the top shelf. Use a rubber mallet to gently tap each leg into place until fully seated. The fit is designed to be snug for stability.
2. **Insert Casters:** Insert the stem of each caster into the bottom of each leg. Push firmly until the casters click into place. Ensure the two casters with locking brakes are positioned on the same side for easier access.
3. **Attach Top Shelf:** Align the top shelf with the upper ends of the four legs. Ensure the ergonomic push handle is facing the desired direction. Use a rubber mallet to gently tap the top shelf onto the legs until it is fully seated and secure.
4. **Final Check:** Verify that all legs and shelves are securely connected and that the casters rotate freely.



Figure 1: Key components of the Luxor Utility Cart, including the ergonomic push handle, durable thermoplastic resin construction, and 4-inch swivel casters with locking brakes.



*Figure 2: The fully assembled Luxor 2 Shelf Utility Cart, ready for use.*

## 4. OPERATING INSTRUCTIONS

---

The Luxor 2 Shelf Utility Cart is designed for versatile use in various environments.

- **Loading the Cart:** Place items evenly distributed across the shelves. The 0.25-inch retaining lip helps secure items during transport. Do not concentrate heavy loads in one area.
- **Moving the Cart:** Use the ergonomic push handle molded into the top shelf to maneuver the cart. Ensure the locking brakes are disengaged before moving.
- **Securing the Cart:** To keep the cart stationary, push down on the levers of the two locking casters until they are engaged. To release, lift the levers.

## 5. MAINTENANCE

---

Regular maintenance will prolong the life and functionality of your utility cart.

- **Cleaning:** Wipe down the thermoplastic resin shelves and legs with a damp cloth and mild detergent. Avoid abrasive cleaners that could damage the surface. The material is designed not to stain, scratch, dent, or rust.

- **Caster Inspection:** Periodically check the casters for debris (hair, lint, etc.) that may impede movement. Clean as necessary. Ensure casters are securely attached.
- **Structural Check:** Occasionally inspect all connections to ensure they remain tight and secure.

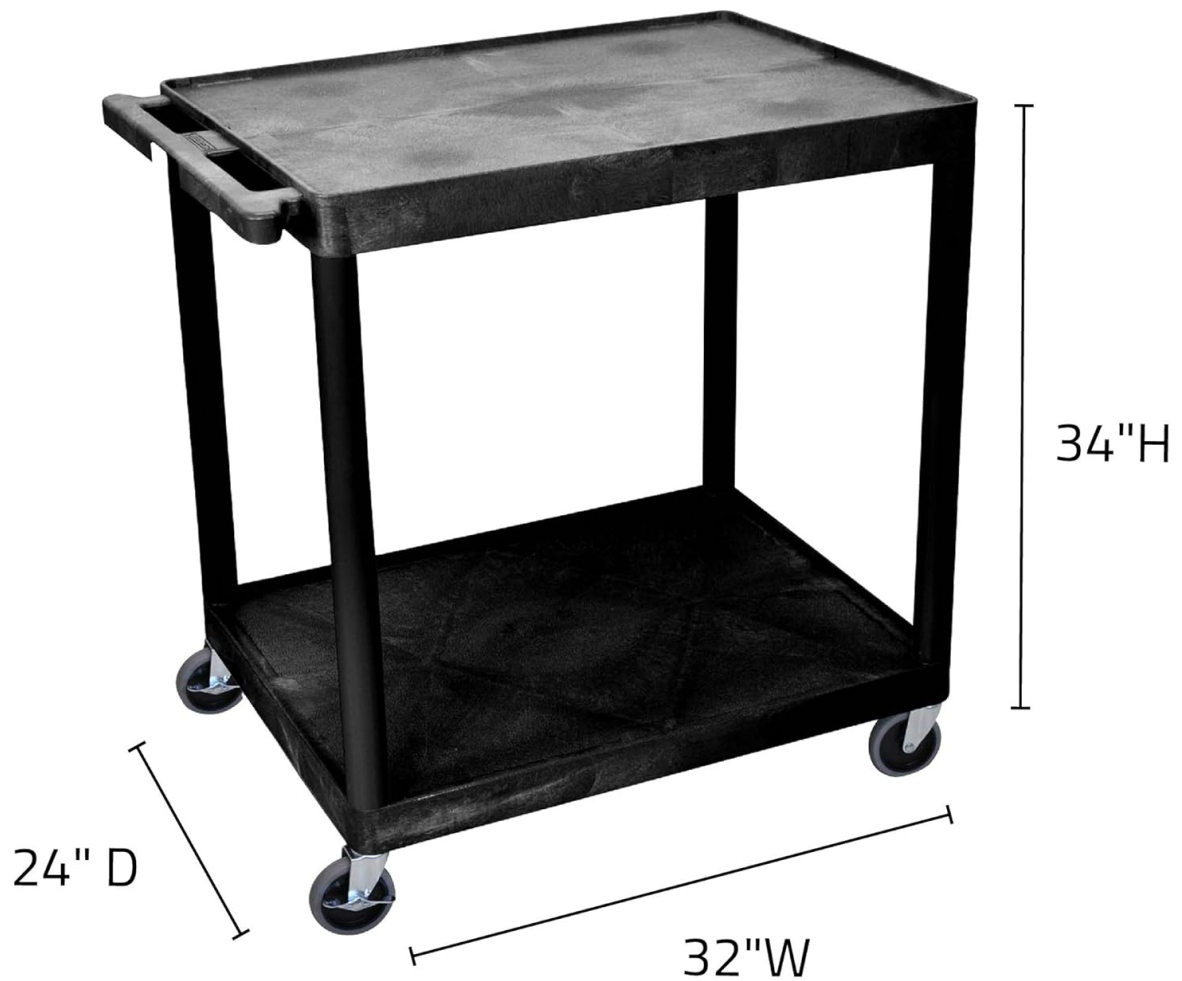
## 6. TROUBLESHOOTING

If you encounter issues with your utility cart, refer to the following common solutions.

- **Difficulty Assembling Legs/Shelves:** The connections are designed for a tight fit. Ensure proper alignment and use a rubber mallet to gently tap components into place. Do not use excessive force or metal hammers, which could cause damage.
- **Cart is Unstable:** Verify that all legs are fully seated into both shelves. Ensure casters are properly inserted. Check that the cart is on a level surface.
- **Casters Not Rolling Smoothly:** Inspect casters for any obstructions like dirt or debris. Clean them thoroughly. Ensure the locking brakes are fully disengaged.
- **Shelves Sagging Under Load:** While the cart has a stated capacity of 400 lbs, ensure the weight is evenly distributed. Concentrated heavy loads in a small area may cause localized sagging. If sagging occurs with loads significantly below the stated capacity, contact customer support.

## 7. SPECIFICATIONS

Feature	Specification
Model Number	HE38-B
Overall Dimensions (W x D x H)	32" x 24" x 34"
Clearance Between Shelves	25"
Shelf Thickness	1.75"
Shelf Retaining Lip	0.25"
Material	Injection-molded thermoplastic resin
Color	Black
Casters	Four 4" swivel casters (two with locking brake)
Maximum Weight Capacity	400 lbs (evenly distributed)
Assembly Required	Yes
Made In	USA



*Figure 3: Dimensional overview of the Luxor 2 Shelf Utility Cart.*

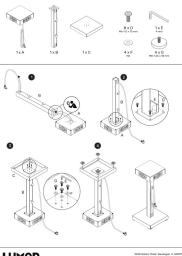





## 8. WARRANTY AND SUPPORT

For warranty information or technical support, please contact Luxor customer service. Details can typically be found on the manufacturer's website or original purchase documentation.

When contacting support, please have your model number (HE38-B) and purchase date available.

**Manufacturer:** Luxor

### Related Documents - HE38-B

 <p>LUXOR</p>	<p><a href="#">Luxor LUXPWR2 Charging Tower Installation Guide</a></p> <p>Step-by-step instructions for assembling the Luxor LUXPWR2 Charging Tower, featuring 8 AC and 8 USB ports.</p>
 <p>LX40BMS189T2</p> <p>KÄYTTÖOHJE BRUKSANVISNING FOR OPERATING INSTRUCTIONS</p> <p>KÄR: TV KÄYTTÖOHJE FÄRGE TV MED FJÄRRKONTROLL COLOUR TELEVISION WITH REMOTE CONTROL</p>	<p><a href="#">LUXOR LX40BMS189T2 Käyttöohje: Televisio-opas</a></p> <p>Löydä kaikki tarvitsemasi tiedot LUXOR LX40BMS189T2 -väritelevisioon käyttöön. Tämä käyttöohje sisältää asennus-, käyttö- ja vianmääritysohjeet.</p>
 <p>LUXOR</p>	<p><a href="#">LUXOR MW-7048-FCG Modular Room Divider Assembly Instructions</a></p> <p>Step-by-step assembly guide for the LUXOR MW-7048-FCG Modular Room Divider Wall System, detailing parts and installation procedures.</p>
 <p>LUXOR</p> <p>LED24HB/DVD</p> <p>BETJENINGSVEJLEDNING OPERATING INSTRUCTIONS BRUKSANVISNING KÄYTTÖOHJE</p> <p>FÄRVE - TV MED FJERNETJENING COLOUR TELEVISION WITH REMOTE CONTROL FÄRGE TV MED FJÄRRKONTROLL FÄRGE TV MED FJÄRRKONTROLL KÄR: TV KÄYTTÖOHJE</p>	<p><a href="#">Luxor LED24HB/DVD Betjeningsvejledning</a></p> <p>Komplet betjeningsvejledning for Luxor LED24HB/DVD LED TV med integreret DVD-afspiller. Dækker installation, funktioner, betjening, medieafspilning, og fejlfinding.</p>
 <p>LUXOR</p> <p>KÄYTTÖOHJE BRUKSANVISNING OPERATING INSTRUCTIONS</p> <p>QLED43 OD870</p>	<p><a href="#">Luxor QLED43 OD870 Operating Instructions</a></p> <p>Comprehensive operating instructions for the Luxor QLED43 OD870 television, covering setup, features, remote control usage, and troubleshooting.</p>
 <p>Modular Wall System User Manual</p>	<p><a href="#">Luxor Modular Wall System User Manual</a></p> <p>Comprehensive user manual for the Luxor Modular Wall System, detailing system understanding, component overview, assembly instructions for starter and add-on walls, cleaning and care, frequently asked questions, and warranty information.</p>

