

Overstock 10'x8' Retractable Patio Awning

VEIKOUS 10'x8' Outdoor Retractable Patio Awning Sun Shade Cover User Manual

Model: 10'x8' Retractable Patio Awning | Brand: Overstock

INTRODUCTION

This manual provides detailed instructions for the safe and effective installation, operation, and maintenance of your VEIKOUS 10'x8' Outdoor Retractable Patio Awning. Please read this manual thoroughly before installation and keep it for future reference.

The VEIKOUS retractable awning is designed to provide shade and UV protection for your patio, balcony, or yard. It features a sturdy aluminum frame and a durable polyester fabric with PU coating, offering water and mildew resistance.

IMPORTANT SAFETY INFORMATION

Please observe the following safety precautions to prevent injury or damage to the product:

- Always ensure the awning is securely fastened to the wall using appropriate hardware for your wall type.
- Do not use the awning in winds exceeding 30 MPH (approximately 48 km/h). Retract the awning during strong winds, heavy rain, or snow to prevent damage.
- Be cautious when operating the hand crank to avoid injury. Ensure no obstructions are in the path of the awning's extension or retraction.
- Keep children and pets away from the awning during operation.
- Regularly inspect the awning for any signs of wear, damage, or loose fasteners. Address any issues promptly.

PRODUCT OVERVIEW



Image: The VEIKOUS 10'x8' Outdoor Retractable Patio Awning providing shade over a patio seating area.

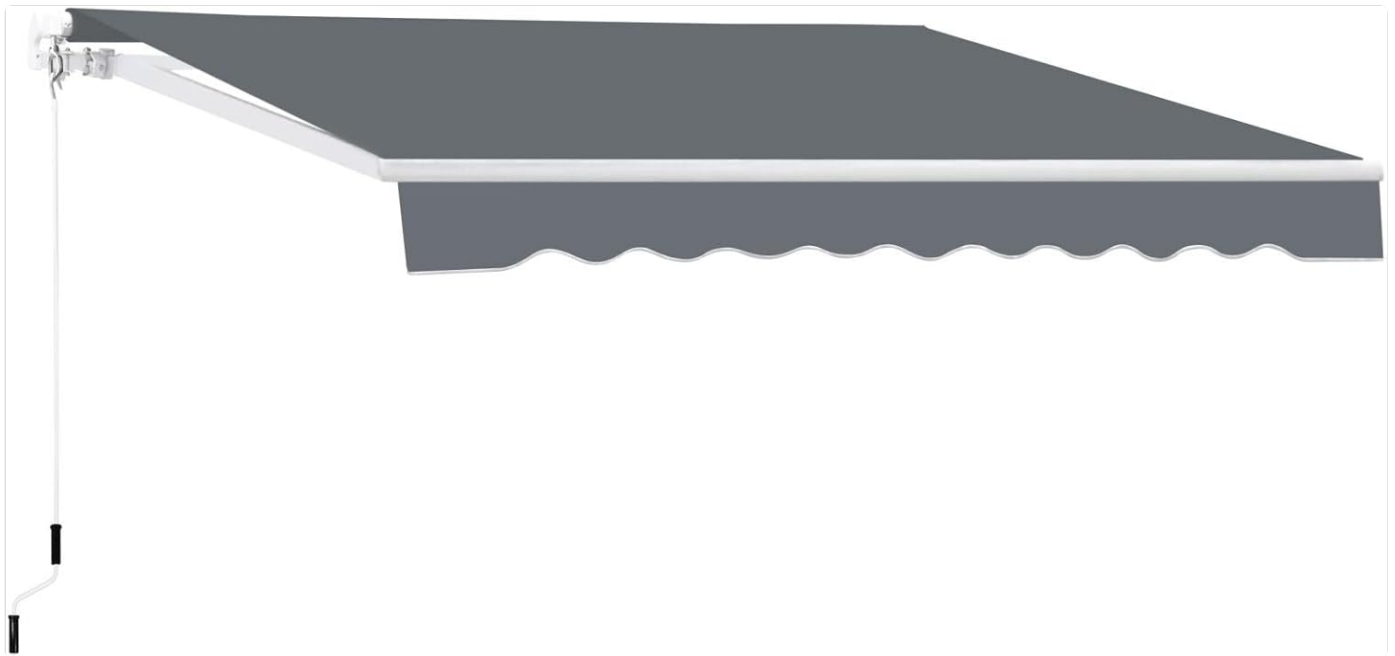


Image: A standalone view of the VEIKOUS 10'x8' Outdoor Retractable Patio Awning, showcasing its grey fabric and white frame.

The VEIKOUS Retractable Patio Awning is designed for outdoor use, offering a flexible shading solution. Its key features include:

- **Retractable Design:** Operated via a hand crank for easy extension and retraction.
- **Durable Construction:** Aluminum frame for sturdiness and corrosion resistance.
- **Weather-Resistant Fabric:** 280g/sq.m polyester fabric with PU coating, resistant to water, mildew, and UV rays.
- **Adjustable Pitch:** The angle of the shade can be adjusted from 0-40° after installation.
- **Dimensions:** 9.8 ft. (W) x 8.2 ft. (L) when fully open, providing approximately 80.36 sq.ft. of coverage.

SETUP AND INSTALLATION

Proper installation is crucial for the awning's stability and longevity. This awning is designed for installation on concrete walls or solid brick walls.

1. Pre-Installation Considerations

- **Minimum Installation Height:** The recommended minimum installation height is 8.2 ft. (2.5 meters).
- **Wall Type:** Ensure your wall is a solid concrete or brick structure capable of supporting the awning's weight and operational forces.
- **Clearance:** Ensure sufficient clearance for the awning to extend and retract without obstruction.

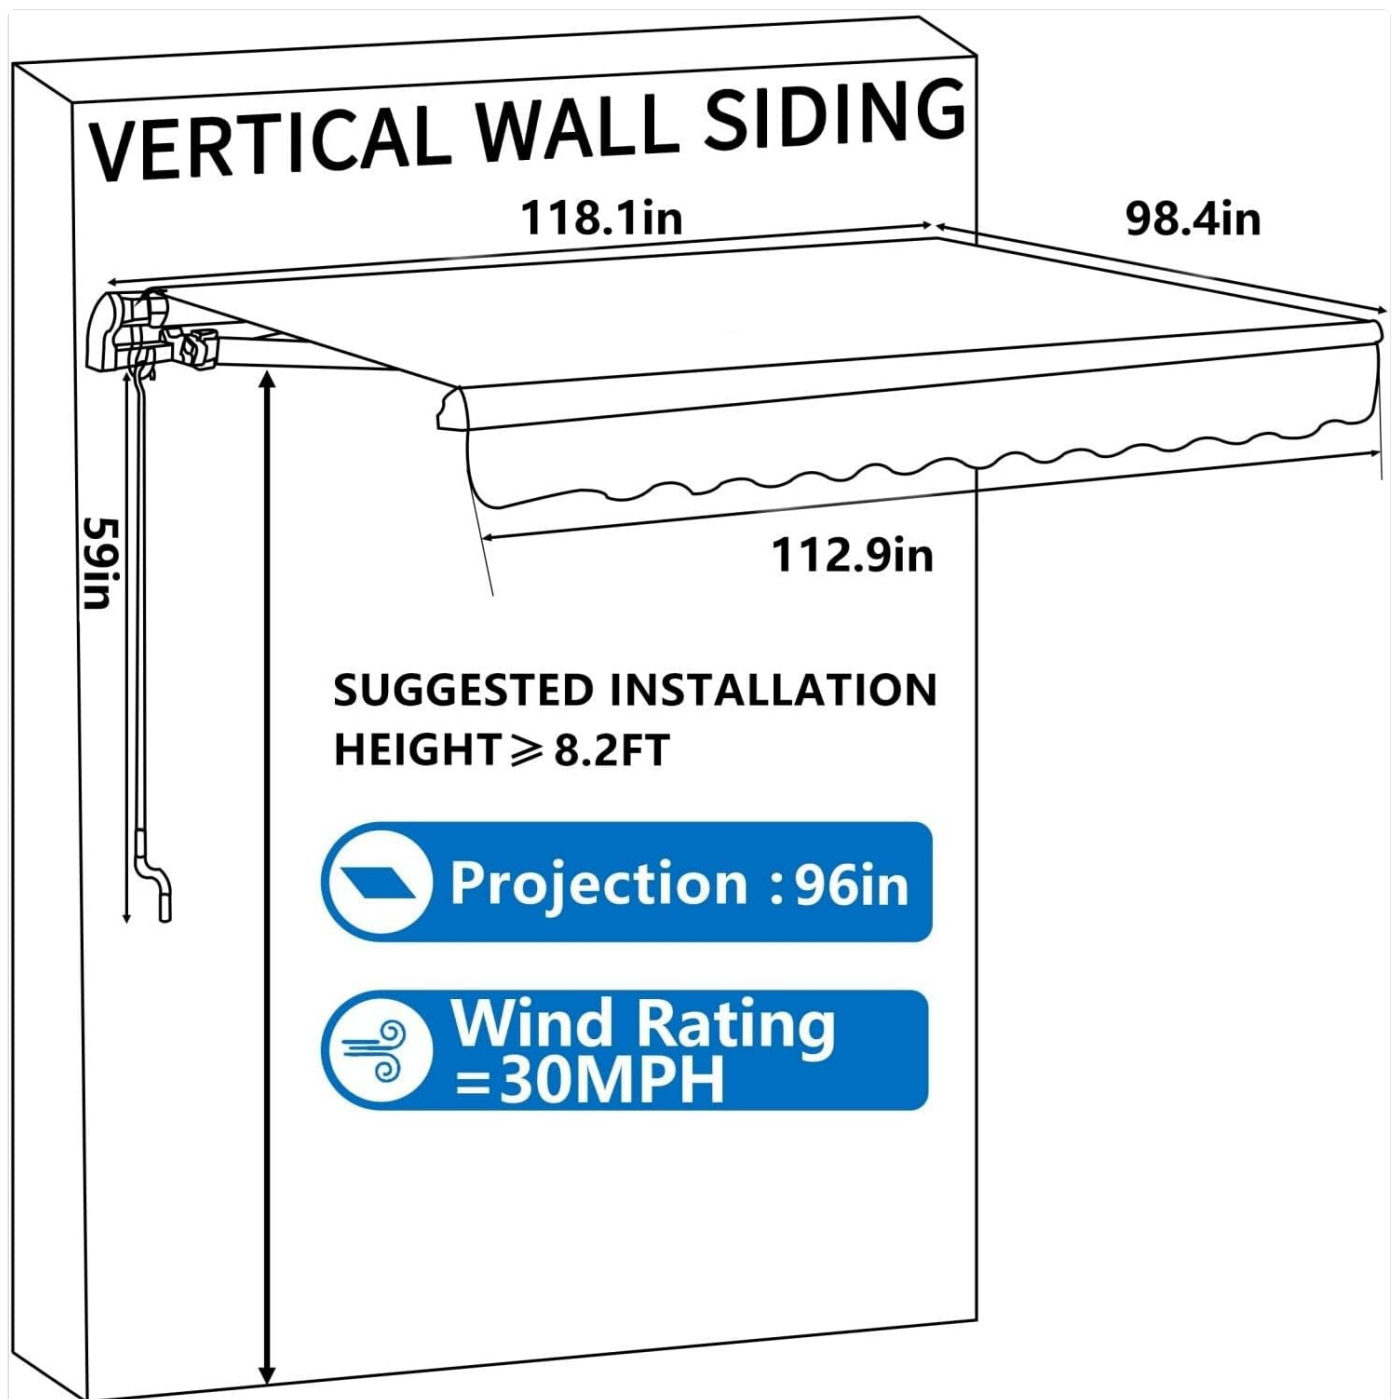


Image: A diagram illustrating the suggested installation height of 8.2 ft. and the awning's dimensions, including a projection of 96 inches and a wind rating of 30 MPH.

2. Mounting the Brackets

The awning's brackets are heavy-duty and designed to hold the awning securely. Follow the manufacturer's specific instructions for drilling and securing the mounting brackets to your wall. Use appropriate anchors and fasteners for your wall material.

3. Attaching the Awning

Once the brackets are securely mounted, carefully lift and attach the awning assembly to the brackets. Ensure all connections are tight and secure.

4. Adjusting the Pitch

After installation, the pitch (angle) of the awning can be adjusted from 0° to 40° to customize shading coverage. Refer to the specific adjustment mechanism on your awning for detailed instructions.



Image: A visual guide demonstrating the 45°-85° adjustable pitch mechanism for customizing shading coverage and the hand crank for retraction, noting it can only be installed on the left side.

OPERATING INSTRUCTIONS

The VEIKOUS awning is manually operated using a hand crank.

Extending the Awning:

1. Locate the hand crank, which is 59 inches long.
2. Insert the crank into the designated loop or hook on the awning mechanism.
3. Turn the hand crank clockwise to extend the awning. Continue turning until the awning reaches your desired extension or is fully extended. Do not force the crank if resistance is met.

Retracting the Awning:

1. Insert the hand crank into the designated loop or hook.

2. Turn the hand crank counter-clockwise to retract the awning. Continue turning until the awning is fully retracted against the wall.
3. Always retract the awning during strong winds, heavy rain, or when not in use for extended periods.

MAINTENANCE

Regular maintenance will help prolong the life of your awning.

- **Cleaning the Fabric:** The polyester fabric with PU coating is easy to scrub and dry. Clean with mild soap and water. Do not use harsh chemicals or abrasive cleaners. Allow the fabric to dry completely before retracting to prevent mildew.
- **Frame Maintenance:** The aluminum frame is corrosion-resistant. Wipe down the frame periodically with a damp cloth to remove dirt and debris.
- **Hardware Inspection:** Periodically check all bolts, screws, and mounting hardware to ensure they are tight and secure. Tighten any loose fasteners.
- **Mechanism Lubrication:** If the retraction/extension mechanism becomes stiff, apply a silicone-based lubricant to moving parts, avoiding the fabric.



Image: A detailed view of the heavy-duty aluminum supports and arms of the awning, highlighting their robust construction for better durability.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Awning does not extend/retract smoothly.	Mechanism is stiff or obstructed.	Check for obstructions. Apply silicone lubricant to moving parts.
Awning sags in the middle.	Improper pitch adjustment or fabric stretching.	Adjust the pitch to a steeper angle. Ensure fabric is taut.
Awning makes noise during operation.	Loose bolts or dry moving parts.	Tighten all mounting bolts. Lubricate moving parts.

Problem	Possible Cause	Solution
Water pooling on fabric.	Insufficient pitch or debris on fabric.	Increase the pitch angle. Clear any debris from the fabric.

SPECIFICATIONS

- Model:** 10'x8' Retractable Patio Awning
- Brand:** Overstock
- Material:** Polyester (Fabric), Aluminum (Frame)
- Color:** Gray
- Operation Mode:** Manual (Hand Crank)
- Fully Open Dimensions (W x L):**9.8 ft. x 8.2 ft. (approx. 118.1 in. x 98.4 in.)
- Maximum Coverage:** 80.36 sq.ft.
- Fabric Weight:** 280g/sq.m with PU coating
- Adjustable Pitch:** 0-40° (after installation)
- Recommended Minimum Installation Height:** 8.2 ft.
- Wind Resistance Rating:** Up to 30 MPH
- UPC:** 774144563317
- ASIN:** B0C3B577WD

WARRANTY AND SUPPORT

- For warranty information or technical support, please contact the retailer or manufacturer directly. Keep your purchase receipt as proof of purchase.
- Manufacturer:** Overstock
 - Seller:** BED BATH & BEYOND (via Amazon)
 - Return Policy: 30 days for refund/replacement (as per Amazon's buybox winner information).

