

KSE35CRA

Remote Control for KELVINATOR Air Conditioners

USER MANUAL

Introduction

This user manual provides comprehensive instructions for the operation and maintenance of your new Generic replacement remote control, designed for various KELVINATOR A/C and AC Air Conditioner models including EWH12HRB, KSE26CRA, KSE35CRA, KSE70CRA, ESE24HRBA, ESE30HRBA, and ESE12HRBA. Please read this manual carefully before using the remote control to ensure proper functionality and extend its lifespan.

Product Overview

The remote control is a direct replacement, offering full functionality for your compatible KELVINATOR air conditioner unit. It operates using infrared (IR) communication.



Figure 1: Front view of the remote control, showing the LCD display at the top and an array of control buttons below, including power, mode, temperature, and fan speed controls.

Setup

Before using the remote control, you will need to install batteries.

1. Battery Installation:



Figure 2: Rear view of the remote control with the battery compartment open, revealing two slots for AAA batteries.

- Locate the battery compartment on the back of the remote control.
- Slide the battery cover downwards or press the latch to open it.
- Insert two (2) AAA batteries (not included) into the compartment, ensuring the positive (+) and negative (-) terminals align correctly with the markings inside the compartment.
- Close the battery cover by sliding it back into place until it clicks securely.

2. Initial Use: No pairing or programming is typically required for this replacement remote. Once batteries are installed, point the remote towards your KELVINATOR air conditioner unit and begin operation.

Operating Instructions

Familiarize yourself with the buttons and their functions:

Remote Control Button Functions

| Button | Function |
|-------------|--|
| ON/OFF | Powers the air conditioner unit on or off. |
| MODE | Cycles through operating modes: AUTO, COOL, DRY, HEAT. |
| TEMP ▲ / ▼ | Adjusts the desired temperature setting up or down. |
| FAN SPEED | Selects fan speed: HIGH, MED, LOW. |
| SWING | Activates or deactivates the automatic louver swing function. |
| ECONOMIC | Engages or disengages the energy-saving mode. |
| TIMER | Sets the timer for automatic on/off operation. |
| CANCEL | Cancels current timer settings or other active functions. |
| AERATION | Activates or deactivates the air circulation/ventilation function. |
| RESET LOCK | Resets settings or locks the remote to prevent accidental changes. (Consult AC unit manual for specific function). |
| FRESH WATER | Specific function related to water features or humidification. (Consult AC unit manual for specific function). |
| HUMID | Activates or deactivates humidification function. |
| S-HEAT | Activates a special heating mode. (Consult AC unit manual for specific function). |

Note: The exact functionality of some advanced buttons (e.g., RESET LOCK, FRESH WATER, S-HEAT) may depend on the specific KELVINATOR air conditioner model you own. Refer to your air conditioner's original user

manual for detailed explanations of these features.

Maintenance

- Battery Replacement:** Replace batteries when the remote control's range decreases or the display becomes dim. Always replace both batteries at the same time with new AAA batteries.
- Battery Disposal:** Dispose of used batteries according to local regulations. Do not dispose of batteries in general household waste.
- Cleaning:** Wipe the remote control with a soft, dry cloth. Do not use liquid cleaners or abrasive materials, as they may damage the surface or internal components.
- Storage:** If the remote control will not be used for an extended period, remove the batteries to prevent leakage and potential damage to the remote.

Troubleshooting

Common Issues and Solutions

| Problem | Possible Cause / Solution |
|--|---|
| Remote control not working. | <ul style="list-style-type: none">Batteries are dead or inserted incorrectly. Replace batteries, ensuring correct polarity.Obstruction between remote and AC unit. Ensure a clear line of sight to the AC unit's infrared receiver.Remote control is too far from the AC unit. Move closer to the unit. |
| Display is dim or blank. | <ul style="list-style-type: none">Batteries are low. Replace batteries. |
| AC unit does not respond to certain buttons. | <ul style="list-style-type: none">The specific function may not be supported by your AC model. Refer to your AC unit's original manual.Button may be stuck or damaged. |

Specifications

- Product Type:** Replacement Remote Control
- Brand:** Generic
- Model Compatibility:** KELVINATOR EWH12HRB, KSE26CRA, KSE35CRA, KSE70CRA, ESE24HRBA, ESE30HRBA, ESE12HRBA A/C AC Air Conditioner models.
- Power Source:** 2 x AAA Batteries (not included)
- Wireless Communication:** Infrared (IR)
- Frequency:** 433 MHz

- Channel: 1

Warranty and Support


This product is inspected for quality before shipment. In case of any issues upon receipt, please contact the seller for assistance. The seller offers support for exchanges, excluding human-caused damage or damage from projector malfunction (though this product is a remote, not a projector, indicating a generic policy). Buyers are responsible for exchange shipping and handling charges.

For further support or inquiries, please refer to the contact information provided by your retailer or the original seller.

© 2023 Generic. All rights reserved.

This manual is for informational purposes only. Specifications are subject to change without notice.

Documents - KSE35CRA – KSE35CRA

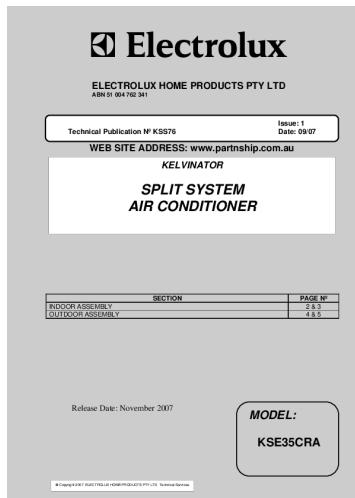

[\[pdf\]](#)

untitled Click HereElectrolux SPLIT SYSTEM AIR CONDITIONER KSE35CRAKSS76cdn shopify s files 1 0009 8074 6306 KSS76 v 1696274510 ||| ELECTROLUX HOME PRODUCTS PTY LTD ABN 51 004 762 341 Technical Publication N KSS76 Issue: 1 Date: 0 ... ase Date: November 2007 Copyright 2007 ELECTROLUX HOME PRODUCTS PTY LTD Technical Services MODEL: **KSE35CRA** MODEL: **KSE35CRA** EX. VIEW DRAWING 6368 INDOOR ASSEMBLY Page 2 KSS76 ITEM PART NUMBER D... lang:en **score:31** filesize: 114.1 K page_count: 5 document date: 2007-09-20