

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [CLP](#) /

> [CLP Lex Fabric Bar Stool with Metal Frame - Instruction Manual](#)

CLP Lex

CLP Lex Fabric Bar Stool with Metal Frame - Instruction Manual


Model: Lex

INTRODUCTION

This manual provides essential information for the safe assembly, operation, and maintenance of your CLP Lex Fabric Bar Stool. Please read these instructions carefully before use and retain them for future reference.

SAFETY INFORMATION

- Ensure all components are present and undamaged before assembly. Do not use if any parts are missing or broken.
- Assemble the stool on a soft, clean surface to prevent scratches.
- Tighten all screws and bolts securely. Periodically check and re-tighten as necessary.
- Do not stand on the stool. It is designed for seating only.
- Do not exceed the maximum weight capacity of 100 kg (220 lbs).
- Keep children away from the assembly area. Small parts can be a choking hazard.
- Use the stool on a flat, stable surface to prevent tipping.



Maximum load capacity: 100 kg.

PACKAGE CONTENTS

Please verify that all the following components are included in your package:


- Seat (1x)
- Gas Lift Cylinder (1x)

- Base (1x)
- Footrest Ring (1x)
- Mounting Hardware (screws, washers, Allen key)
- Floor Protector (pre-installed on base or separate)

ASSEMBLY INSTRUCTIONS

Follow these steps to assemble your CLP Lex Bar Stool:

1. **Attach the Footrest Ring:** Carefully insert the footrest ring into the designated slot on the gas lift cylinder. Ensure it is firmly seated.
2. **Insert Gas Lift into Base:** Place the large circular base on a flat surface. Insert the wider end of the gas lift cylinder into the central hole of the base. The gas lift should sit securely in the base.
3. **Attach Seat to Gas Lift:** Align the mounting plate on the underside of the seat with the top of the gas lift cylinder. Secure the seat to the gas lift using the provided screws and Allen key. Ensure all screws are tightened evenly and securely.
4. **Final Check:** Once assembled, gently test the stability of the stool. Ensure all connections are tight and the stool does not wobble.

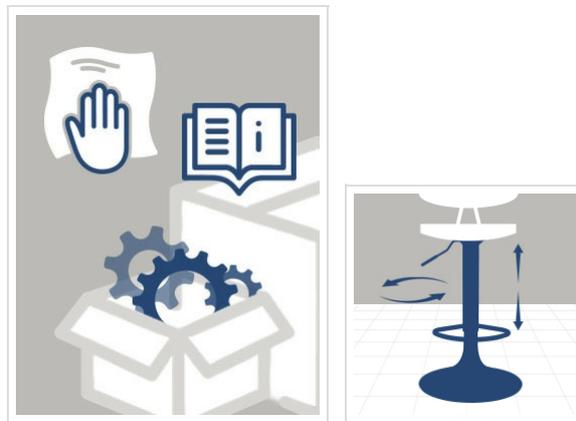

Images illustrating the stool's base and metal frame components for assembly.

OPERATING INSTRUCTIONS

The CLP Lex Bar Stool features adjustable height and 360-degree swivel functionality for optimal comfort and versatility.

- **Height Adjustment:** To adjust the seat height, locate the lever under the seat.
 - To raise the seat: Lift the lever while standing up, allowing the gas lift to extend. Release the lever at the desired height.
 - To lower the seat: Lift the lever while seated, applying slight pressure to the seat. Release the lever at the desired height.
- **360-Degree Swivel:** The seat can freely rotate 360 degrees. Simply turn the seat in any direction to adjust your position.

Video demonstrating the height adjustment and 360-degree swivel features of the bar stool.

MAINTENANCE AND CARE

Proper care will extend the life and appearance of your bar stool.

- **Fabric Upholstery:**
 - Regularly vacuum the fabric to remove dust and loose particles.
 - For spills, blot immediately with a clean, dry cloth. Do not rub.
 - For stubborn stains, use a mild fabric cleaner according to the product instructions. Test on an inconspicuous area first.
 - Avoid direct sunlight to prevent fading.
- **Metal Frame (Chrome):**

- Wipe with a soft, damp cloth.
- Avoid abrasive cleaners or harsh chemicals, as these can damage the chrome finish.
- Dry immediately with a clean cloth to prevent water spots.

- **General:**

- Periodically check all screws and bolts and re-tighten them to ensure stability.
- Ensure the floor protectors on the base are intact to prevent scratching your floor.



Ensure floor protectors are in place and clean the stool regularly.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Stool wobbles after assembly.	Screws are not fully tightened or unevenly tightened.	Check and re-tighten all assembly screws evenly. Ensure the stool is on a flat surface.
Height adjustment not working smoothly.	Gas lift mechanism may be stiff or obstructed.	Ensure no obstructions are blocking the lever. Apply slight pressure to the seat when lowering, or stand up completely when raising. If the issue persists, contact customer support.
Stool makes noise when swiveling.	Lack of lubrication in the swivel mechanism or loose connection.	Check if the seat is securely attached to the gas lift. A small amount of silicone spray lubricant might help if the noise is from the swivel mechanism (apply sparingly and wipe excess).

SPECIFICATIONS

Feature	Detail
Model Name	Lex
Brand	CLP
Overall Height	89 - 110 cm (adjustable)
Overall Width	45 cm
Overall Depth	46 cm
Seat Height	59 - 80 cm (adjustable)
Seat Dimensions (WxD)	45.5 x 38 cm
Backrest Height	32 cm
Footrest Height	19 - 40 cm

Feature	Detail
Weight Capacity	100 kg
Product Weight	6 kg
Frame Material	Metal (Chrome)
Seat Material	Polyester Fabric
Assembly Required	Yes
Special Features	Adjustable Height, Swivel, Footrest



Detailed dimensions of the CLP Lex Bar Stool.

WARRANTY AND SUPPORT

Your CLP Lex Bar Stool is covered by a standard manufacturer's warranty against defects in materials and workmanship. For specific warranty details, claims, or technical support, please contact CLP customer service through the retailer where you purchased the product or visit the official CLP website.

For more information about CLP products, visit the [CLP Store on Amazon](#).

