

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [LiebeWH](#) /

› [LiebeWH Handheld Bidet Sprayer Instruction Manual](#)

## LiebeWH LiebeWHq30p512rid

# LiebeWH Handheld Bidet Sprayer Instruction Manual

Model: LiebeWHq30p512rid

## 1. INTRODUCTION

---

Thank you for choosing the LiebeWH Handheld Bidet Sprayer. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new bidet sprayer. Please read these instructions thoroughly before use and retain them for future reference.

## 2. PRODUCT OVERVIEW

---

### 2.1 Components

- Handheld Bidet Sprayer
- Wall Bracket
- Mounting Screw and Anchor

### 2.2 Features

- Constructed from plated ABS for durability and strength.
- Polished finish designed to resist scratches and tarnishing.
- Designed for easy installation and user-friendly operation.
- Suitable for personal hygiene, cloth diaper rinsing, toilet cleaning, and other bathroom or kitchen tasks.



Image 1: LiebeWH Handheld Bidet Sprayer with indicated dimensions (3.3cm/1.30in width, 3.2cm/1.25in head diameter, 18cm/7.09in length).



Image 2: The handheld bidet sprayer, wall bracket, and mounting screw with anchor.

### 3. SETUP AND INSTALLATION

---

Follow these steps for proper installation of your bidet sprayer. Professional installation is recommended if you are unfamiliar with plumbing.

1. **Turn off Water Supply:** Locate the water shut-off valve for your toilet and turn it clockwise until the water supply is completely off.
2. **Flush Toilet:** Flush the toilet to drain the tank and bowl. Hold the flush handle down to ensure all water is removed.
3. **Disconnect Supply Tube:** Place a towel or small bucket under the toilet tank connection. Disconnect the flexible water supply tube from the bottom of the toilet flush tank.
4. **Install T-Adapter:** Connect the T-adapter to the fill valve on the bottom of your toilet tank. Ensure the rubber washer is properly seated to prevent leaks. Hand-tighten first, then use a wrench for a snug fit, but do not overtighten.
5. **Reconnect Supply Tube:** Connect the flexible water supply tube to the bottom of the T-adapter. Hand-tighten, then use a wrench for a snug fit.
6. **Connect Bidet Hose:** Connect one end of the bidet hose to the side outlet of the T-adapter and the other end to the handheld bidet sprayer. Ensure all connections are secure.
7. **Mount Wall Bracket:** Choose a convenient location near the toilet for the wall bracket. Mark the drilling points, drill pilot holes, insert wall anchors, and secure the bracket with the provided screw.
8. **Restore Water Supply:** Slowly turn the water shut-off valve counter-clockwise to restore the water supply to the toilet. Check all connections for leaks. If leaks occur, tighten the connections slightly.

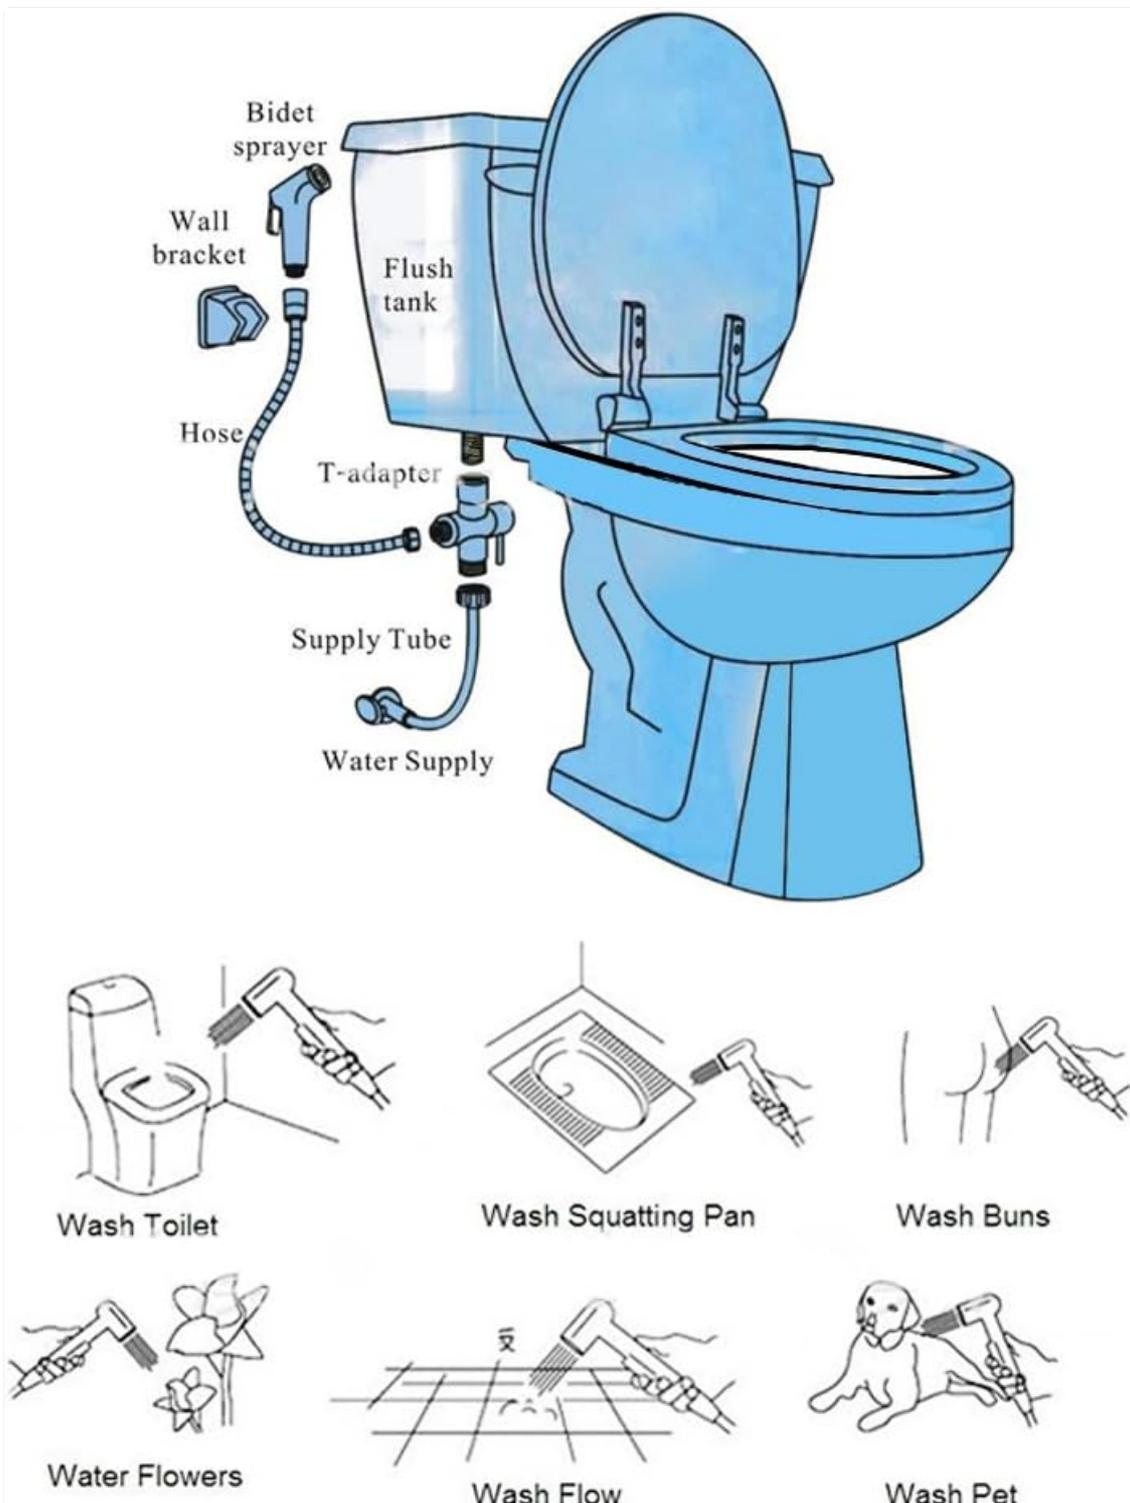


Image 3: Diagram illustrating the installation of the bidet sprayer system to a toilet, including the T-adapter, hose, and wall bracket. Also shows various usage scenarios such as washing the toilet, squatting pan, personal hygiene, watering flowers, floor cleaning, and pet washing.

#### 4. OPERATING INSTRUCTIONS

Using your LiebeWH Handheld Bidet Sprayer is straightforward:

1. **Retrieve Sprayer:** Take the handheld sprayer from its wall bracket.
2. **Aim:** Point the nozzle towards the area you wish to clean.
3. **Activate Water Flow:** Press the lever on the sprayer handle to release water. The water pressure can be adjusted by how much you depress the lever.
4. **Release Lever:** Release the lever to stop the water flow.

5. **Return to Bracket:** Place the sprayer back into its wall bracket after use.

**Important:** Always ensure the water supply to the sprayer is turned off at the T-adapter or main valve when not in use to prevent accidental leaks or pressure build-up.



Image 4: A close-up view of the bidet sprayer head emitting a strong, consistent stream of water.

## 5. MAINTENANCE

---

Regular maintenance will ensure the longevity and optimal performance of your bidet sprayer.

- **Cleaning:** Clean the exterior of the sprayer and hose regularly with a soft cloth and mild soap. Avoid using abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the polished finish.
- **Nozzle Cleaning:** If water flow becomes weak or uneven, the nozzle holes may be partially blocked. Gently clean the nozzle holes with a soft brush or toothpick.
- **Leak Checks:** Periodically inspect all connections for any signs of leaks. Tighten connections if necessary.
- **Storage:** If the sprayer will not be used for an extended period, ensure the water supply is turned off.

## 6. TROUBLESHOOTING

---

Refer to the following table for common issues and their solutions:

Problem	Possible Cause	Solution
Low water pressure	Water supply valve partially closed; clogged nozzle; kinked hose.	Ensure water supply valve is fully open; clean nozzle holes; straighten hose.
Water leaks from connections	Loose connections; worn O-rings/washers.	Tighten connections; replace O-rings or washers if damaged.
Sprayer does not stop water flow	Faulty internal mechanism; debris in valve.	Contact customer support for assistance; check for debris.

## 7. SPECIFICATIONS

---

Feature	Detail
Model Number	LiebeWHq30p512rid
Material	Plated ABS
Finish Type	Polished
Item Weight	3.2 ounces (approx. 90.7 grams)
Package Dimensions	9.02 x 5.51 x 2.56 inches (approx. 22.9 x 14 x 6.5 cm)
Included Components	Sprayer, Wall Bracket, Mounting Hardware

## 8. WARRANTY AND SUPPORT

---

Specific warranty information for the LiebeWH Handheld Bidet Sprayer is not provided in the product details. For warranty claims, technical support, or any questions regarding your product, please refer to the retailer where the product was purchased or visit the official LiebeWH brand store for contact information.

You can visit the LiebeWH Store at: [LiebeWH Official Store](#)