

Satco S9001

Satco S9001 E26 Socket Adapter for Recessed Down Light Instruction Manual

Model: S9001

INTRODUCTION

This manual provides essential instructions for the safe and proper installation and use of the Satco S9001 E26 Socket Adapter for Recessed Down Lights. Please read this manual thoroughly before installation and retain it for future reference.


SAFETY INFORMATION

WARNING: Risk of electric shock. Installation should be performed by a qualified electrician or a person familiar with the construction and operation of the product and the hazards involved.

- Always disconnect power at the circuit breaker before installing or servicing the adapter.
- Ensure all electrical connections are secure and comply with local electrical codes.
- Do not exceed the maximum wattage or voltage ratings specified for the adapter or the recessed fixture.
- Inspect the adapter for any damage before installation. Do not use if damaged.
- This adapter is designed for indoor use in dry locations only.

PRODUCT OVERVIEW

The Satco S9001 is an E26 socket adapter designed to convert existing wiring in recessed down light fixtures to accept a standard E26 (medium base) light bulb. It features a durable construction for reliable performance.

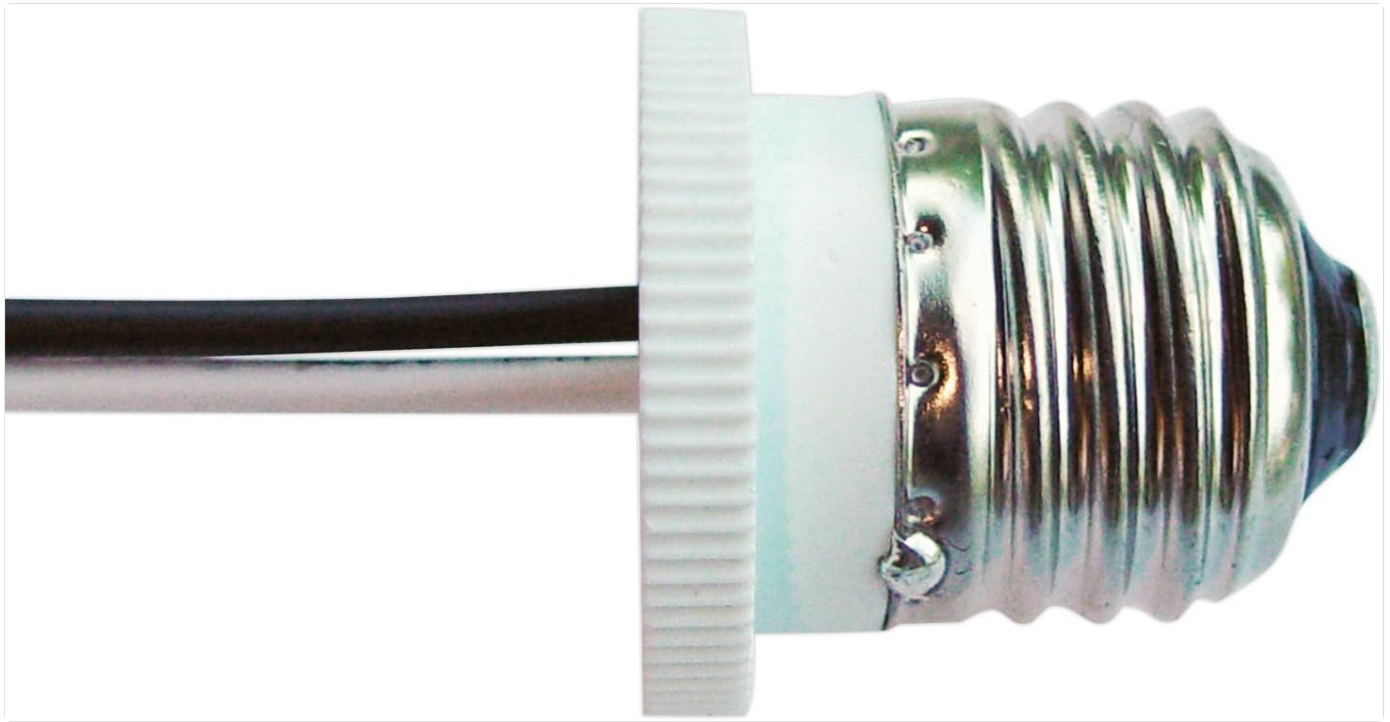

An image showing the Satco S9001 E26 Socket Adapter. The adapter features a standard E26 screw-in base on one end, a white plastic housing, and two electrical wires extending from the other end, designed for connecting a standard bulb socket to recessed lighting wiring.

Components:

- E26 Screw-in Base: Connects to the light bulb.
- Adapter Body: White plastic housing.
- Electrical Wires: For connection to the recessed fixture's power supply.

SETUP AND INSTALLATION

1. **Turn Off Power:** Locate the circuit breaker controlling the recessed light fixture and turn off the power. Verify power is off using a voltage tester.
2. **Access Fixture Wiring:** Carefully remove the existing trim and bulb from the recessed fixture to expose the wiring compartment.
3. **Connect Adapter Wires:**
 - Connect the black wire from the S9001 adapter to the hot (usually black) wire of the recessed fixture using a wire nut.
 - Connect the white wire from the S9001 adapter to the neutral (usually white) wire of the recessed fixture using a wire nut.
 - Ensure all connections are tight and secure.
4. **Secure Adapter:** Carefully tuck the wired adapter and wire nuts into the recessed fixture's junction box or housing, ensuring no wires are pinched.
5. **Install Light Bulb:** Screw an E26 base light bulb into the S9001 adapter. Do not overtighten.
6. **Restore Fixture:** Reinstall the recessed light trim.
7. **Restore Power:** Turn the power back on at the circuit breaker.
8. **Test:** Turn on the light switch to confirm proper operation.

OPERATING INSTRUCTIONS

Once installed, the Satco S9001 E26 Socket Adapter functions as a standard E26 light bulb socket. Simply install any compatible E26 base light bulb (not included) into the adapter. The light will operate via the existing wall switch or dimmer connected to the recessed fixture.

MAINTENANCE

The Satco S9001 E26 Socket Adapter requires minimal maintenance. Ensure power is off before performing any maintenance.

- Periodically check electrical connections for tightness.
- Clean the adapter with a dry, soft cloth if necessary. Do not use liquid cleaners.
- Replace light bulbs as needed, ensuring they are compatible E26 base bulbs and do not exceed the fixture's maximum wattage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	No power to fixture.	Check circuit breaker and wall switch.
	Loose wire connection.	Turn off power, check all wire nut connections.
	Defective light bulb.	Replace light bulb with a known working one.
	Incorrect wiring.	Review installation steps, ensure correct wire connections.
Light flickers.	Loose bulb in adapter.	Tighten bulb in adapter.
	Loose wire connection.	Turn off power, check all wire nut connections.
	Incompatible dimmer switch.	Ensure bulb and dimmer are compatible.

SPECIFICATIONS

- **Model:** S9001
- **Manufacturer:** Satco
- **Product Type:** E26 Socket Adapter for Recessed Down Light
- **Socket Type:** E26 (Medium Base)
- **Compatibility:** Designed for use with E26 base light bulbs (not included).
- **Included:** One (1) Satco S9001 E26 Socket Adapter. Light bulb not included.

Note: Specifications are based on available product information and are subject to change.

WARRANTY INFORMATION

For warranty information regarding the Satco S9001 E26 Socket Adapter, please contact the manufacturer directly. Details may be available on the official Satco website or through your point of purchase.

Reference: "Contact manf for warranty info."

SUPPORT

For technical assistance or further inquiries, please visit the official Satco website or contact their customer support

department. When contacting support, please have your product model number (S9001) available.

Manufacturer: Satco

Website: www.satco.com

© 2023 Satco. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question