

## KING JIM SR-RK2

# King Jim Label Writer Tepra PRO Rilakkuma SR-RK2

## INSTRUCTION MANUAL

### 1. Introduction

This manual provides detailed instructions for the safe and effective use of your King Jim Label Writer Tepra PRO Rilakkuma SR-RK2. Please read this manual thoroughly before operating the device and retain it for future reference.



Figure 1.1: The King Jim Tepra PRO Rilakkuma SR-RK2 Label Writer. This image displays the device's full keyboard layout and integrated screen, highlighting its compact and user-friendly design.

## 2. Safety Information

---

- Do not expose the device to water or excessive moisture.
- Avoid dropping the device or subjecting it to strong impacts.
- Use only King Jim PRO series label tapes with this device.
- Keep out of reach of children.
- Ensure proper battery installation and disposal according to local regulations.

## 3. Package Contents

---

Verify that all items are present in the package:

- King Jim Label Writer Tepra PRO Rilakkuma SR-RK2 unit
- Trial PRO Tape (sample label tape)
- Instruction Manual (this document)



©2024 San-X Co., Ltd. All Rights Reserved.

**Figure 3.1:** The King Jim Tepra PRO Rilakkuma SR-RK2 Label Writer in its retail packaging. This image shows the front view of the product box, indicating the brand and model.

## 4. Setup

### 4.1. Power Supply

The SR-RK2 requires batteries for operation. Batteries are not included with the device.

1. Open the battery compartment cover located on the back of the device.
2. Insert the required number of AA alkaline batteries, ensuring correct polarity (+/-). The device also supports rechargeable Ni-MH batteries.
3. Close the battery compartment cover securely.

## 4.2. Loading Label Tape

The SR-RK2 uses King Jim PRO series label tapes, compatible with widths from 4mm to 18mm.

1. Open the tape compartment cover on the top of the device.
2. Insert the label tape cartridge firmly into the compartment, ensuring it clicks into place.
3. Gently pull a small length of tape out from the tape exit slot.
4. Close the tape compartment cover.

## 5. Operating Instructions

---


### 5.1. Powering On/Off

Press the **ON/OFF** button located on the bottom left of the keyboard to turn the device on or off.

### 5.2. Basic Label Creation

1. **Text Input:** Use the QWERTY keyboard to type your desired text. The device supports alphanumeric characters and Japanese kana. Press the **Shift** key for uppercase letters or alternate characters.
2. **Character Conversion:** Use the **(Convert/Space)** button to convert kana input to kanji or to insert a space.
3. **Font Selection:** Press the **(Font)** button to cycle through available font styles. The device offers three cute font types.
4. **Text Size:** Press the **(Text Size)** button to adjust the size of your text.
5. **Frames, Emoticons, and Illustrations:**
  - Press the **(Emoji)** button to access 149 types of emoticons.
  - Press the **(Illustration)** button to access 7 types of illustrations.
  - Press the **(Frame)** button to select from 39 types of decorative frames.
6. **Preview:** Before printing, press the **(Preview)** button to view how your label will appear on the screen. The screen displays 6 characters x 2 lines.
7. **Printing:** Once satisfied with your label, press the **(Print)** button to print.

- 大きくなって見やすい！  
6文字×2行の液晶表示。

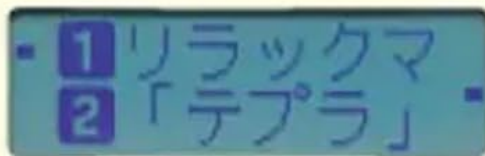

- ファイル登録機能  
よく使うお名前やフレーズを5個まで保存できます。
- 3行・2段落まで印刷OK



- 充電式ニッケル水素電池にも対応  
単3形アルカリ乾電池、または単3形充電式ニッケル水素電池に対応しています。

Figure 5.1: Display screen and key features of the SR-RK2. This image illustrates the 6-character by 2-line LCD display, the file saving function, support for 3-line printing, and compatibility with rechargeable Ni-MH batteries.



Figure 5.2: Available emoticons, illustrations, and frames. This image showcases a selection of the 149 emoticons, 7 illustrations, and 39 frames that can be used to customize labels.

### 5.3. Saving and Recalling Files

The device allows you to save frequently used text or phrases.

1. After typing your text, press the **(File)** button.
2. Follow the on-screen prompts to save your text to one of the available memory slots (up to 5 files).
3. To recall a saved file, press the **(File)** button and select the desired file from the list.

## 6. Maintenance

### 6.1. Cleaning the Print Head

If print quality deteriorates, the print head may need cleaning.

1. Turn off the device and remove the label tape cartridge.
2. Gently wipe the print head with a cotton swab lightly moistened with isopropyl alcohol.
3. Allow the print head to dry completely before reinserting the tape and turning on the device.

### 6.2. Battery Replacement

Replace batteries when the low battery indicator appears on the screen or when the device fails to power on.

1. Turn off the device.
2. Open the battery compartment and remove the old batteries.
3. Insert new batteries, observing correct polarity.
4. Close the battery compartment.

## 7. Troubleshooting

---

- **Device does not power on:** Check battery installation and ensure batteries are not depleted. Replace if necessary.
- **Poor print quality:** Clean the print head as described in Section 6.1. Ensure the label tape is correctly installed and not damaged.
- **Tape jam:** Turn off the device, open the tape compartment, and carefully remove any jammed tape. Ensure the tape is properly aligned when reinserting.
- **Blank labels:** Verify that the label tape is inserted correctly and that the print head is clean.

## 8. Specifications

---

<b>Model</b>	SR-RK2
<b>Brand</b>	KING JIM
<b>Printing Method</b>	Thermal Transfer PRO
<b>Compatible Label Widths</b>	4, 6, 9, 12, 18 mm (P-TAPE Standard)
<b>Max Print Resolution</b>	300 dpi
<b>Power Source</b>	AA Batteries (not included), Rechargeable Ni-MH Batteries compatible
<b>Dimensions (W x D x H)</b>	17.3 x 10.9 x 5.8 cm
<b>Weight</b>	680 g
<b>Special Features</b>	Portable

## 9. Warranty Information

---

King Jim products are manufactured to high-quality standards. For specific warranty terms and conditions, please refer to the warranty card included with your product or visit the official King Jim website. Keep your proof of purchase for warranty claims.

## 10. Support

---

For further assistance, technical support, or inquiries regarding your King Jim Label Writer Tepra PRO Rilakkuma SR-RK2, please contact King Jim customer service through their official website or the contact information provided in your product documentation.