

Beyution WY-AXS240BTU-HK

Beyution Replacement Remote Control User Manual

For Hitachi Soundbar Models HSB280BT and AXS240BTU

1. INTRODUCTION

This manual provides comprehensive instructions for the Beyution replacement infrared remote control, designed for use with Hitachi Soundbar models HSB280BT and AXS240BTU. This remote control is a direct replacement and does not require any programming or setup before use. Simply insert batteries, and it is ready for operation.

2. PRODUCT OVERVIEW

The Beyution replacement remote control offers a straightforward solution for managing your Hitachi Soundbar. It features an ergonomic design for comfortable handling and responsive buttons for ease of use. The remote operates using infrared technology, providing a stable performance with an effective range of up to 10 meters.

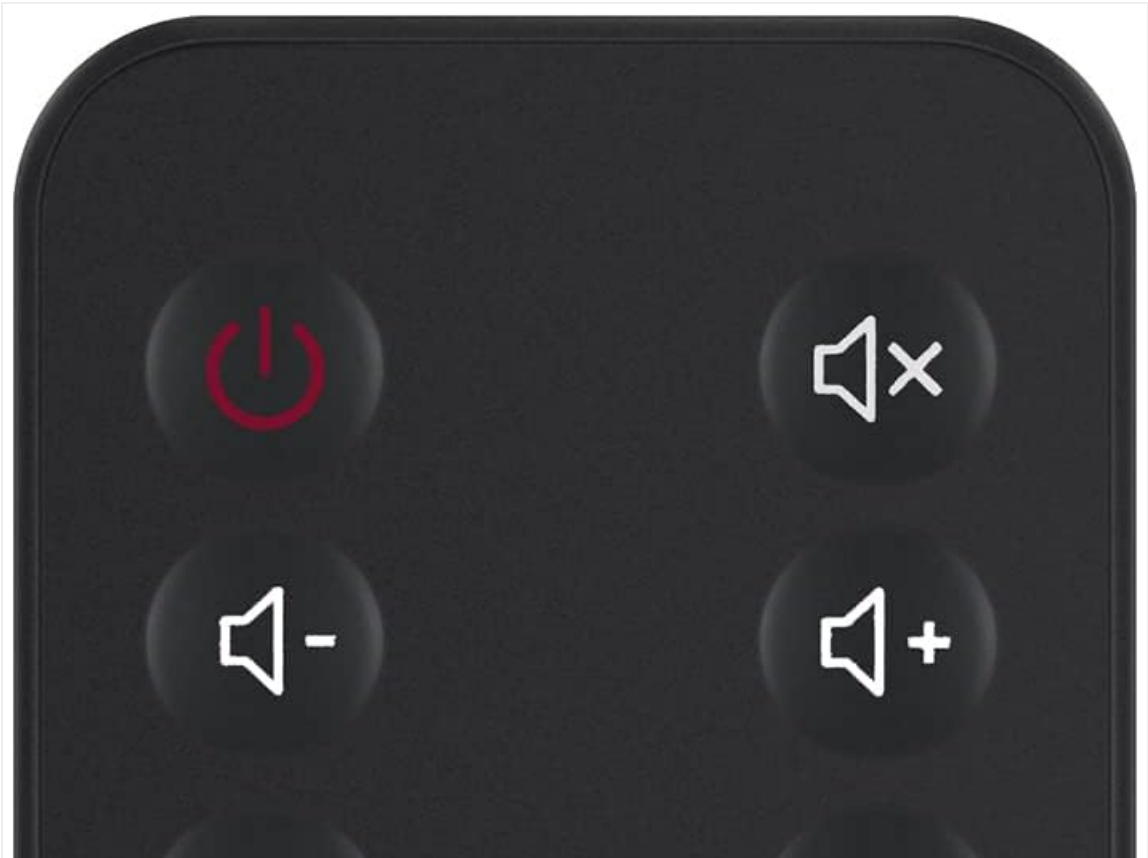




Figure 1: Front view of the Beyution replacement remote control. This image displays the layout of all buttons, including power, volume, mute, subwoofer level, treble level, and input selection buttons such as COAX, HDMI OUT (ARC), AUX, OPTICAL, and a Bluetooth pairing button.

Key Features:

- **Model:** HSB280BT AXS240BTU (Compatible Soundbar Models)
- **Connectivity:** Infrared
- **Material:** ABS Plastic
- **Operating Distance:** Up to 10 meters
- **Setup:** No programming required; ready to use with compatible soundbars.

3. SETUP

This replacement remote control requires minimal setup. Follow these steps to begin using your remote:

1. **Install Batteries:** Locate the battery compartment on the back of the remote control. Insert two (2) AAA batteries, ensuring correct polarity (+ and -) as indicated inside the compartment.
2. **Ready for Use:** Once batteries are installed, the remote control is ready to operate your Hitachi Soundbar models HSB280BT or AXS240BTU. No additional pairing or programming is necessary.



Figure 2: Angled view of the remote control, illustrating its form factor and the location of the battery compartment on the rear side.

4. OPERATING INSTRUCTIONS

Point the remote control directly at your Hitachi Soundbar. Ensure there are no obstructions between the remote and the soundbar's infrared receiver.

- **Power Button ():** Press to turn the soundbar on or off.
- **Mute Button ():** Press to mute or unmute the sound.
- **Volume Up/Down (/):** Adjust the main volume level of the soundbar.
- **Subwoofer Level (SUB - / SUB +):** Adjust the bass level of the connected subwoofer.
- **Treble Level (TRB - / TRB +):** Adjust the treble level for higher frequency sounds.
- **Input Selection (COAX, HDMI OUT (ARC), AUX, OPTICAL):** Press the corresponding button to switch between different audio input sources.
- **Bluetooth Pairing (☆):** Press this button to activate Bluetooth pairing mode on the soundbar, allowing you to connect a new Bluetooth device.

5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your remote control.

- **Battery Replacement:** Replace batteries when the remote's response becomes sluggish or it ceases to function. Always replace both batteries simultaneously with new AAA batteries. Do not mix old and new batteries, or different types of batteries.
- **Cleaning:** Use a soft, dry cloth to clean the remote control. Avoid using liquid cleaners or abrasive materials, as these can damage the surface or internal components.
- **Storage:** Store the remote control in a cool, dry place away from direct sunlight and extreme temperatures. If the remote will not be used for an extended period, remove the batteries to prevent leakage.

6. TROUBLESHOOTING

If you encounter issues with your remote control, please refer to the following troubleshooting steps:

- **Remote Not Responding:**
 - Ensure the batteries are inserted correctly with the proper polarity.
 - Replace old batteries with new AAA batteries.
 - Check for any obstructions between the remote control and the soundbar's infrared receiver.
 - Ensure you are within the effective operating range (up to 10 meters) and pointing the remote directly at the soundbar.
- **Limited Operating Range:**
 - Replace batteries. Weak batteries can reduce the remote's range.
 - Ensure no strong light sources (e.g., direct sunlight, fluorescent lights) are interfering with the infrared signal.
- **Remote Control Damaged or Defective:** If the remote control is physically damaged or does not function despite following the troubleshooting steps, please refer to the Warranty and Support section for assistance.

7. SPECIFICATIONS

Product Dimensions	6.3 x 1.57 x 0.39 inches
Item Weight	2.82 ounces
Batteries Required	2 AAA batteries (not included)
Connectivity Technology	Infrared
Compatible Devices	Hitachi Soundbar models HSB280BT, AXS240BTU
Special Feature	No Programming Required
Maximum Operating Distance	10 Meters

8. WARRANTY AND SUPPORT

This Beyution replacement remote control comes with a **6-month warranty period** from the date of purchase. If you experience any issues, such as receiving a damaged or non-functional remote, or if you have questions regarding compatibility, please contact our customer service team. We are committed to providing a satisfactory

solution within 24 hours.

For support, please refer to the contact information provided by your retailer or on the product packaging.

© 2023 Beyution. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0C58T51Z6>

More documents and user manuals: <https://manuals.plus/>