

UUQ 3-9x40

UUQ 3-9x40 Rifle Scope Instruction Manual

Model: 3-9x40

Introduction	What's Included	Setup	Operating	Maintenance	Troubleshooting
	Specifications		Warranty & Support		

1. INTRODUCTION

This manual provides detailed instructions for the proper setup, operation, and maintenance of your UUQ 3-9x40 Rifle Scope. Designed for durability and precision, this scope features red/green illumination, a rangefinder reticle, and is built with aircraft-grade aluminum alloy, ensuring shock-resistant, waterproof, and fog-proof performance. Please read this manual thoroughly before use to ensure optimal performance and safety.

2. WHAT'S INCLUDED

Upon unboxing your UUQ 3-9x40 Rifle Scope, please verify that all the following components are present:

- 1 × UUQ 3-9x40 Rifle Scope
- 1 × Lens Cover (Flip-Up)
- 1 × Cleaning Cloth
- 2 × 20mm Mounts
- 1 × CR2032 Battery
- 1 × Allen Wrench
- 1 × Instruction Manual



- 1 3-9X40EG Rifle Scope** **2 Lens Cover** **3 Cleaning Cloth**
4 20mm Mounts X2 **5 Allen Wrench** **6 Instructions**
7 CR2032 Battery

Figure 2.1: All components included with the UUQ 3-9x40 Rifle Scope.

Your browser does not support the video tag.


Video 2.1: An overview of the items included in the packaging box for the UUQ 3-9x40 Rifle Scope.

3. SETUP

3.1. Mounting the Scope

The UUQ 3-9x40 Rifle Scope comes with two 20mm mounts designed for standard Picatinny rails. Ensure your rail size is 20mm for proper fitment. Use the included Allen wrench to secure the mounts firmly to your rifle and then attach the scope.

Fits any 20mm Standard Rail Mount

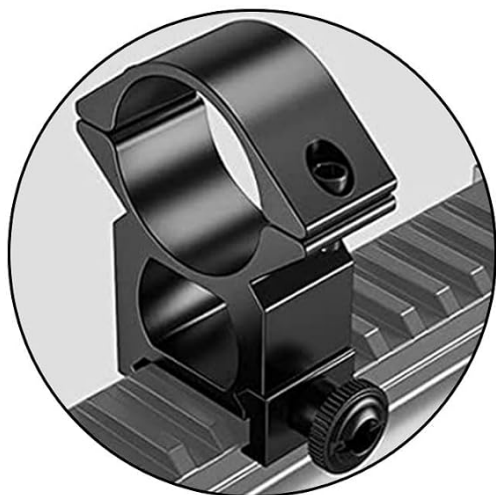

Please confirm that your rail size is **20mm** before installation to ensure that our scope can be properly mounted.



Figure 3.1: 20mm Picatinny mounts for secure attachment.

3.2. Installing the CR2032 Battery

The scope requires one CR2032 battery for the reticle illumination. To install, unscrew the illumination button cap located on the side of the scope. Insert the CR2032 battery with the positive (+) side facing up, then securely screw the cap back on.

Your browser does not support the video tag.

Video 3.1: Demonstration of installing the CR2032 battery and adjusting the red/green illumination on the UUQ 3-9x40 Rifle Scope.

3.3. Adjusting the Diopter

The diopter adjustment ring is located at the eyepiece. Rotate this ring until the reticle appears sharp and clear to your eye. This adjustment compensates for individual eyesight differences.

4. OPERATING THE SCOPE

4.1. Magnification Adjustment

The scope offers a magnification range from 3x to 9x. Rotate the magnification ring, located near the eyepiece, to adjust the zoom level to your desired setting. This allows for clear viewing at various distances.



**Magnification:
3X@300 yards**



**Magnification:
9X@300 yards**



Figure 4.1: Visual representation of 3x versus 9x magnification.

Your browser does not support the video tag.

Video 4.1: Demonstration of adjusting the 3x-9x magnification on the rifle scope, showing the clarity at different zoom levels.

4.2. Reticle Illumination (Red/Green)

The scope features a dual-color illuminated reticle with five brightness levels for both red and green. Use the illumination dial on the side of the scope to select your preferred color and brightness setting, enhancing visibility in various lighting conditions.



5 Brightness Levels


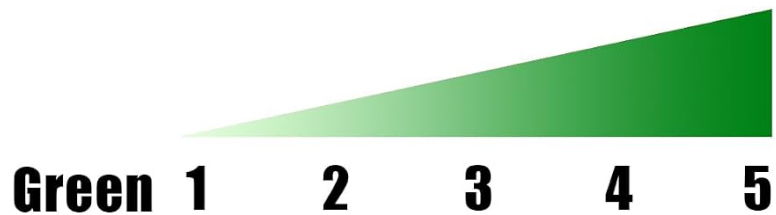


Figure 4.2: Red and Green illumination with 5 brightness levels.

4.3. Windage and Elevation Adjustments

The scope is equipped with capped windage and elevation turrets. Unscrew the caps to reveal the adjustment dials. Each click on the dial corresponds to 1/4 MOA (Minute of Angle) at 100 yards. Adjust these turrets to fine-tune your aim for horizontal (windage) and vertical (elevation) accuracy. The scope also features a lockable and resettable zero feature, allowing you to return to your zero setting easily after making temporary adjustments.

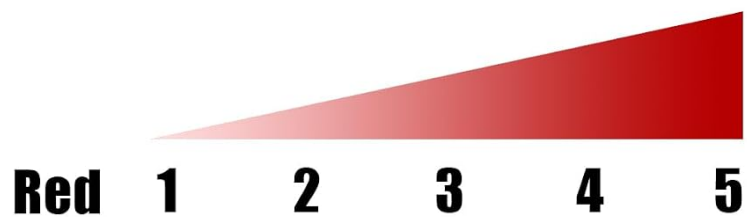

40mm Fully Multi-coated Objective Lens



**Elevation Adjustment
1 Click=1/4 MOA**



Battery Compartment



**Windage Adjustment
1 Click=1/4 MOA**



3-9x Magnification Adjustment Ring



Fast Focus Eyepiece

Figure 4.3: Key adjustment points on the rifle scope.

Your browser does not support the video tag.

Video 4.2: Explanation of the lockable and resettable zero feature for windage and elevation adjustments.

5. MAINTENANCE

5.1. Cleaning the Lenses

Use the provided cleaning cloth to gently wipe the multi-coated lenses. Avoid using harsh chemicals or abrasive materials that could damage the lens coatings. For stubborn smudges, a small amount of lens cleaning solution designed for optics can be applied to the cloth, not directly to the lens.

5.2. General Care

Store the scope in a dry, cool place away from direct sunlight and extreme temperatures. Ensure the flip-up lens covers are closed when not in use to protect the lenses from dust and debris. The scope's aircraft-grade aluminum construction and O-ring seals provide excellent waterproof and fog-proof performance, but proper care will extend its

lifespan.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Reticle not illuminating	Battery is dead or incorrectly installed.	Replace the CR2032 battery, ensuring the positive (+) side faces up. Check battery contacts.
Blurry image	Diopter not adjusted correctly; lenses are dirty.	Adjust the diopter ring until the reticle is sharp. Clean the lenses with the provided cloth.
Scope not holding zero	Mounts are loose; scope is damaged.	Ensure mounts are securely tightened with the Allen wrench. If the problem persists, contact support.
Fogging inside the scope	Extreme temperature changes; seal compromise.	Allow the scope to acclimate to temperature changes. If fogging persists, contact support as the nitrogen fill may be compromised.

7. SPECIFICATIONS

Feature	Detail
Model Name	3-9x40 Rifle Scope
Magnification	3x - 9x
Objective Lens Diameter	40 mm
Reticle Type	Illuminated Rangefinder (Red/Green)
Illumination Levels	5 for Red, 5 for Green
Windage & Elevation Click Value	1/4 MOA @ 100 yards
Field of View (FOV)	13.41-40.38 @ 100 yards
Exit Pupil Diameter	69.1 mm - 85.09 mm
Length	12.3 inches (312 mm)
Weight	18.4 Ounces (521.63 g)
Material	Aircraft-Grade Aluminum Alloy
Waterproof & Fog-Proof	Yes (O-ring sealed, Nitrogen filled)
Lenses	Full Multi-Coated with Anti-Reflective Coatings
Compatible Mounts	20mm Picatinny Rail (Weaver Mount)
Battery Type	1 x CR2032 (Included)

8. WARRANTY & SUPPORT

8.1. Warranty Information

The UUQ 3-9x40 Rifle Scope comes with a **1-year manufacturer's warranty**. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims.

8.2. Customer Support

For any questions, technical assistance, or warranty claims, please contact UUQ customer support. Refer to the contact information provided on the product packaging or the official UUQ website.

© 2026 UUQ. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0C5H4P5X3>

More documents and user manuals: **<https://manuals.plus/>**