Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

VANPET Barb

VANPET 36-Inch Sprayer Wand Instruction Manual

MODEL: BARB

Introduction

This manual provides detailed instructions for the proper installation, operation, and maintenance of your VANPET 36-Inch Sprayer Wand. Please read this manual thoroughly before use to ensure safe and efficient operation. Keep this manual for future reference.

Product Features

- **Durable Construction:** The sprayer wand is primarily constructed from stainless steel, offering strength, durability, and resistance to drops and breakage.
- **Adjustable Nozzle:** Easily rotate the nozzle to switch between a fine mist and a straight stream spray pattern, adapting to various application needs.
- **Secure Brass Barb Connection:** Features a high-quality 3/8-inch brass barb, designed for robust connection and compatibility with most 3/8-inch hoses. Includes a 1/4-inch brass barb for broader compatibility.
- **Lockable Switch Handle:** The handle includes a locking mechanism for continuous spraying, reducing hand fatigue during extended use.
- **Extended Reach:** The 36-inch length provides extended reach, minimizing the need to bend over during spraying tasks.



Image: Comparison highlighting the durable stainless steel construction of the VANPET sprayer wand against a typical plastic alternative.

Package Contents

Verify that all items are present in the package:

- 1 x VANPET 36-Inch Sprayer Wand
- 1 x 3/8-inch Brass Barb
- 1 x 1/4-inch Brass Barb
- 2 x Hose Clamps



Image: The complete VANPET 36-inch sprayer wand assembly, including the handle, stainless steel shaft, nozzle, and separate brass barbs with hose clamps.

Setup Instructions

1. **Prepare the Hose:** If replacing an existing wand, cut the hose cleanly to ensure a smooth connection point.
2. **Attach Hose Clamps:** Slip the two provided hose clamps onto the end of your sprayer hose.
3. **Select Brass Barb:** Choose the appropriate brass barb (3/8-inch or 1/4-inch) that matches your sprayer hose diameter.
4. **Insert Barb into Hose:** Firmly insert the selected brass barb into the end of the sprayer hose. Ensure it is fully seated.
5. **Connect Wand to Barb:** Insert the new sprayer wand's inlet into the brass barb.
6. **Secure Connection:** Slide the hose clamps over the hose and barb connection points. Use a screwdriver to tighten the clamps securely, preventing leaks.

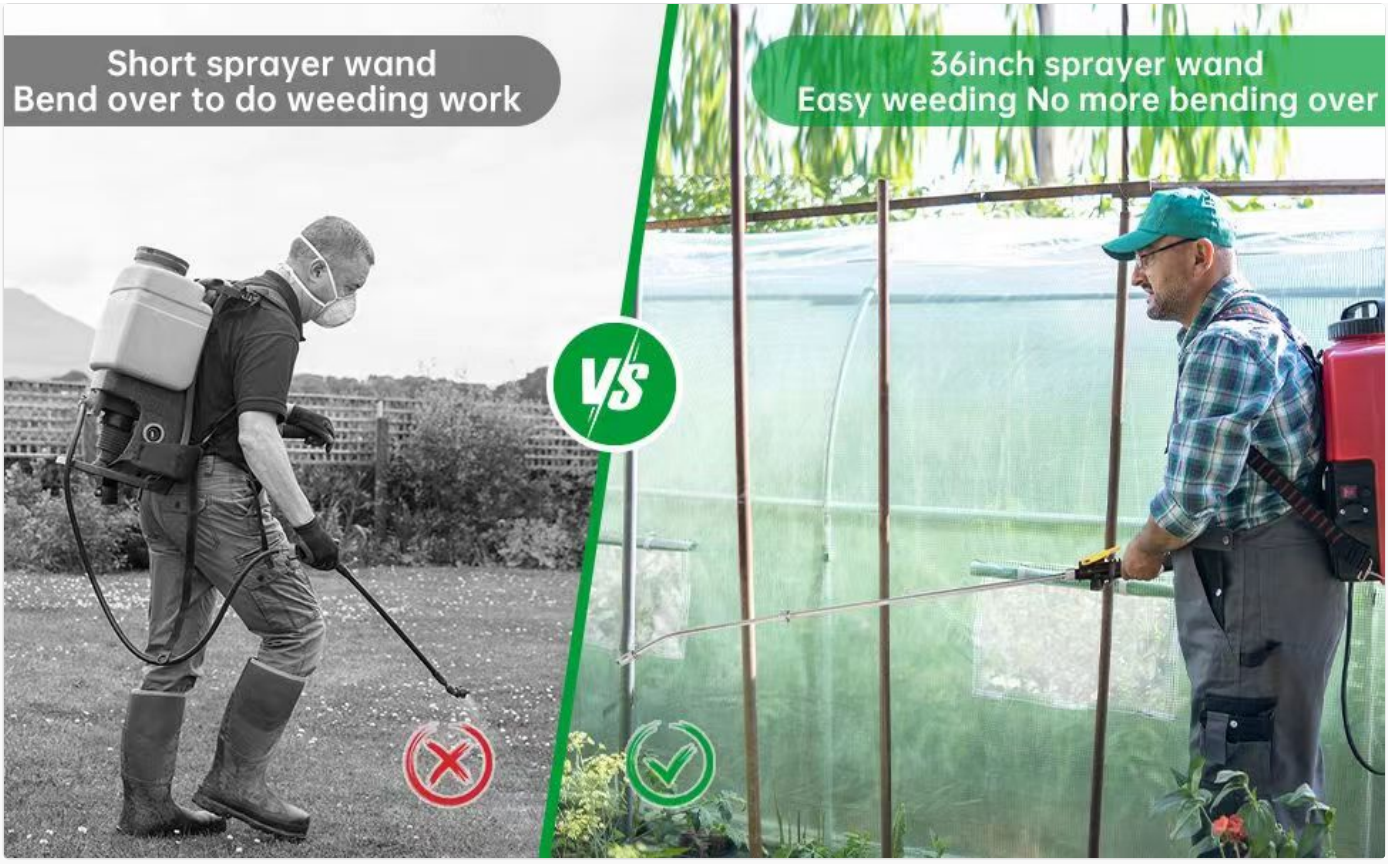


Image: Close-up demonstrating how to connect the 1/4-inch and 3/8-inch brass barbs to a sprayer hose, highlighting the secure fit.

Operating Instructions

Adjusting the Spray Pattern

The sprayer wand features an adjustable nozzle to suit various spraying tasks:

- To change the spray pattern, gently rotate the nozzle tip.
- Rotate clockwise for a finer mist spray.
- Rotate counter-clockwise for a more concentrated, straight stream.



Image: Visual guide illustrating the rotation of the nozzle to achieve different spray patterns, from a wide mist to a narrow stream.

Using the Lockable Switch Handle

The handle is equipped with a lockable switch for continuous operation:

- **To Lock for Continuous Spray:** Press the trigger handle and then push the yellow locking tab forward until it clicks into place. This will keep the spray engaged without needing to hold the trigger.
- **To Release/Stop Spray:** Push the yellow locking tab backward to disengage the lock. The trigger will return to its original position, stopping the spray.

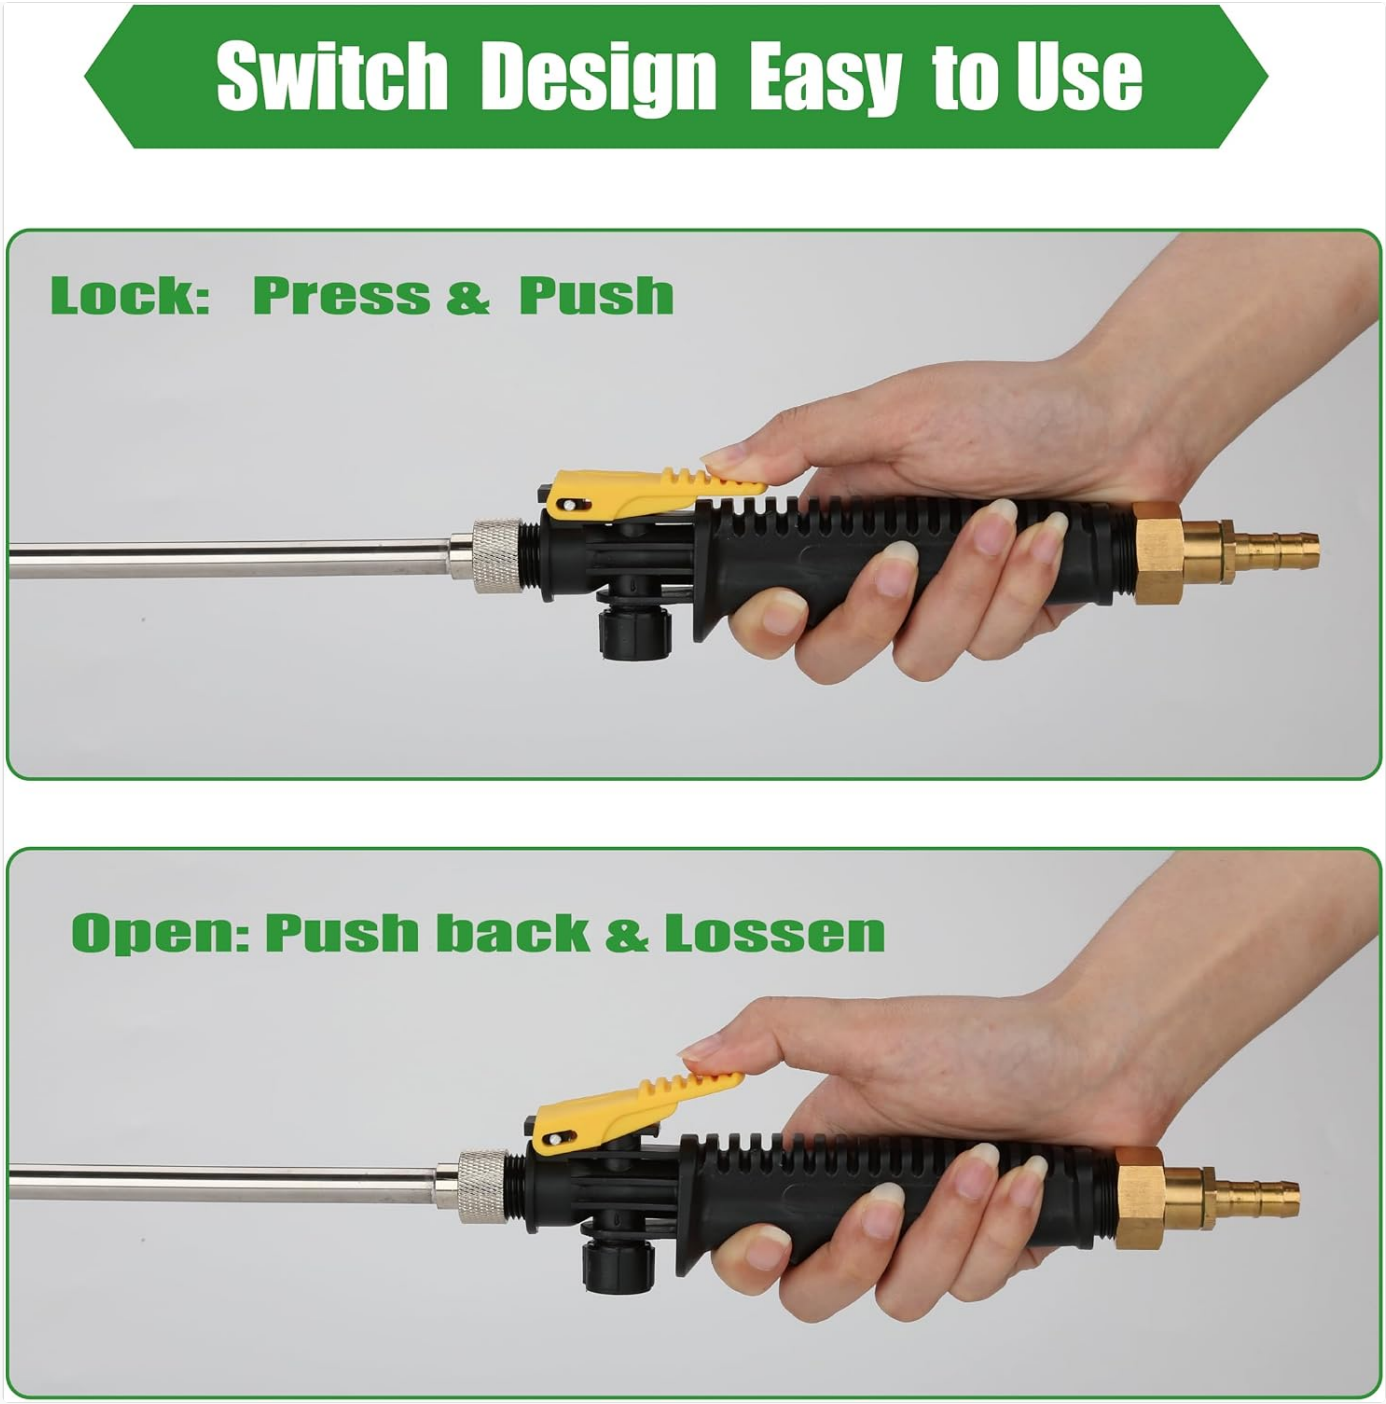


Image: Step-by-step visual demonstrating how to engage the lockable switch for continuous spraying and how to release it.

Maintenance

- **Nozzle Cleaning:** The nozzle can be removed for cleaning. Regularly inspect the nozzle for clogs and rinse it with clean water after each use, especially when spraying chemicals.
- **General Cleaning:** Wipe down the stainless steel wand with a damp cloth to remove any residue. Avoid abrasive cleaners that could scratch the surface.
- **Storage:** Store the sprayer wand in a clean, dry place, away from extreme temperatures. Ensure all liquid is drained from the wand before storage to prevent freezing damage.

Troubleshooting

- **Leaks at Connection Points:** If leaks occur where the wand connects to the hose or barb, ensure the hose clamps are tightened sufficiently. Check that the brass barb is fully inserted into the hose and the wand is securely attached.

Inspect the green O-ring on the barb for damage.

- **No Spray or Weak Spray:** Check if the nozzle is clogged. Remove and clean the nozzle. Ensure there is sufficient pressure from your sprayer pump. Verify that the hose is not kinked.
- **Inconsistent Spray Pattern:** Rotate the nozzle to ensure it is not partially clogged or improperly adjusted. Clean the nozzle if necessary.

Specifications

Attribute	Specification
Brand	VANPET
Model Number	Barb
Material	Stainless Steel
Exterior Finish	Stainless Steel
Item Dimensions (L x W x H)	36 x 4 x 1.5 inches
Item Weight	8.4 ounces
Inlet Connection Type	3/8" or 1/4" hose
Number of Ports	1

Warranty and Support

For warranty information or technical support, please contact VANPET customer service through the retailer where the product was purchased. Please have your purchase receipt and product model number (Barb) available when contacting support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0C5HB7CXF

More documents and user manuals: **https://manuals.plus/**