



Manuals.plus /

› Faber /

› Faber 75 cm 1500 m³/hr Autoclean Curved Shape Kitchen Chimney Instruction Manual - Model HOOD PRIMUS PLUS ENERGY IN HCSC BK 75

Faber HOOD PRIMUS PLUS ENERGY IN HCSC BK 75

Faber 75 cm Autoclean Curved Shape Kitchen Chimney Instruction Manual

Model: HOOD PRIMUS PLUS ENERGY IN HCSC BK 75

1. INTRODUCTION

This manual provides essential information for the safe and efficient operation, installation, and maintenance of your new Faber 75 cm Autoclean Curved Shape Kitchen Chimney. Please read these instructions thoroughly before using the appliance and retain them for future reference. This chimney is designed to effectively remove smoke, grease, and odors from your kitchen environment.



Figure 1: Front view of the Faber 75 cm Autoclean Curved Shape Kitchen Chimney.

2. SAFETY INSTRUCTIONS

To ensure safe operation, always adhere to the following safety guidelines:

- Ensure the electrical supply matches the voltage specified on the appliance rating label.
- Installation must be performed by a qualified technician in accordance with local regulations.
- Do not operate the chimney without the baffle filters properly installed.
- Regularly clean the baffle filters and oil collector to prevent grease buildup, which can be a fire hazard.
- Do not flambé under the range hood.
- Ensure adequate ventilation in the room when the range hood is used simultaneously with gas or other fuel-burning appliances.
- Keep children away from the appliance during operation and cleaning.
- Disconnect the power supply before any cleaning or maintenance.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- 1 x Faber Kitchen Chimney Unit
- 1 x User Manual
- 1 x Warranty Card
- Installation Accessories (Duct pipe, mounting brackets, screws, etc. - specific items may vary)

4. PRODUCT FEATURES

The Faber HOOD PRIMUS PLUS ENERGY IN HCSC BK 75 chimney incorporates advanced features for enhanced kitchen ventilation:

- **High Suction Power:** 1500 m³/hr capacity for effective smoke and odor removal.
- **Autoclean Technology:** Electro Thermal i-clean technology simplifies maintenance by melting and collecting grease.
- **Gesture Control:** Operate the chimney with simple hand gestures for convenience.
- **Touch Control Panel:** Intuitive touch controls for precise operation.
- **Baffle Filter:** Stainless steel baffle filters efficiently separate grease particles.
- **Low Noise Operation:** Engineered for quiet performance, maintaining a comfortable kitchen environment.
- **LED Lighting:** Integrated LED light with moodlight feature illuminates the cooking area.
- **Built-in Oil Collector:** Collects oil residue for easy disposal.

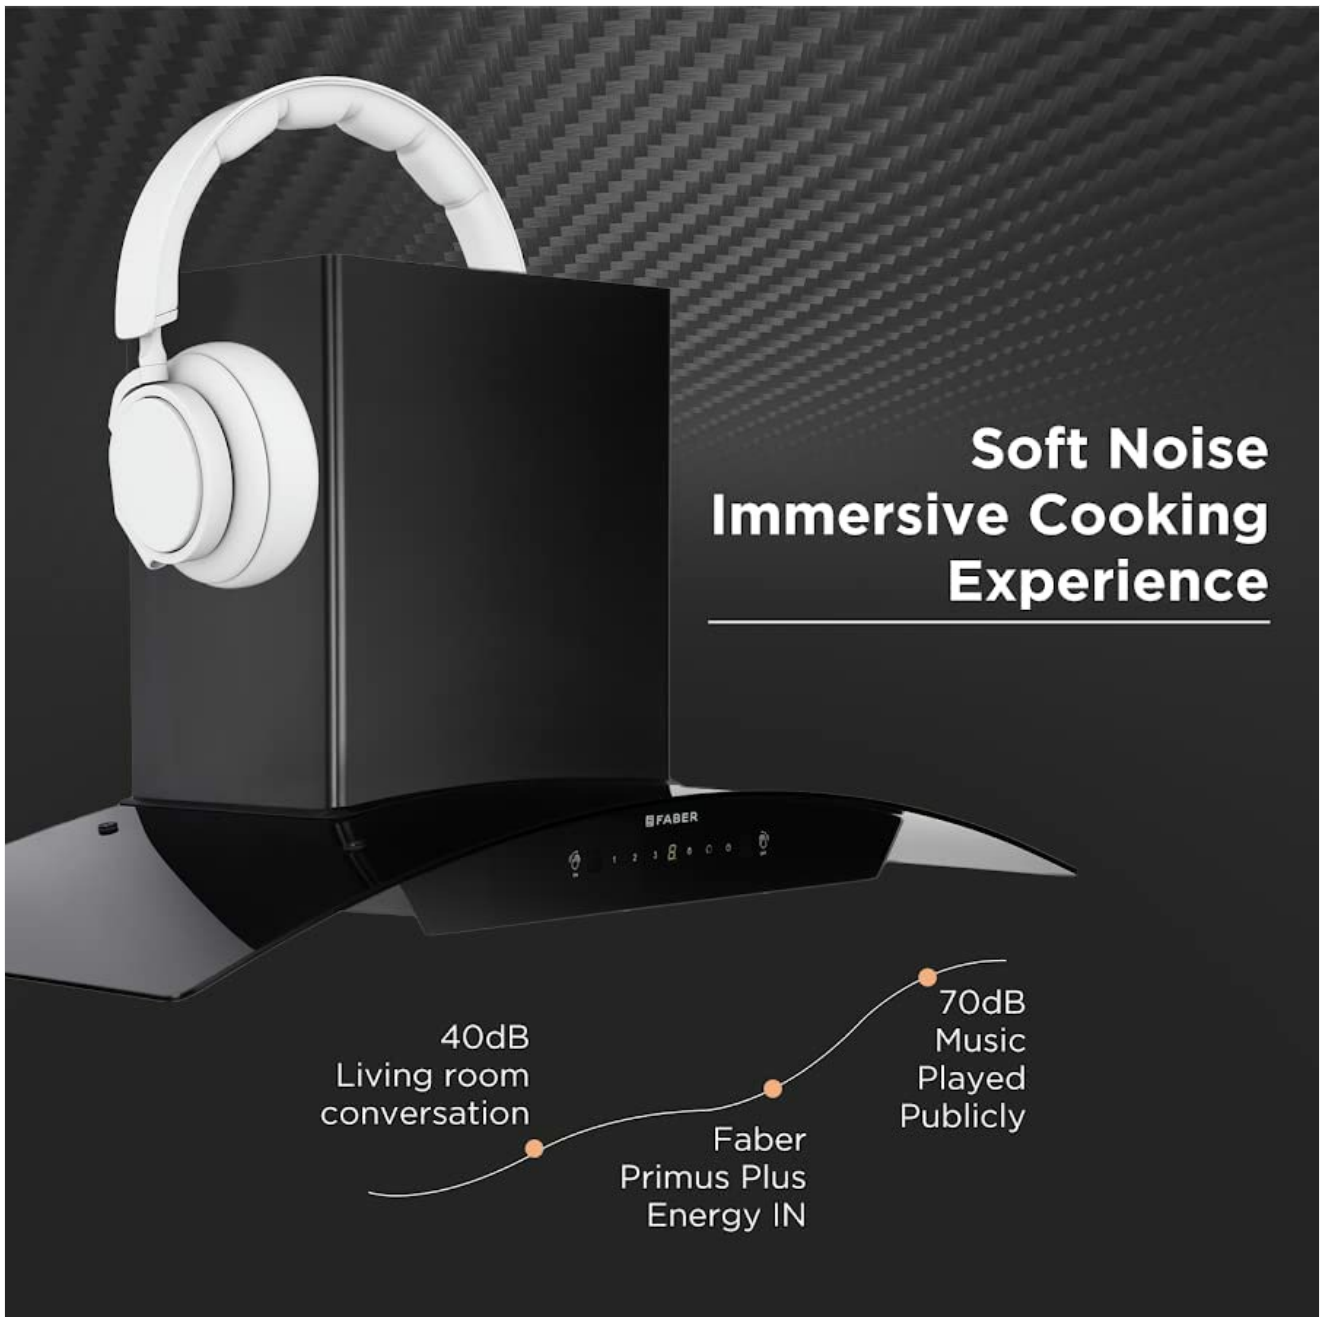


Figure 2: Key features including i-clean technology, gesture control, and high suction power.



Figure 3: Illustration of the chimney's soft noise operation for a quieter cooking experience.

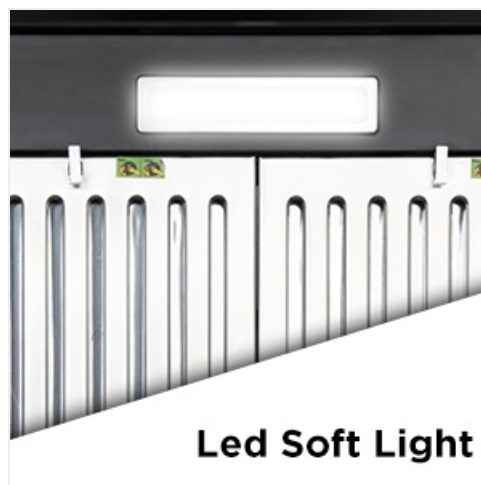


Figure 4: Detail of the integrated LED soft light for illuminating the cooking area.

5. SETUP AND INSTALLATION

The Faber HOOD PRIMUS PLUS ENERGY IN HCSC BK 75 is a wall-mounted chimney designed for ducted ventilation. Professional installation is highly recommended to ensure proper functioning and safety.

5.1 Pre-Installation Checks

- Ensure the wall is strong enough to support the chimney's weight.
- Verify the availability of a suitable electrical outlet.
- Confirm the ducting route is clear and meets required specifications.

5.2 Installation Procedure (Summary)

1. Mark the drilling points on the wall according to the provided template.
2. Drill holes and insert wall plugs.
3. Mount the chimney body onto the wall using the provided brackets and screws.
4. Connect the duct pipe to the chimney outlet and route it to the exterior vent.
5. Install the baffle filters and oil collector.
6. Connect the chimney to the power supply.

For detailed installation instructions, please refer to the separate installation guide provided with your product or contact Faber customer support.

6. OPERATING INSTRUCTIONS

Your Faber chimney offers multiple control options for ease of use.

6.1 Control Panel Overview



Figure 5: Detailed view of the touch control panel.

6.2 Touch Control

- **Power On/Off:** Touch the power symbol to turn the chimney on or off.
- **Speed Selection:** Use the '1', '2', '3' buttons to select the desired suction speed. '1' is the lowest, '3' is the highest.
- **Light Control:** Touch the light symbol to turn the LED light on or off.
- **Autoclean Activation:** Press the autoclean button (often indicated by a water drop or 'A') to initiate the self-cleaning cycle.

6.3 Gesture Control and Motion Sensor

The chimney can be operated without physical contact using hand gestures:

- **Power On/Off:** Wave your hand from left to right in front of the sensor to turn the chimney on. Wave again to turn it off.
- **Speed Adjustment:** Wave your hand from right to left to increase the fan speed. Repeat to cycle through speeds.



Faber HOOD PRIMUS PLUS ENERGY IN HCSC BK 75

Chimney with gesture touch control panel
& 1500 m³/hr Suction capacity.

Figure 6: Operating the chimney using gesture control.

7. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your chimney.

7.1 Autoclean Function

The Autoclean feature uses heat to melt and collect grease, reducing manual cleaning effort. The chimney is equipped with an Autoclean alarm that notifies you when a cleaning cycle is recommended.

- To activate, press the Autoclean button on the control panel.
- The cycle will run automatically. Once complete, the collected oil will be in the oil collector.
- Empty and clean the oil collector after each Autoclean cycle.



Figure 7: Activating the Autoclean function with I-clean technology.

7.2 Baffle Filter Cleaning

Even with Autoclean, periodic manual cleaning of baffle filters is recommended.

1. Ensure the chimney is switched off and disconnected from power.
2. Carefully unlatch and remove the baffle filters.
3. Wash the filters with warm water and a degreasing detergent. For stubborn grease, soak them for a while.
4. Rinse thoroughly and allow them to dry completely before re-installing.



Figure 8: The stainless steel baffle filters, designed for efficient grease separation.

7.3 Exterior Cleaning

Wipe the exterior surfaces with a soft cloth and mild cleaning solution. Avoid abrasive cleaners or harsh chemicals.

8. TROUBLESHOOTING

Refer to this section for solutions to common issues. If the problem persists, contact customer support.

Problem	Possible Cause	Solution
Chimney does not start	No power supply; Power cord loose; Fuse blown	Check power connection; Ensure cord is secure; Check household fuse/breaker.
Low suction power	Clogged filters; Obstruction in ducting; Incorrect speed setting	Clean baffle filters; Check duct for blockages; Select higher speed.
Excessive noise	Loose parts; Improper installation; Obstruction in fan	Check for loose screws; Ensure correct installation; Inspect fan for foreign objects.
Lights not working	LED bulb failure; Electrical connection issue	Contact service for LED replacement; Check power.
Autoclean not functioning	System error; Insufficient power	Restart chimney; Contact service if error persists.

9. SPECIFICATIONS

Detailed technical specifications for the Faber HOOD PRIMUS PLUS ENERGY IN HCSC BK 75 chimney:

Feature	Specification
Model	HOOD PRIMUS PLUS ENERGY IN HCSC BK 75
Type	Curved Glass, Wall Mounted Chimney
Size	75 cm
Suction Power	1500 m ³ /hr
Filter Type	Baffle Filter (Stainless Steel)
Control Type	Touch Control, Gesture Control, Motion Sensor
Number of Speeds	3
Noise Level	58 dB
Ventilation Type	Ducted/Vented
Light Source	LED (with Moodlight Feature)
Material	Glass
Voltage	220 Volts
Item Weight	12 kg
Dimensions (LxWxH)	75 x 42.5 x 47 Centimeters



Figure 9: Product dimensions for installation planning.

10. WARRANTY AND SUPPORT

Faber provides comprehensive warranty coverage for your peace of mind.

- **Comprehensive Warranty:** 2 Years on the product.
- **Motor Warranty:** 12 Years on the motor.

For installation services, warranty claims, or technical support, please contact Faber customer care:

Customer Service Number: 1800-209-3484



FABER

WARRANTY

**2 Year comprehensive
& 12 years on motor**

Figure 10: Warranty information for the Faber chimney.