

Surface Style 160270WR

Surface Style Peel and Stick Wallpaper

INSTRUCTION MANUAL

Model: 160270WR

INTRODUCTION

Surface Style's Serene Scenes wallpaper features a delicate and charming botanical and scenic print. The beautiful hues give your space a relaxing and welcoming feel. This peel and stick wallpaper is designed for easy transformation of your interior, installing in minutes and serving as an ideal choice for both temporary and permanent projects.

This manual provides detailed instructions for the proper installation, usage, and maintenance of your Surface Style Peel and Stick Wallpaper to ensure optimal results and longevity.

PRODUCT FEATURES

- **Includes:** One (1) peel and stick roll of vinyl wallpaper.
- **Roll Dimensions & Coverage:** Each roll measures 20.5 inches wide by 18 feet long, providing approximately 30.75 square feet of coverage. Features a straight match pattern.
- **High-Quality Material:** Printed on a smooth, high-quality, self-adhesive vinyl for exceptional adhesion.
- **Easy Removal:** Designed to be easily removed without damaging the surface or leaving sticky residue.
- **Durability:** Durable and abrasion resistant.
- **DIY Friendly:** Ideal for both renters and homeowners, allowing for easy style changes.
- **Easy to Clean:** Can be cleaned by wiping down with a damp cloth.

SPECIFICATIONS

Attribute	Value
-----------	-------

Attribute	Value
Material	Vinyl
Color	(Serene Scenes Collection, Willow)
Brand	Surface Style
Style	Garden
Product Dimensions	216"L x 20.5"W
Pattern Match	Straight Match
Theme	Botanical
Is Stain Resistant	Yes
Manufacturer	Surface Style
Number of Packs	1
UPC	849203090407
Number of Items	1
Installation Type	Self-Adhesive
Part Number	160270WR
Item Weight	1.6 pounds
Item Model Number	160270WR
Size	20.5" x 216"
Item Package Quantity	1
Number Of Pieces	1
Coverage	30.75 square feet
Usage	Indoor Use Only
Included Components	1 roll of peel and stick wallpaper

SETUP AND INSTALLATION

Proper surface preparation is crucial for successful wallpaper installation. Follow these steps carefully:

- 1. Surface Preparation:** Prep your surface and clean with a sponge and all-purpose cleaner. Ensure it is completely dry before applying wallpaper. Newly painted surfaces should be left to fully cure for 4 weeks prior to application. Wipe down the surface with a damp cloth prior to installation and allow to fully dry for best results.

2. **Measure and Mark:** Starting from the left corner of the wall, measure 20.5 inches and mark lightly. Use a level to draw a straight vertical line.
3. **Apply First Panel:** Peel back 12 inches of the backing away from the paper. Place the paper at the top, extending 1-2 inches over the ceiling. Peel the backing as you press the paper evenly onto the wall, avoiding any stretching to keep the pattern aligned.
4. **Smooth Out:** With a plastic smoother, work down the strip, in a back and forth motion, pushing out air bubbles and smoothing the wallpaper.
5. **Trim Excess:** Use a ruler and a sharp razor knife to trim the excess at the ceiling and baseboard.
6. **Pattern Alignment:** Align the design by locating the pattern match and repeat. Install the first strip and align the next using match and repeat guidelines. We recommend a slight overlap of 1/16 inch between neighboring panels.

SURFACE STYLE™

PEEL AND STICK WALLPAPER


Easy to apply, easy to remove, endless possibilities



Figure 1: Quick and Simple Installation Steps

Wallpaper Estimator

1. Measure the width of your space in feet, and if covering multiple walls, add the total width of all walls together.
2. Measure the length of the wall from top to bottom
3. Multiply the width by the length

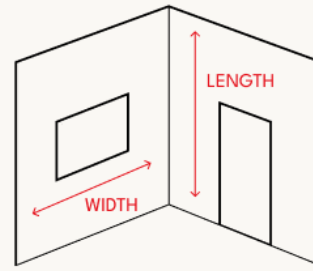

Locate pattern repeat info under roll dimensions & coverage

- If the pattern repeat is 12 inches or less, divide total sq. ft. by 25
- If 13 inches or greater, divide total sq. ft. by 21
- If random, divide total sq. ft. by 30.75
- **To ensure consistent dye lots, order all materials in one purchase**

1 Roll = 30.75 Sq. Ft.

Figure 2: Pattern Alignment for Straight Match

Surfaces to Avoid

This product should **not** be installed on the following surfaces:

- Textured surfaces (including popcorn, sand swirl, and knockdown)
- Plaster
- Non-stick paint
- Existing wallpaper
- Unclean surfaces
- Unpainted drywall
- Outdoor surfaces
- Cinder block or brick

Pattern Alignment

- Align the design by locating the pattern match and repeat.
- Install the first strip and align the next using match and repeat guidelines.
- We recommend a slight 1/16-inch overlap between panels.

Straight Match



Figure 3: Surfaces Not Recommended for Application

OPERATING AND USAGE

Surface Style Peel and Stick Wallpaper is designed for **Indoor Use Only**. Its self-adhesive nature makes it simple to apply, effortlessly repositionable, and easy to remove.

Application Flexibility

- **Easy to Apply:** Simply peel off the backing paper and stick it to a smooth, flat surface.
- **Repositionable:** It can be repositioned or removed without any sticky residue.
- **Flexibility:** Ideal for renters or homeowners who desire to change their style easily.



Figure 4: Serene Scenes Collection, Willow Pattern Detail



Figure 5: Wallpaper in a Nursery Setting



Figure 6: Wallpaper in a Bathroom Setting



Figure 7: Wallpaper in an Entryway Setting



Figure 8: Wallpaper in a Bedroom Setting

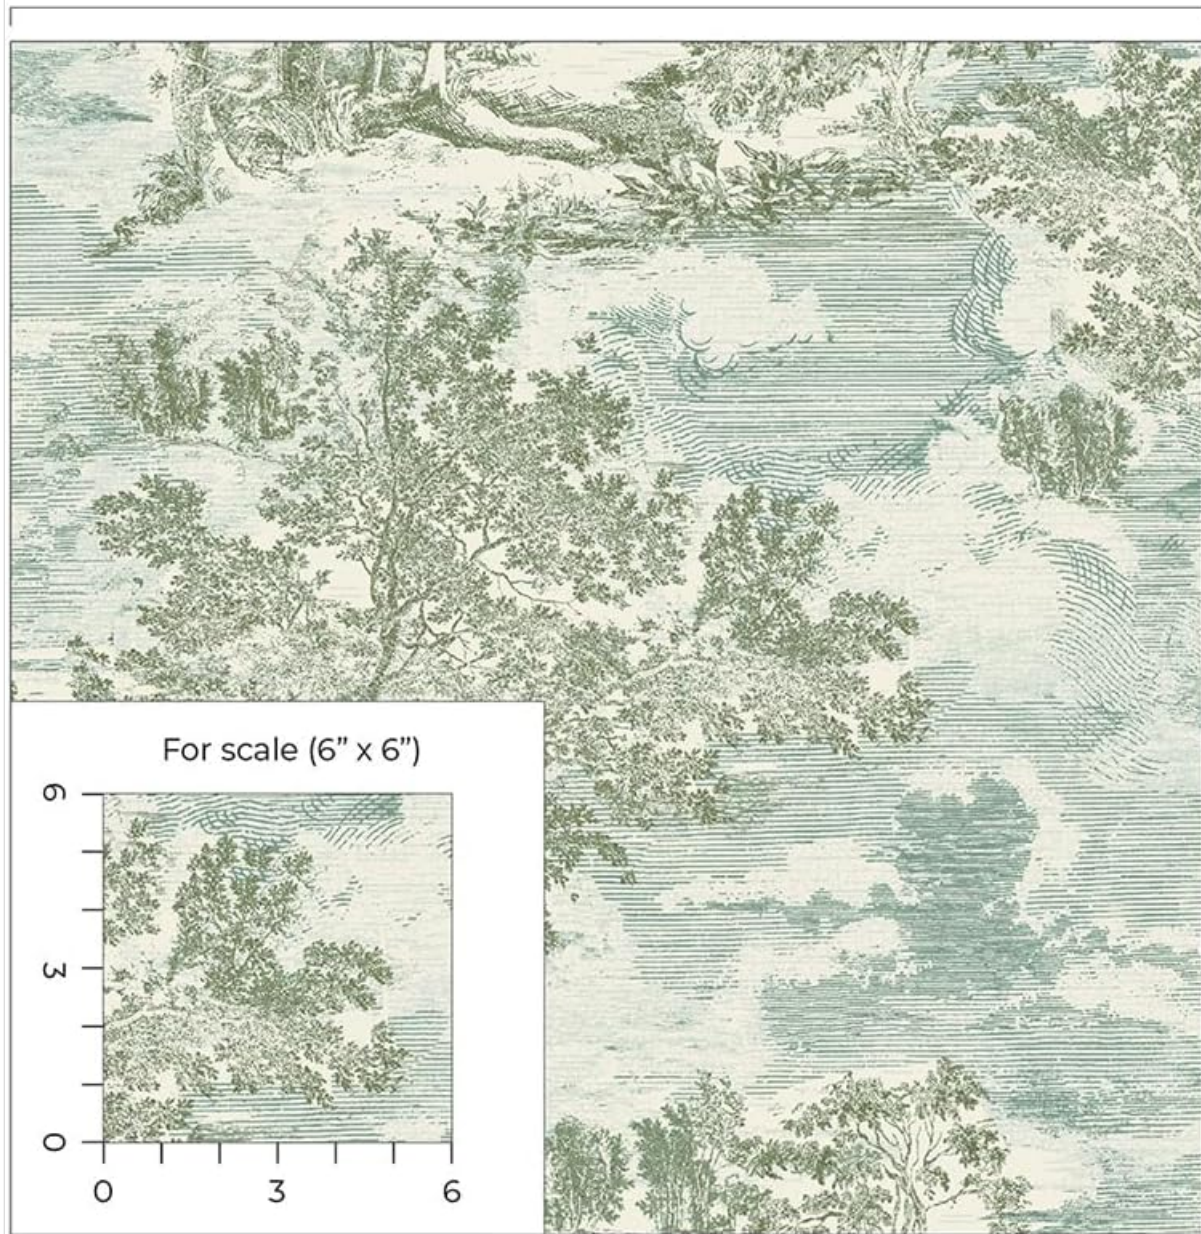


Figure 9: Wallpaper Pattern with Scale

MAINTENANCE

To clean your Surface Style Peel and Stick Wallpaper, simply wipe down the surface with a soft, damp cloth. Avoid using abrasive cleaners or harsh chemicals, as these may damage the vinyl material or the printed design.

TROUBLESHOOTING

Wallpaper Not Sticking or Peeling

If your wallpaper is not adhering properly or begins to peel, consider the following:

- **Surface Cleanliness:** Ensure the wall surface was thoroughly cleaned and completely dry before application. Dust, dirt, or grease can prevent proper adhesion.
- **Surface Type:** Verify that the wallpaper was applied to a smooth, non-textured, and appropriate surface as outlined in the "Surfaces to Avoid" section. Textured or porous surfaces can significantly reduce

adhesion.

- **Paint Curing Time:** If applied to a newly painted wall, confirm that the paint had at least 4 weeks to fully cure before wallpaper application. Applying to uncured paint can lead to adhesion issues.
- **Application Technique:** Ensure that the wallpaper was smoothed out thoroughly during application to remove all air bubbles and ensure full contact with the wall. Use a plastic smoother for best results.
- **Environmental Factors:** Extreme temperature fluctuations or high humidity in the room can sometimes affect adhesion. Ensure the room environment is stable during and after application.

If issues persist after reviewing these points, professional assistance may be required to assess the specific conditions of your installation.

WARRANTY AND SUPPORT

This product is subject to Amazon's standard return policy, which typically allows for returns within 30 days of receipt for a refund or replacement. For specific details regarding your purchase, please refer to your Amazon order history or contact Amazon Customer Service.

Direct manufacturer contact information for support or warranty claims beyond Amazon's return policy is not provided through this product listing. For further assistance, please consult the Surface Style brand store on Amazon or refer to any documentation included with your product packaging.