

DIGIQUEST COMODO 9000BTU

DIGIQUEST COMODO 9000BTU Portable Air Conditioner

User Manual

[Introduction](#)[Safety Information](#)
[Troubleshooting](#)[Components](#)
[Specifications](#)[Setup](#)[Operation](#)
[Warranty & Support](#)[Maintenance](#)

1. INTRODUCTION

This manual provides essential information for the safe and efficient use of your DIGIQUEST COMODO 9000BTU Portable Air Conditioner. This versatile unit offers 4-in-1 functionality: cooling, heating, dehumidification, and fan operation. It is designed for rooms up to 20 square meters and features a compact design with 360° wheels for easy mobility. Please read this manual thoroughly before installation and operation, and retain it for future reference.

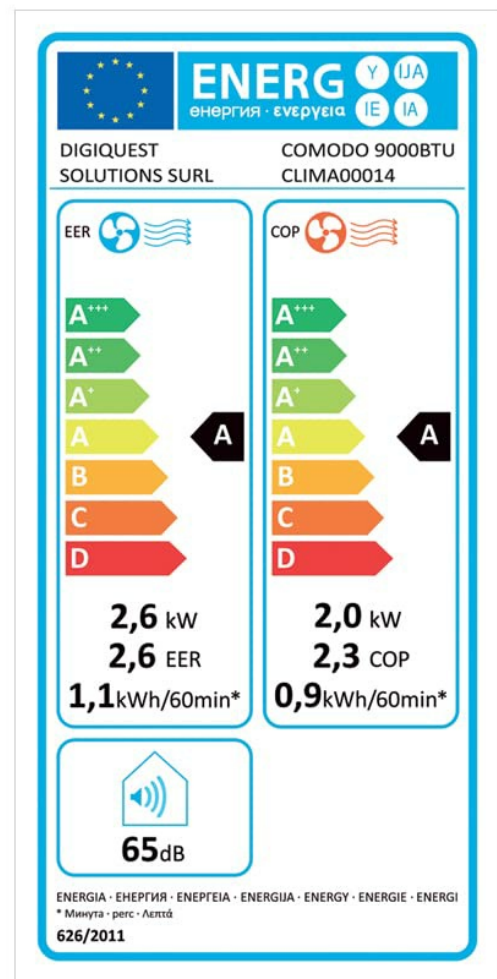


Image 1.1: The DIGIQUEST COMODO 9000BTU Portable Air Conditioner, a compact unit with a top control panel and front air vents.

2. SAFETY INFORMATION

Always follow basic safety precautions when using electrical appliances to reduce the risk of fire, electric shock, and injury.

- Ensure the power supply matches the voltage specified on the unit's rating label.
- Do not operate the unit with a damaged cord or plug. If damaged, contact qualified service personnel.
- Keep the appliance away from heat sources, direct sunlight, and flammable materials.
- Do not insert objects into the air inlet or outlet.
- Always unplug the unit before cleaning or servicing.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Ensure the unit is placed on a flat, stable surface to prevent tipping.
- The exhaust hose length should be between 28 cm and 150 cm. Avoid excessive bends to ensure

efficient operation.

3. PRODUCT COMPONENTS

The DIGIQUEST COMODO 9000BTU Portable Air Conditioner comes with the following accessories:

- Window sliding kit
- 1.5m extendable exhaust hose
- Window side extendable hose connector
- Portable air conditioner side extendable hose connector
- Remote control
- Drain hose



Image 3.1: Components of the window kit, including the adjustable window plate and hose connectors.



Image 3.2: The transparent drain hose used for continuous drainage in dehumidification mode.

4. SETUP AND INSTALLATION

Follow these steps for proper installation of your portable air conditioner:

1. Install the Window Kit:

- Adjust the length of the window plate to fit your window opening.
- Open the window and place the plate on the sill, then close the window to secure it.

2. Install the Exhaust Hose:

- Attach the round connector to the air outlet at the rear of the air conditioner.
- Insert the extendable hose into the round connector.
- Insert the other end of the hose into the installed window kit.

3. Position the Appliance:

- Place the air conditioner on a flat, stable surface.
- Leave at least 50 cm of space around the unit to ensure good air circulation.
- Plug the unit into an adequate power outlet.

INSTALLATION FACILE

Prêt à l'emploi en quelques étapes simples



Image 4.1: Visual guide for easy installation, showing the window kit, exhaust hose connection, and recommended clearances.

Important Note:

The length of the exhaust hose should be between 28 cm and 150 cm. Avoid excessive bends in the hose to maintain optimal performance and prevent noise.

5. OPERATING INSTRUCTIONS

Your DIGIQUEST COMODO 9000BTU offers multiple operating modes and features for your comfort.

Control Panel and Remote Control

The unit can be controlled via the LED display on the top panel or the included remote control.



Image 5.1: Detailed view of the unit's control panel with various function buttons and LED display.

Operating Modes (4-in-1)

- **Cooling Mode (Freddo):** Provides 9000 BTU of cooling capacity. Adjust the temperature between 16°C and 30°C.
- **Heating Mode (Caldo):** Provides 7000 BTU of heating capacity. Adjust the temperature between 16°C and 30°C.
- **Dehumidification Mode (Umidificatore):** Removes up to 42 liters of moisture per day. The fan operates at low speed.
- **Fan Mode (Ventilatore):** Circulates air with two fan speeds (350m³/h).

Additional Features

- **24h Timer:** Set the unit to turn on or off automatically within a 24-hour period.
- **Night Mode (Modalità Notte):** Operates at a quieter level and with reduced energy consumption for comfortable sleep.
- **Full Tank Indicator:** An LED indicator illuminates when the water tank is full, requiring drainage.
- **Directional Air Louvers:** Manually adjust the louvers to direct airflow.

6. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your air conditioner.

Cleaning the Air Filter

The unit features an easy-to-wash anti-dust filter. Clean it regularly to maintain air quality and efficiency.

1. Always unplug the unit from the power outlet before cleaning.
2. Locate the air filter (usually at the back or side of the unit).
3. Remove the filter carefully.
4. Wash the filter with lukewarm water and a mild detergent. Rinse thoroughly.

5. Allow the filter to dry completely before reinserting it into the unit.

Draining the Water Tank

In dehumidification mode or high humidity conditions, the internal water tank may fill up. The 'FULL' indicator light will illuminate. Drain the water as follows:

1. Turn off and unplug the unit.
2. Place a shallow pan or container under the drain outlet (usually at the bottom rear of the unit).
3. Remove the drain plug.
4. Allow all water to drain out.
5. Replace the drain plug securely.

For continuous drainage in dehumidification mode, attach the provided drain hose to the continuous drain outlet.

7. TROUBLESHOOTING

If your air conditioner is not cooling correctly or experiencing other issues, check the following conditions:

FAITES CES ÉTAPES / VÉRIFIEZ CES CONDITIONS POUR QUE LE CLIMATISEUR RAFRAÎCHISSE CORRECTEMENT.



1 TEMPÉRATURE ADAPTÉE

Réglez entre 24 et 27 °C.
Ajustez progressivement
si nécessaire.



2 TUYAU D'ÉVACUATION BIEN INSTALLÉ

Assurez-vous qu'il est correctement
inséré dans son logement.



3 PAS D'EXPOSITION DIRECTE AU SOLEIL

Évitez la lumière solaire directe
sur l'appareil.



4 AUCUNE PORTE, FENÊTRE OU SOURCE DE CHALEUR

Gardez tout fermé et éloignez
le climatiseur des sources de chaleur.



5 NETTOYEZ LE FILTRE

Nettoyez régulièrement le filtre
pour un air propre et une efficacité
optimale.




6 DÉGAGEZ LES ENTRÉES ET SORTIES D'AIR

Assurez-vous qu'elles ne sont pas
obstruées par la poussière ou des objets.

POUR QUE LE CLIMATISEUR RAFRAÎCHISSE CORRECTEMENT.

Le respect de ces conditions garantit un fonctionnement
optimal et prolonge la durée de vie de votre appareil.



UN BON ENTRETIEN ET LES BONNES CONDITIONS = PLUS D'EFFICACITÉ, PLUS DE FRAÎCHEUR, PLUS DE CONFORT.

Image 7.1: Visual checklist for ensuring proper cooling performance, including temperature settings, hose installation, and filter cleanliness.

1. **Adapted Temperature:** Set the temperature between 24°C and 27°C. Adjust gradually if necessary.
2. **Exhaust Hose Properly Installed:** Ensure the exhaust hose is correctly inserted and sealed in the window kit.
3. **No Direct Sun Exposure:** Avoid direct sunlight on the appliance.
4. **No Open Doors, Windows, or Heat Sources:** Keep all doors and windows closed and move the air conditioner away from heat sources.
5. **Clean the Filter:** Regularly clean the filter for clean air and optimal efficiency.
6. **Clear Air Inlets and Outlets:** Ensure they are not obstructed by dust or objects.

For optimal performance and reduced noise:

- Ensure the unit is on a flat, stable surface.
- Keep doors and windows closed to prevent warm air entry.
- Install the exhaust hose correctly, avoiding kinks or tight bends.
- Adjust the temperature gradually to avoid overworking the compressor, which can increase noise.

If problems persist after checking these points, please contact customer support.

8. SPECIFICATIONS

Feature	Specification
Model Name	CLIMA PORTATILE COMODO 9000 BTU R290
Model Number	CLIMA00014
Cooling Capacity	9000 BTU
Heating Capacity	7000 BTU
Functions	Cooling, Heating, Dehumidification, Fan
Dehumidification Capacity	Up to 42 Liters/day
Fan Speeds	2
Air Flow Volume	350 m³/h
Recommended Room Size	Up to 20 m²
Dimensions (D x W x H)	36P x 37I x 71H cm
Weight	2 kg
Noise Level	65 Decibels
Refrigerant	R290 (Propane)
Voltage	220 Volt
Power Consumption (Cooling)	2.6 kW

Power Consumption (Heating)	2.0 kW
Energy Efficiency Class	A
Control Method	Remote Control, On-unit Display
Filter Type	Prefilter



Image 8.1: Diagram showing the dimensions of the portable air conditioner: 71cm height, 36cm depth, 37cm width.

9. WARRANTY

This product comes with a **2-year limited warranty**. Please retain your proof of purchase for warranty claims. The warranty covers manufacturing defects under normal use conditions.

10. CUSTOMER SUPPORT

DIGIQUEST offers dedicated customer support throughout Italy. For assistance, troubleshooting, or warranty inquiries, please refer to the contact information available on our official website and social media channels.

You can also find additional resources and frequently asked questions on the [DIGIQUEST Amazon Store](#).