

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [TECETOOL](#) /

› [TECETOOL Dual Flush Valve Replacement Button User Manual](#)

TECETOOL button002 (45mm height)

TECETOOL Dual Flush Valve Replacement Button User Manual

Model: button002 (45mm Height)



1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your TECETOOL Dual Flush Valve Replacement Button. Designed specifically for Roca toilets, this replacement button ensures efficient and reliable flushing performance. Please read this manual thoroughly before installation to ensure proper function and longevity of the product.



Figure 1: TECETOOL Dual Flush Valve Replacement Button with its components.

2. PACKAGE CONTENTS

Upon opening the package, please verify that all the following components are included. Due to the large number of parts, please be careful when opening the package to avoid losing any accessories.

- 1 x Toilet Push Button (main body)
- 1 x Moon-shaped button (for half flush)
- 1 x Sun-shaped button (for full flush)

- 2 x Button Rods (45mm length)
- 1 x Black Screw (29mm)
- 1 x Plastic Button Screwdriver



Figure 2: All components included in the package.

3. COMPATIBILITY

This TECETOOL Dual Flush Valve Replacement Button is specifically designed for Roca toilets with a top push button mechanism. It is compatible with the Roca AH0004800R flush valve and is equivalent to the Roca push button AH0002000R.

Important Note:

- Please ensure your original dual push flushing toilet button style is consistent with this product before purchase.
- This button is not a universal fit and only works with the specified Roca flush valve models.
- Measure the length of your original toilet tank button and purchase according to your original accessory size. This product features a 45mm button body length and 45mm button rods.



Figure 3: Visual guide for compatible flush valve types. The replacement button is only applicable to the two flush valves shown on the right.



Figure 4: Key dimensions of the 45mm button and its components. Thread diameter is 48mm (1.89 inches), button body length is 45mm (1.7 inches), and button rods are 45mm (1.7 inches).

4. SETUP AND INSTALLATION

The TECETOOL Dual Flush Valve Replacement Button is designed for simple and fast installation. Follow these steps carefully:

- 1. Prepare the Toilet:** Ensure the toilet tank is empty and dry. If replacing an existing button, carefully remove the old button assembly.
- 2. Assemble the Button Rods:** The button rods have a total length of 45mm. If necessary, you can cut the length of the button rods to fit your specific toilet tank depth. Use the provided plastic button screwdriver for adjustment if needed.
- 3. Insert Button Rods:** Insert the two button rods into their respective slots on the underside of the main button body. Ensure they are securely seated.
- 4. Attach Moon and Sun Buttons:** Place the moon-shaped and sun-shaped button caps onto the top of the main button body, aligning them correctly for the dual flush function.
- 5. Position the Button:** Carefully place the assembled button into the opening on the top of your toilet tank lid.
- 6. Secure with Screw:** From the underside of the toilet tank lid, use the black screw to secure the button assembly in place. Tighten gently to avoid overtightening.
- 7. Test Functionality:** Once installed, refill the toilet tank and test both the full flush and half flush functions to ensure smooth operation and proper water flow.



Figure 5: The 45mm button correctly installed on the flush valve mechanism.

5. OPERATING INSTRUCTIONS

Your TECETOOL Dual Flush Valve Replacement Button provides two flushing options for water conservation:

- **Quick Flush (Half Flush):** Press the smaller, moon-shaped button (typically for liquid waste). This uses approximately 3 liters of water.
- **Full Flush:** Press the larger, sun-shaped button (typically for solid waste). This uses approximately 6 liters of water.

Choose the appropriate flush volume based on your needs to optimize water usage.

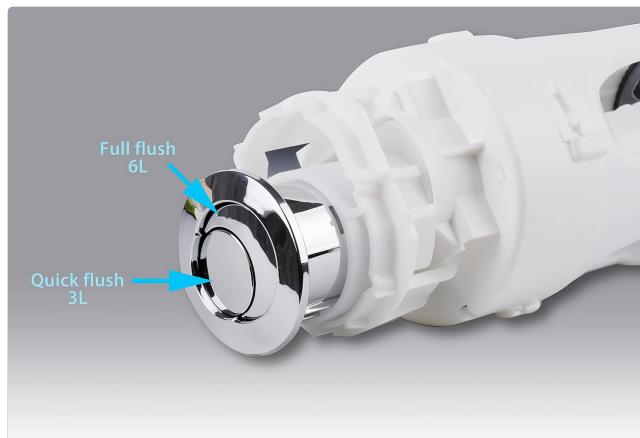


Figure 6: Indication of quick flush (3L) and full flush (6L) options on the dual flush button.

6. MAINTENANCE

The TECETOOL Dual Flush Valve Replacement Button features high-end plating technology and a multi-layer plating process, ensuring a high brightness and ultra-smooth surface for long-lasting durability and appearance.

- **Cleaning:** To maintain the finish, wipe the button regularly with a soft, damp cloth. Avoid using abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the silver-plated surface.
- **Inspection:** Periodically check the button for any signs of wear or damage. Ensure the button rods move freely and are not obstructed.
- **Disassembly (if needed):** The button is designed to be easy to disassemble. If you need to access the internal components for cleaning or adjustment, carefully follow the reverse of the installation steps.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Button does not press down smoothly or gets stuck.	Button rods are too long or misaligned; debris under the button.	Remove the button, check the length of the button rods and trim if necessary. Clean any debris from around the button mechanism. Ensure proper alignment during reassembly.

Problem	Possible Cause	Solution
Incomplete flush or no flush.	Button rods are too short or not making proper contact with the flush valve.	Ensure button rods are long enough to fully actuate the flush valve. Verify the button is securely installed and not loose. Confirm compatibility with your specific Roca flush valve model (AH0004800R).
Water continues to run after flushing.	Flush valve not sealing properly; button not returning to original position.	Check if the button is fully returning to its resting position. If not, ensure no obstructions. Inspect the flush valve itself for issues (e.g., worn seal, debris). This button is a replacement for the push mechanism, not the flush valve itself.
Missing parts upon unboxing.	Parts are in bulk and can be easily misplaced.	Carefully check all packaging materials. If parts are genuinely missing, contact TECETOOL customer support immediately.

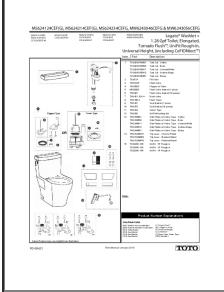
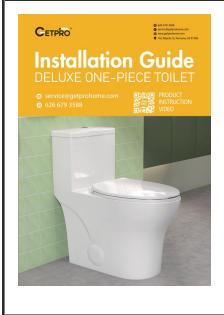
8. SPECIFICATIONS

Feature	Detail
Model Number	button002
Button Body Length	45mm (1.77 inches)
Thread Diameter	48mm (1.89 inches)
Material	Acrylonitrile Butadiene Styrene (ABS)
Exterior Finish	Silver Plated
Color	Silver
Valve Type Compatibility	Dual Flush Valve (Roca AH0004800R)
Item Weight	0.704 ounces
Package Dimensions	3.35 x 2.91 x 1.81 inches

9. WARRANTY AND SUPPORT

For information regarding product warranty, returns, or technical support, please refer to the purchase documentation or contact TECETOOL customer service directly through the retailer where the product was purchased. Please have your model number (button002) and purchase date ready when contacting support. For further assistance, you may visit the official TECETOOL store on Amazon:[TECETOOL Store](#)

Related Documents - button002 (45mm height)

	<p>TOTO Legato® Washlet+ Toilet: Parts Manual and Specifications Detailed parts manual and product information for the TOTO Legato® Washlet+ 1.28 Gpf Elongated Toilet with Tornado Flush™, UniFit Rough-In, and CeFiONtect™ technology. Includes model numbers and part explanations.</p>
	<p>GETPRO Deluxe One-Piece Toilet Installation Guide and Warranty Comprehensive installation instructions, safety guidelines, and limited warranty details for the GETPRO Deluxe One-Piece Toilet. Includes tools required and step-by-step assembly.</p>
	<p>TOTO Aquia IV 1G WASHLET+ S550e Toilet - Model MW4463056CUMFG(A) Specifications Detailed specifications and features for the TOTO Aquia IV 1G WASHLET+ S550e dual-flush toilet (Model MW4463056CUMFG(A)), including DYNAMAX TORNADO FLUSH, CEFIONTECT glaze, and universal height.</p>
	<p>Kohler Toilets, Seats & Bidets: Performance, Design, and Water Conservation Explore Kohler's comprehensive range of high-performance toilets, comfortable seats, and hygienic bidets. Discover innovative designs, water-saving technologies, and historical milestones from Kohler Co.</p>
	<p>NTQ N-BT-151R-OPT One Piece Toilet Installation Manual Comprehensive installation guide for the NTQ N-BT-151R-OPT one-piece toilet. This manual provides step-by-step instructions, safety precautions, required tools, and warranty information for installing your new toilet.</p>
	<p>ZEAFINE ZVBL-137-OPT 1-Piece Toilet Installation Guide & Warranty Comprehensive installation instructions and warranty details for the ZEAFINE ZVBL-137-OPT 1-piece dual flush toilet. Learn how to properly install your new toilet.</p>