Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Quictent 6601

Quictent 13'x20' Retractable Carport Garage Instruction Manual

Model: 6601

1. Introduction

Thank you for choosing the Quictent 13'x20' Retractable Carport Garage. This manual provides essential instructions for the safe and efficient assembly, operation, and maintenance of your new carport. Please read this manual thoroughly before beginning assembly and retain it for future reference.

2. Safety Information

- **Weather Conditions:** This carport is designed for temporary shelter. It is recommended to retract or dismantle the structure during severe weather conditions such as heavy winds, snowstorms, or extreme rainfall to prevent damage to the carport and potential hazards.
- **Anchoring:** Always ensure the carport is properly anchored to the ground using stakes or weights to prevent it from being lifted or moved by wind.
- **Assembly:** Assembly requires at least two adults. Use appropriate safety gear, such as gloves and eye protection. Ensure all connections are secure before use.
- **Clearance:** Maintain adequate clearance around the carport to avoid obstruction and ensure safe operation of the retractable frame.
- **Fire Safety:** Keep all heat sources and open flames away from the carport fabric.

3. Package Contents

Please refer to the packing list included with your product for a complete inventory of all components. Verify that all parts are present and undamaged before beginning assembly. If any parts are missing or damaged, contact Quictent customer support.

4. Setup and Assembly

The Quictent Retractable Carport features a robust design for ease of setup and stability. While the assembly process is generally straightforward, it is highly recommended to have at least two people and ladders available for efficient and safe installation. Carefully review all diagrams and instructions provided in the physical manual.

4.1 Frame Assembly

The carport utilizes a retractable X-shaped steel frame. Begin by laying out all frame components according to the included diagrams. Connect the galvanized steel tubes, ensuring all bolts and fasteners are securely tightened. The frame features 1.53" (39mm) x 0.03" (1mm) thickened galvanized steel pipes for enhanced durability and a top X-shaped reinforcement bar for increased stability.



Figure 1: Retractable frame in unfolded and folded positions. The unfolded state is suitable for market stalls, parties, parking, and boat parking. The folded state is for easy storage and space saving.

4.2 Wheel Attachment

Attach the movable universal wheels to the carport legs. These wheels allow the carport to be easily repositioned on both concrete and grass surfaces. Ensure the locking mechanisms on the wheels are functional and engaged when the carport is in its desired position.

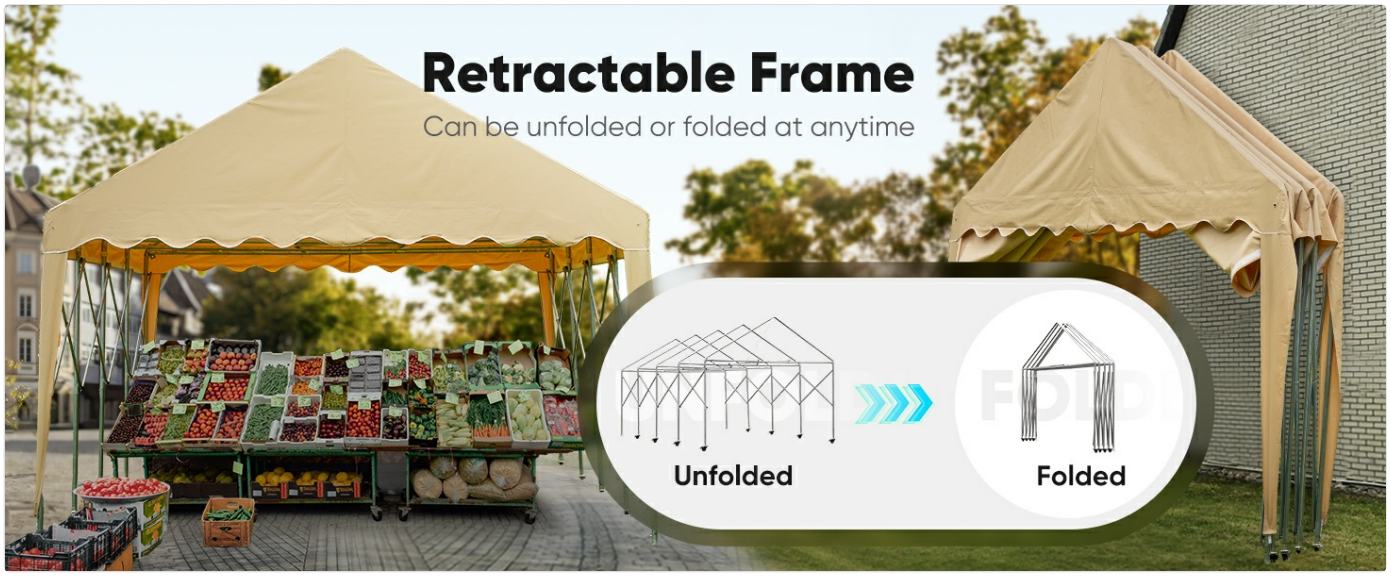


Figure 2: Universal wheels designed for movement on both concrete and grass, featuring 360-degree rotation.

4.3 Cover Installation

Carefully drape the upgraded 420D Oxford fabric cover over the assembled frame. This material is tear-proof, waterproof, and anti-UV. Secure the cover to the frame using the provided fasteners, ensuring it is taut and evenly distributed to prevent water pooling and wind damage.

Your browser does not support the video tag.

Video 1: An instructional video demonstrating aspects of the carport's assembly or features. This video is 26 seconds long.

5. Operating Instructions

5.1 Retracting and Unfolding

To retract the carport, unlock the universal wheels and gently push the frame inwards until it is fully folded. To unfold, pull the frame outwards until it reaches its full extension. Ensure the frame is fully extended and locked into place before parking vehicles or using the carport for other purposes. Lock the universal wheels once the carport is in its desired position.

5.2 Intended Use

This retractable carport is versatile and can be used for various purposes, including:

- Vehicle parking (cars, boats)
- Outdoor storage shed
- Temporary party tent
- Commercial stalls for outdoor events



Figure 3: Examples of the carport's multifunctional uses, such as parking vehicles, creating market stalls, or providing shelter for outdoor gatherings.

6. Maintenance

- **Cleaning the Cover:** Clean the Oxford fabric cover periodically with mild soap and water. Avoid harsh chemicals or abrasive cleaners that could damage the material's waterproof and UV-resistant properties. Allow the cover to dry completely before folding or storing.
- **Frame Inspection:** Regularly inspect the galvanized steel frame for any signs of rust, damage, or loose connections. Tighten any loose bolts and address rust spots promptly to prolong the lifespan of the structure.
- **Wheel Maintenance:** Keep the universal wheels clean and free of debris. Lubricate moving parts as needed to

ensure smooth operation.

- **Seasonal Storage:** For prolonged periods of non-use or during severe weather seasons, it is recommended to retract and store the carport in a dry, protected area.



Figure 4: The carport's fabric is designed to be Anti-UV (effectively resisting UV rays) and Waterproof (PU2000mm).

7. Troubleshooting

Problem	Possible Cause	Solution
Difficulty retracting/unfolding frame	Obstruction, stiff joints, or uneven ground.	Check for debris in the frame mechanism. Lubricate joints if necessary. Ensure the carport is on level ground.

Problem	Possible Cause	Solution
Carport instability	Improper anchoring, loose frame connections, or strong winds.	Ensure all legs are properly anchored. Tighten all frame bolts. Retract the carport during high winds.
Water pooling on cover	Cover not taut, improper frame setup.	Adjust the cover to be taut and evenly distributed. Verify the frame is fully extended and correctly assembled to maintain proper roof pitch.
Wheels not moving smoothly	Debris in wheels, lack of lubrication.	Clean wheels of any dirt or debris. Apply a suitable lubricant to the wheel axles and swivel mechanisms.

8. Specifications

- **Brand:** Quictent
- **Model Number:** 6601
- **Material:** Upgraded 420D Oxford Fabric (Tear-proof, Waterproof, Anti-UV)
- **Frame Material:** Thickened Galvanized Steel Pipe (1.53"/39mm diameter, 0.03"/1mm thickness)
- **Color:** Beige
- **Product Dimensions (L x W x H):**240" x 160" x 125" (20 ft x 13.3 ft x 10.4 ft)
- **Max Ceiling Height:** 125 Inches
- **Item Weight:** Approximately 222 pounds
- **Maximum Snow Load:** 250 KG
- **Recommended Uses:** Carport, Storage Shed, Party Tent, Shelter
- **Assembly Required:** Yes



Figure 5: Key product dimensions and weight, highlighting the all-steel structure for stability and quality.



Figure 6: The carport is shown with snow, illustrating its maximum snow load capacity of 250KG, supported by an all-steel frame and extra-thick roof.

9. Warranty and Support

Quictent provides the following quality assurances for this product:

- **Lifetime Quality Assurance:** Replacement for connectors, pegs, ropes, elastic ropes, and similar accessories.
- **1 Year Quality Assurance:** For covers and poles.

For warranty claims, technical support, or replacement parts, please contact Quictent customer service. Have your model number (6601) and purchase information ready when contacting support.
Visit the Quictent Store on Amazon for more information and contact options.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0C77DC829

More documents and user manuals: **https://manuals.plus/**