

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Petrainer](#) /

› [Petrainer PET916 Dog Training Collar User Manual](#)

Petrainer PET916

Petrainer PET916 Dog Training Collar with Remote

Advanced Rechargeable Training Collar for Dogs

INTRODUCTION

The Petrainer PET916 Dog Training Collar is designed to assist pet owners in training their dogs effectively and humanely. This system features a remote transmitter and a waterproof receiver collar, offering multiple training modes including tone, vibration, and static stimulation. With a long remote range and rechargeable batteries, it provides a reliable solution for correcting unwanted behaviors and reinforcing positive ones.

PACKAGE CONTENTS

- 1 x Remote Transmitter
- 1 x Collar Receiver
- 1 x Adjustable TPU Strap
- 1 x USB Charging Cable
- 1 x Test Bulb
- 3 Sets of Contact Points (short and long)

PRODUCT OVERVIEW



Figure 1: The Pet Trainer PET916 system, showing the remote transmitter and the receiver collar with its adjustable strap.

Remote Transmitter

Antenna: For signal transmission.

LCD Display: Shows battery level, intensity level, and mode.

Mode Button: Cycles through tone, vibration, and static modes.

Up/Down Buttons: Adjusts intensity levels (0-100) for vibration and static modes.

Activation Button (Y): Delivers the selected correction.

Collar Receiver

Contact Points: Deliver static stimulation. Interchangeable for different coat lengths.

Power Button: Turns the receiver on/off.

Charging Port: For recharging the receiver.

Adjustable TPU Strap: Durable and comfortable for various dog sizes.

SETUP GUIDE

1. Charging the Devices

Before first use, fully charge both the remote transmitter and the collar receiver for approximately 2 hours. Use the provided USB charging cable. The devices can be charged simultaneously.



Figure 2: Both the remote and collar receiver can be charged at the same time using the included USB cable.


Important: Do not charge the product in high-temperature environments.

2. Fitting the Collar Receiver

Proper fit of the collar receiver is crucial for effective operation and your dog's comfort. The contact points must have direct contact with your dog's skin. Choose the appropriate contact points (short or long) based on your dog's coat length.

1. Ensure the collar is snug, but not too tight. You should be able to fit two fingers comfortably between the collar strap and your dog's neck.
2. Position the receiver unit centrally on your dog's throat, with the contact points underneath.
3. Regularly check the fit to prevent pressure sores. Do not leave the collar on for more than 12 hours per day.

FOR ALL SIZE OF DOGS

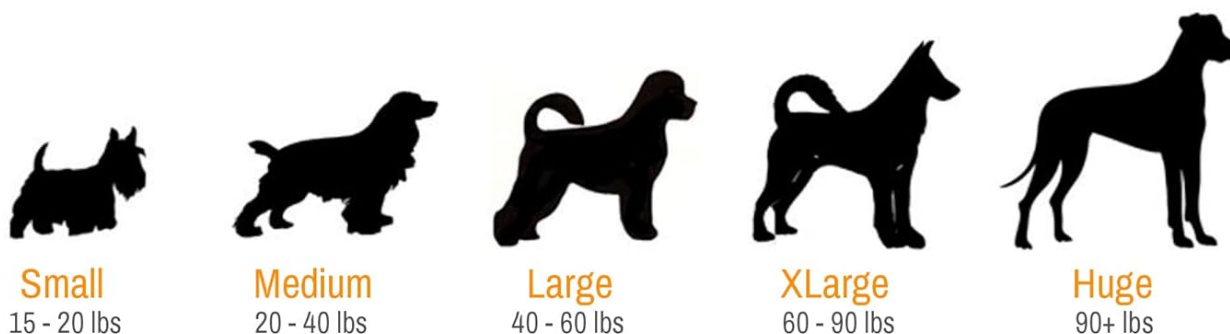

Small
15 - 20 lbs

Medium
20 - 40 lbs

Large
40 - 60 lbs

XLarge
60 - 90 lbs

Huge
90+ lbs

Figure 3: The adjustable TPU strap is 26 inches long, suitable for dogs ranging from small (15-20 lbs) to huge (90+ lbs).

OPERATING INSTRUCTIONS

Training Modes

The PetraTrainer PET916 offers three distinct training modes to suit various training needs and dog temperaments. Use the 'Mode' button on the remote to cycle through them.

Training Steps

01 	 Beep mode Standard Tone
02 	 Vibration mode 0-100 Levels
03 	 Static shock mode 0-100 Levels

Figure 4: Visual representation of the three training modes: Beep, Vibration, and Static Shock.

1. **Beep Mode:** Produces an audible tone. This is often used as an initial warning or for positive reinforcement. It has a standard, non-adjustable tone.
2. **Vibration Mode:** Delivers a non-harmful vibration. This mode has 0-100 adjustable levels, allowing for precise control over the intensity. It's effective for attention-grabbing without static stimulation.
3. **Static Shock Mode:** Provides a static stimulation. This mode also has 0-100 adjustable levels. It should be used cautiously and at the lowest effective level, typically for more stubborn behaviors or as a last resort. Always test the static level on your arm before applying to your dog.

Adjusting Intensity Levels

For Vibration and Static Shock modes, use the Up/Down buttons on the remote to select an intensity level from 0 to 100. Start at the lowest level and gradually increase until your dog responds. The goal is to get your dog's attention, not to cause pain.

Remote Range and Waterproof Feature

The remote control has a range of up to 330 yards (approximately 1000 feet), allowing for training in various environments, including open fields. The collar receiver is 100% waterproof (IPX7 rated), meaning your dog can wear it while swimming or

playing in water without damage.

UP TO 1000FT REMOTE RANGE

Through-the-wall Remote Control



Figure 5: The remote offers a range of up to 1000 feet, allowing control even through walls.

IPX7 100% WATERPROOF



Figure 6: The collar receiver is 100% waterproof, suitable for dogs enjoying water activities.

MAINTENANCE

- **Cleaning:** Wipe down the remote and collar receiver with a damp cloth regularly. Avoid harsh chemicals.
- **Battery Care:** To prolong battery life, avoid fully discharging the devices frequently. Recharge when the battery indicator is low. Store in a cool, dry place if not used for extended periods.
- **Contact Points:** Periodically check the contact points for corrosion or damage. Ensure they are clean and free of debris.
- **Strap Inspection:** Inspect the TPU strap for wear and tear. Replace if damaged to ensure secure fit.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Collar not responding to remote.	Low battery on either device; devices not paired; out of range.	Charge both devices. Ensure they are properly paired (refer to pairing instructions if available, or general pairing steps for similar devices). Move closer to the dog.
No static stimulation.	Contact points not touching skin; intensity level too low; test bulb not working.	Adjust collar fit. Increase intensity level. Use the test bulb to verify static function. Ensure contact points are clean and appropriate length for dog's coat.
Collar turns off unexpectedly.	Low battery; automatic sleep mode.	Recharge the collar. Some models have an automatic sleep mode to conserve battery; press the power button on the collar or activate a function from the remote to wake it up.
Remote display is blank.	Low battery; remote is off.	Charge the remote. Press the power button to turn it on.

SPECIFICATIONS

- Model:** PET916
- Remote Range:** Up to 330 yards (1000 feet)
- Waterproof Rating:** IPX7 (Collar Receiver)
- Battery Type:** Lithium Polymer (included)
- Charging Time:** Approximately 2 hours
- Collar Strap Length:** 26 inches
- Item Weight:** 13.4 ounces
- Material:** Plastic, Thermoplastic Polyurethane
- Target Audience:** Dogs (All Breeds, All Life Stages)



WARRANTY AND SUPPORT

The Pettrainer PET916 Dog Training Collar comes with a **1-Year Warranty**. You can extend this to a **3-Year Warranty** by registering your product after purchase.

For any issues or support inquiries, please contact Pettrainer's US-based Customer Service. Support is available via Phone & Email, 5 Days a Week.

For more information or to register your product, please visit the official Pettrainer website or refer to the contact details provided in your product packaging.

Related Documents - PET916

	<p>Petrainer Rechargeable and Waterproof LCD Remote Pet Training System Operating Guide</p> <p>Comprehensive operating guide for the Petrainer Rechargeable and Waterproof LCD Remote Pet Training System (Models IS-PET998DB, IS-PET998DBB). Learn about features, setup, operation, safety, troubleshooting, and training tips for your pet.</p>
	<p>Petrainer Rechargeable & Waterproof LCD Remote Pet Training System User Manual</p> <p>Comprehensive guide to using the Petrainer Rechargeable and Waterproof LCD Remote Pet Training System, covering components, features, setup, training commands, troubleshooting, and FAQs for effective pet obedience and behavior correction.</p>