

[Manuals.plus](#) /

› [Lucida Surfaces](#) /

› Lucida Surfaces BaseCore HEX Sample - Installation and Product Guide

Lucida Surfaces BC-935HSMP

Lucida Surfaces BaseCore HEX Sample - Product Guide

Model: BC-935HSMP

1. INTRODUCTION TO BASECORE HEX SAMPLE

This document provides essential information regarding the Lucida Surfaces BaseCore HEX Sample. This product is a single sample tile designed for evaluation purposes and is not intended for full installation. It allows users to assess the material, color, texture, and peel-and-stick adhesive properties before committing to a larger project.

The BaseCore HEX tiles are luxury vinyl tiles (LVT) featuring a hexagonal shape, designed for durability and ease of use. They are waterproof, heat resistant, and include a textured surface for enhanced slip resistance, making them suitable for various residential applications.



Image: Lucida Surfaces BaseCore HEX Black Marble Sample Tile.

2. SETUP AND PREPARATION FOR SAMPLE EVALUATION

To properly evaluate the sample tile, prepare a small, flat, and clean surface. This will allow you to test the adhesive and appearance accurately.

1. **Clean the Surface:** Ensure the test surface is thoroughly cleaned, free from dust, dirt, grease, and any chemical residues.

2. **Dry the Surface:** Allow the surface to dry completely before proceeding. Moisture can affect adhesive performance.
3. **Inspect the Sample:** Examine the sample tile for any manufacturing defects or damage.
4. **Plan Placement:** Determine where you will place the sample for evaluation. Consider how it will look in different lighting conditions or next to existing materials.



Image: Visual guide for preparing and installing BaseCore HEX tiles, showing the 'Prep & Clean' and 'Plan' stages.

3. OPERATING (SAMPLE APPLICATION)

Applying the sample tile is a straightforward process, mirroring the full installation method for BaseCore HEX products.

1. **Measure and Mark (Optional):** If you need to cut the sample for a specific test area, measure and mark the cut line on the tile.
2. **Score and Cut (Optional):** Use a box cutter or utility razor to carefully score and cut the tile along the marked line. Multiple scores may be needed for a clean break.
3. **Peel the Backing:** Carefully peel off the protective backing from the adhesive side of the tile.

4. **Position and Press:** Align the tile precisely on your prepared surface. Once positioned, press down firmly across the entire surface of the tile.
5. **Apply Pressure:** For optimal adhesion, use a hand roller or apply consistent, firm pressure across the tile to ensure a strong bond with the surface.

Your browser does not support the video tag.

Video: Product Overview for BaseCore Hex Peel and Stick Vinyl Tiles. This video demonstrates the general installation process for BaseCore Hex tiles, including scoring, cutting, peeling the backing, and sticking the tiles, providing a visual guide for how the sample would be applied.

4. MAINTENANCE

BaseCore HEX tiles are designed for low maintenance and high durability. While this is a sample, understanding the maintenance requirements for the full product is beneficial.

- **Cleaning:** The vinyl surface is easy to clean. Use a damp mop or cloth with a mild, pH-neutral cleaner. Avoid abrasive cleaners or harsh chemicals.
- **Durability:** The tiles are waterproof, heat resistant, and scratch resistant, making them suitable for high-traffic and moisture-prone areas.
- **Slip Resistance:** The textured surface provides enhanced slip resistance.



Image: A bathroom featuring black hexagonal peel and stick tiles, illustrating the product's durability, scratch resistance, waterproof nature, ease of maintenance, and simple installation.

5. TROUBLESHOOTING (SAMPLE ADHESION)

If you experience issues with the sample tile adhering to your test surface, consider the following:

- **Surface Cleanliness:** Re-verify that the test surface is completely clean and free of any dust, debris, or oily residues.
- **Surface Dryness:** Ensure the surface is entirely dry. Any moisture will compromise the adhesive bond.
- **Surface Smoothness:** The adhesive performs best on smooth, non-porous surfaces. Uneven or textured surfaces may reduce adhesion.
- **Application Pressure:** Ensure sufficient and even pressure was applied across the entire tile during application.

6. SPECIFICATIONS

Feature	Detail
Product Type	Luxury Vinyl Tile (LVT) Sample
Brand	Lucida Surfaces
Model Number	BC-935HSMP
Material	Vinyl
Color (Sample)	Black Marble
Shape	Hexagonal
Sample Dimensions (L x W x H)	12 x 11 x 1 inches (packaging)
Tile Dimensions	5.75 inch Hexagonal
Tile Thickness	2mm
Wear Layer Thickness	12mil
Installation Type	Peel and Stick (Self-Adhesive)
Grade Rating	Residential
UPC	810051957181

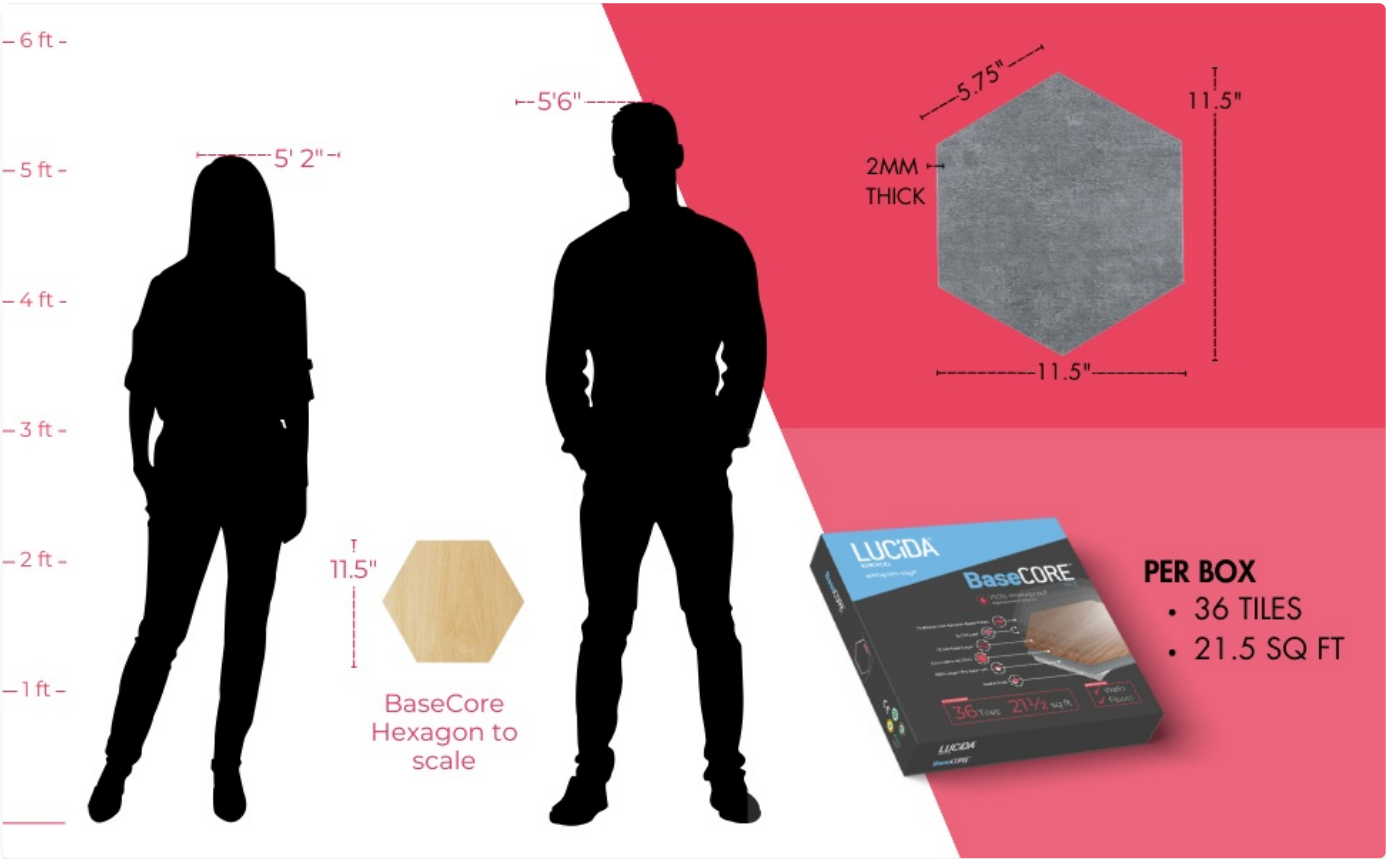


Image: Detailed diagram illustrating the dimensions of a BaseCore Hexagon tile (5.75" hex, 2mm thick, 11.5" overall width) and typical box

7. SAFETY AND ENVIRONMENTAL INFORMATION

Lucida Surfaces is committed to providing products that are safe and environmentally conscious.

- **Recyclable:** The flooring is 100% recyclable and made with virgin materials.
- **Sustainable:** Manufactured using sustainably sourced materials and practices.
- **Family Safe:** Free of phthalates and formaldehyde, ensuring a safer environment for your family.

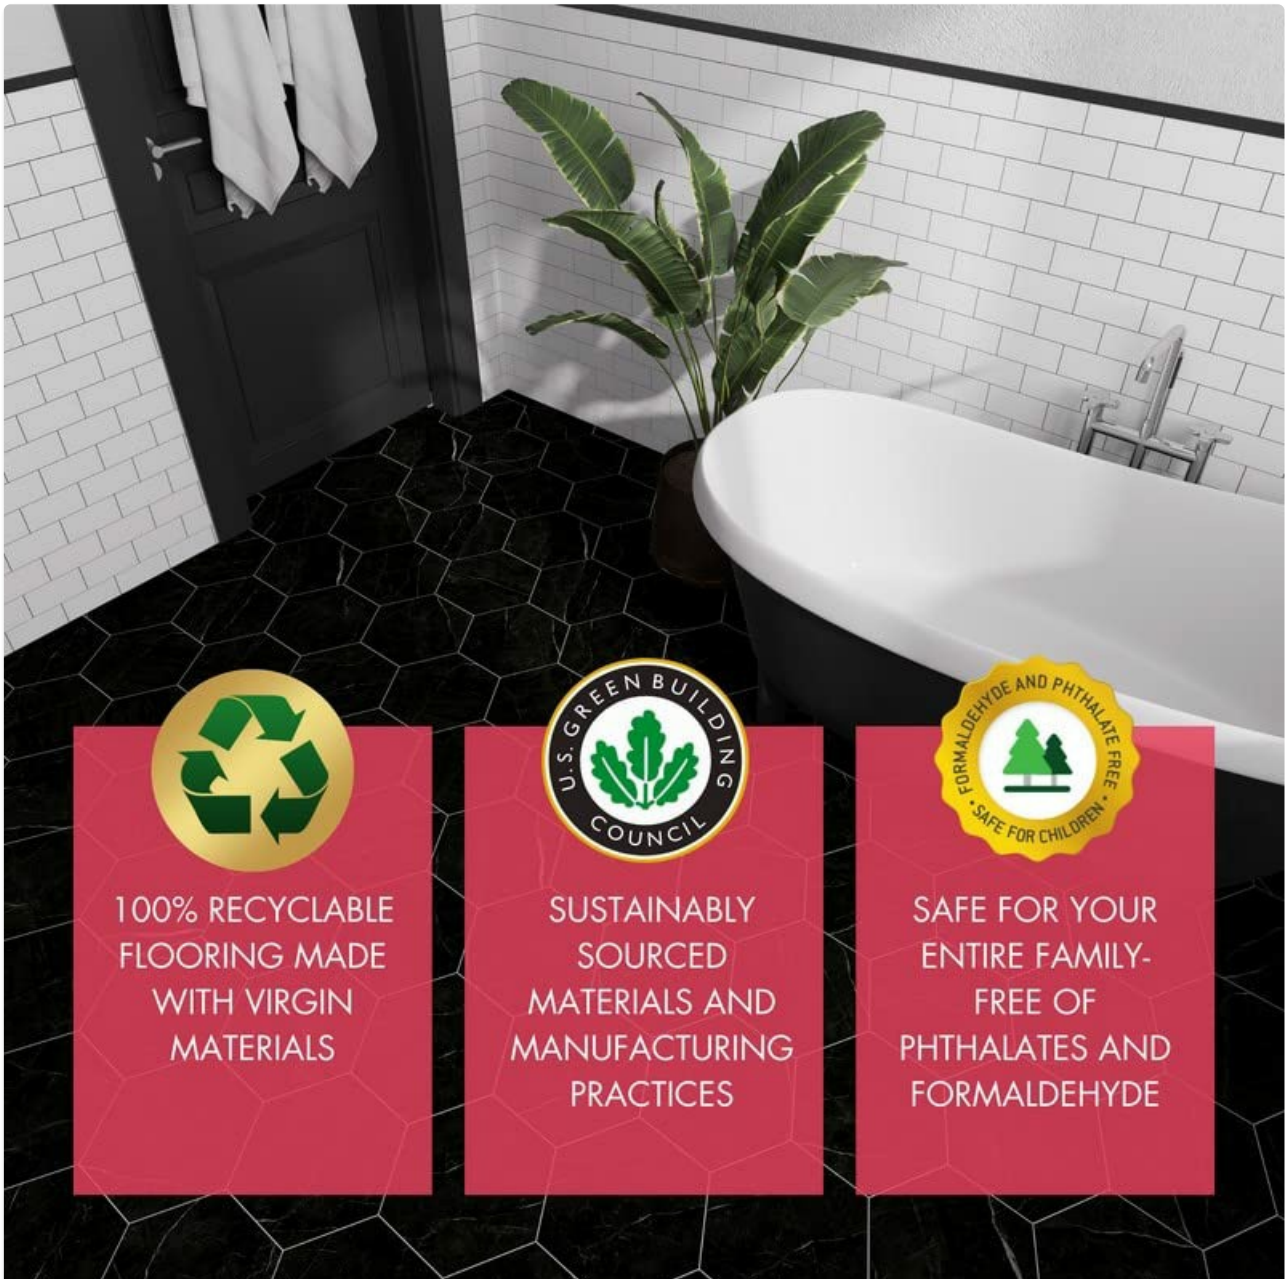


Image: Environmental and safety certifications for BaseCore HEX tiles, including recyclability, sustainable sourcing, and being free of harmful chemicals.

8. SUPPORT AND WARRANTY

As this product is a sample tile, it is primarily for evaluation and does not carry a specific installation warranty. For information regarding the full product line, installation guidelines, or any other inquiries, please refer to the official Lucida Surfaces resources.

For further assistance or product information, please visit the [Lucida Surfaces Store on Amazon](#) or their official website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question