TOTO TCF8CM77

TOTO TCF8CM77 Instantaneous Warm Water Washing Toilet Seat

Model: TCF8CM77

Introduction

This manual provides comprehensive instructions for the safe and efficient use of your TOTO TCF8CM77 Instantaneous Warm Water Washing Toilet Seat. Please read this manual thoroughly before installation and operation, and retain it for future reference. Proper installation and maintenance are crucial for optimal performance and longevity of the product.

Setup and Installation

The installation process for the TOTO TCF8CM77 involves several steps, from ordering to the final setup. It is recommended to follow these steps carefully to ensure correct installation.

Installation Flow



Image Description: This diagram illustrates the six-step process for product installation. Step 1: Order the product. Step 2: Reply to the hearing sheet (a questionnaire about your installation needs). Step 3: Receive schedule confirmation via email. Step 4: Product delivery (by the day before installation). Step 5: Confirm packaging and product status. Step 6: On-site visit and installation.

Standard Installation Details

Standard installation services cover either new installations or replacement installations. Please specify your requirement on the hearing sheet.

New Installation

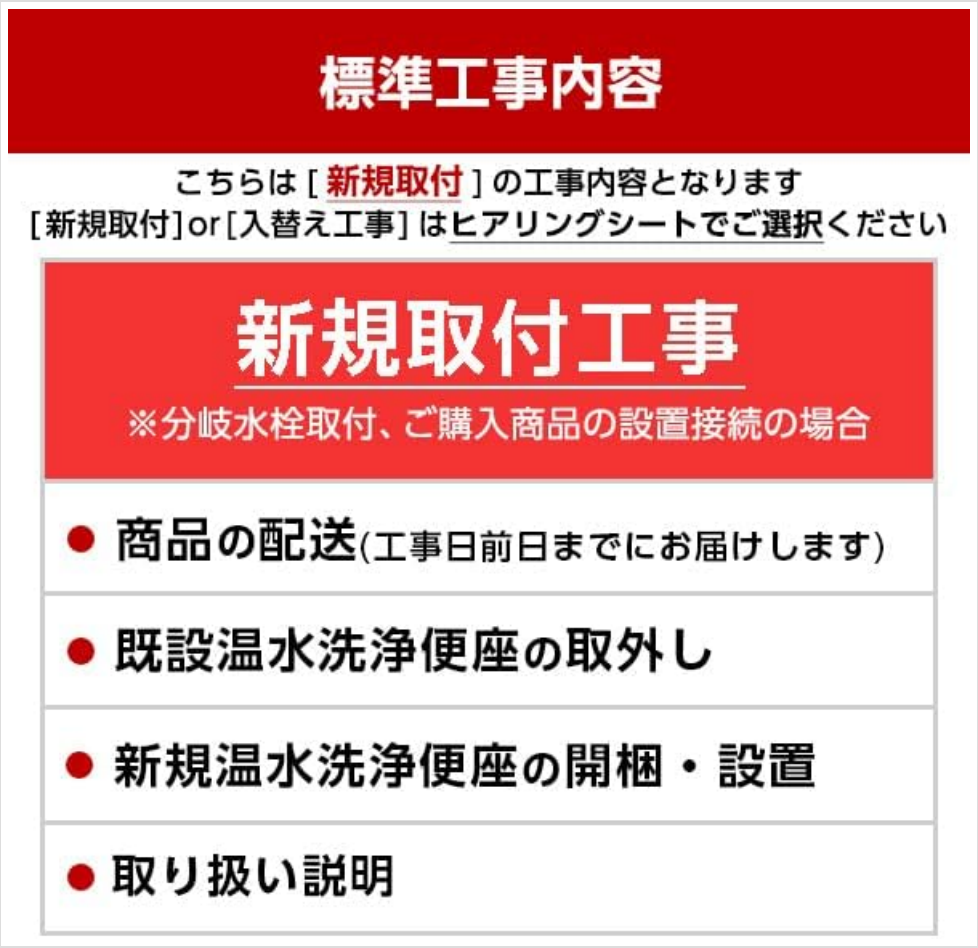


Image Description: This image outlines the scope of work for a new installation. It includes product delivery, removal of any existing toilet seat, unpacking and installation of the new warm water washing toilet seat, and providing handling instructions.

- Product delivery (by the day before installation)
- Removal of existing toilet seat (if any)
- Unpacking and installation of the new warm water washing toilet seat
- Provision of handling instructions

Replacement Installation



Image Description: This image outlines the scope of work for a replacement installation. It includes product delivery, removal of the existing warm water washing toilet seat, unpacking and installation of the new warm water washing toilet seat, and providing handling instructions.

- Product delivery (by the day before installation)
- Removal of existing warm water washing toilet seat
- Unpacking and installation of the new warm water washing toilet seat
- Provision of handling instructions

Additional Charges

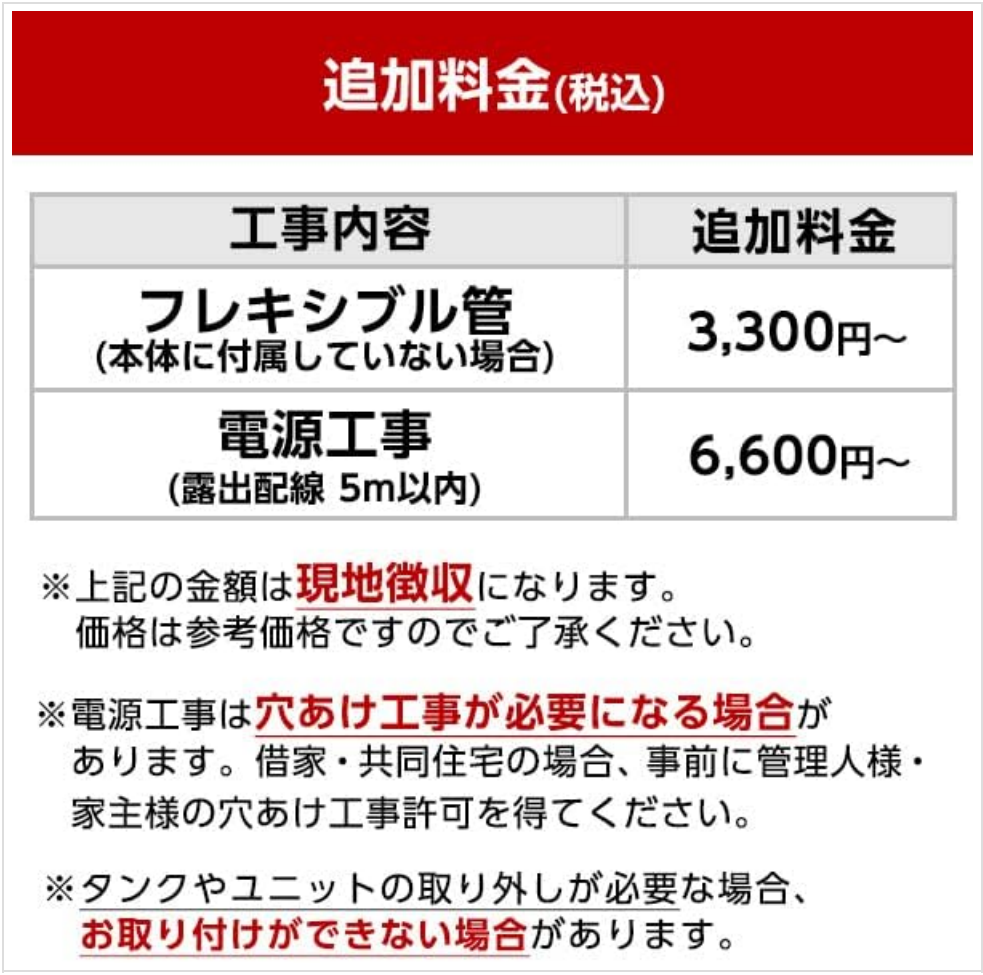


Image Description: This image displays a table of additional charges. It lists charges for a flexible pipe (if not included with the main unit) starting from 3,300 JPY, and power work (exposed wiring within 5m) starting from 6,600 JPY. It notes that these amounts are collected on-site and are reference prices. It also warns that power work may require drilling, and permission from the building manager or owner is needed for shared housing. Furthermore, installation may not be possible if the tank or unit needs to be removed.

Potential Additional Charges (Tax Included)

Work Content	Additional Charge
Flexible pipe (if not included with main unit)	3,300 JPY ~
Power work (exposed wiring within 5m)	6,600 JPY ~

Note: The above amounts are collected on-site. Prices are reference prices and may vary. Power work may require drilling; please obtain permission from your building manager or owner in advance for shared housing. Installation may not be possible if the toilet tank or unit needs to be removed.

Installation Precautions

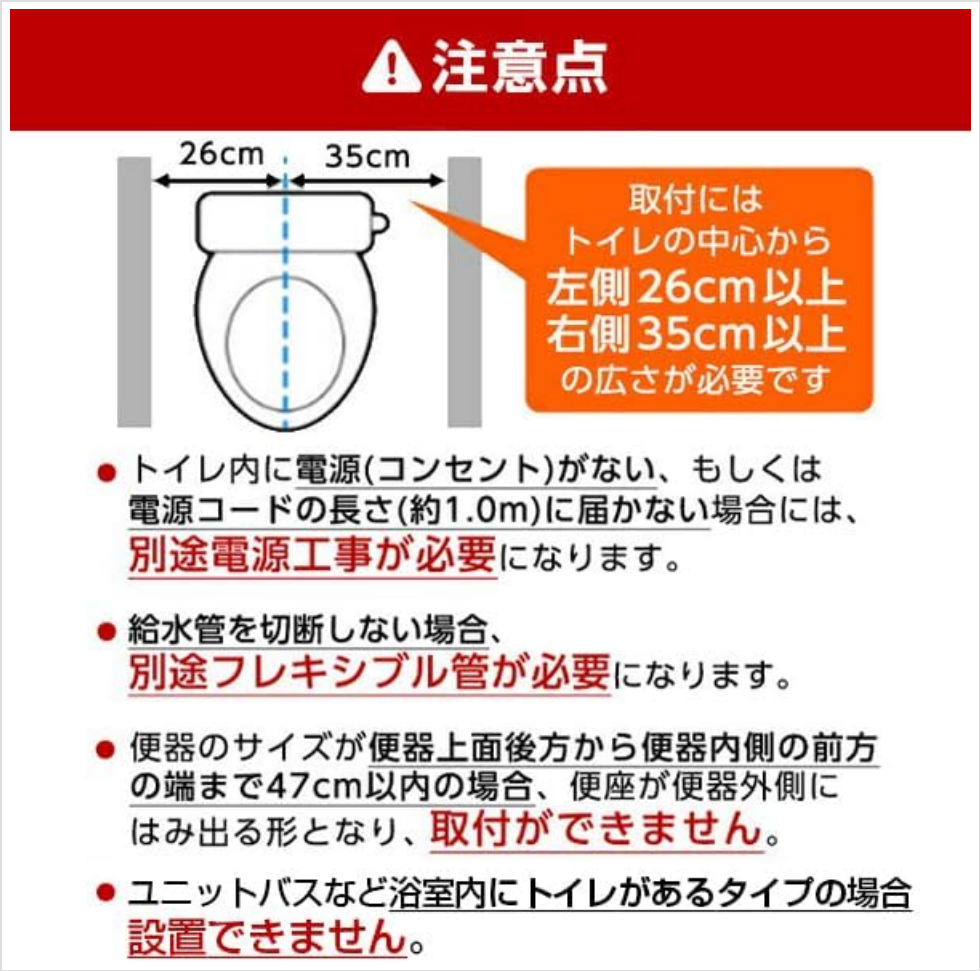


Image Description: This image highlights critical installation precautions. It shows that for installation, a clearance of at least 26cm to the left and 35cm to the right from the center of the toilet is required. It also notes that if there is no power outlet in the toilet area or if the power cord (approx. 1.0m) cannot reach, separate power work will be necessary. If the water supply pipe cannot be cut, a separate flexible pipe is required. If the toilet seat size is within 47cm from the rear top surface to the front edge of the inner side of the toilet bowl, installation is not possible as the seat will protrude. Finally, installation is not possible in unit baths or bathrooms where the toilet is integrated.

- **Required Clearance:** For installation, a minimum clearance of 26cm to the left and 35cm to the right from the center of the toilet is necessary.
- **Power Supply:** If no power outlet is available in the toilet area, or if the product's power cord (approx. 1.0m) cannot reach, separate electrical work will be required.
- **Water Supply:** If the existing water supply pipe cannot be cut, a separate flexible pipe will be necessary.
- **Toilet Bowl Size:** If the distance from the rear top surface of the toilet bowl to the front edge of the inner side of the bowl is less than 47cm, installation is not possible as the toilet seat will protrude.
- **Location Restrictions:** Installation is not possible in unit baths or bathrooms where the toilet is integrated.



Image Description: This image illustrates compatible toilet types for installation: a general toilet, a general toilet with a hand-wash basin, and a wall-mounted tank toilet (with conditions). It emphasizes that installation may be difficult depending on the tank type and position, urging users to check the guide. It also stresses the importance of replying to the hearing sheet and includes a disclaimer regarding liability for damages arising from sales or installation services.

- **Compatible Toilet Types:** This product is generally compatible with standard toilets, standard toilets with hand-wash basins, and wall-mounted tank toilets (conditions apply).
- **Tank Type and Position:** Installation may be difficult depending on the type and position of your toilet tank. Please consult the provided guide for compatibility.
- **Hearing Sheet:** It is mandatory to reply to the hearing sheet to proceed with shipping arrangements.
- **Disclaimer:** Please be aware that the service provider is not liable for any damages arising from the sale or installation services.

Operating Instructions

The TOTO TCF8CM77 is designed for user-friendly operation. Key functions include warm water washing and a heated seat.

- **Rear Wash Function:** Activates a warm water spray for cleansing. Water temperature and spray intensity can typically be adjusted via the control panel.
- **Heated Seat:** Provides a comfortable warm seat. The seat temperature can usually be adjusted to your preference.
- **Instantaneous Water Heating:** This model features an instantaneous heating system, providing warm water on demand without a storage tank.

Refer to the detailed control panel guide provided with your product for specific button functions and adjustment procedures.

Maintenance

Regular cleaning and maintenance will ensure the hygiene and longevity of your toilet seat.

- **Daily Cleaning:** Wipe the exterior surfaces with a soft, damp cloth. Avoid abrasive cleaners or harsh chemicals that could damage the finish.
- **Nozzle Cleaning:** The washing nozzle typically has a self-cleaning function. For manual cleaning, refer to the specific instructions in your product's detailed manual.
- **Filter Maintenance:** Periodically check and clean the water filter to prevent blockages and maintain optimal water flow.
- **Power Off:** When cleaning the unit or if it will not be used for an extended period, turn off the power supply.

TROUBLESHOOTING

This section addresses common issues and their potential solutions.

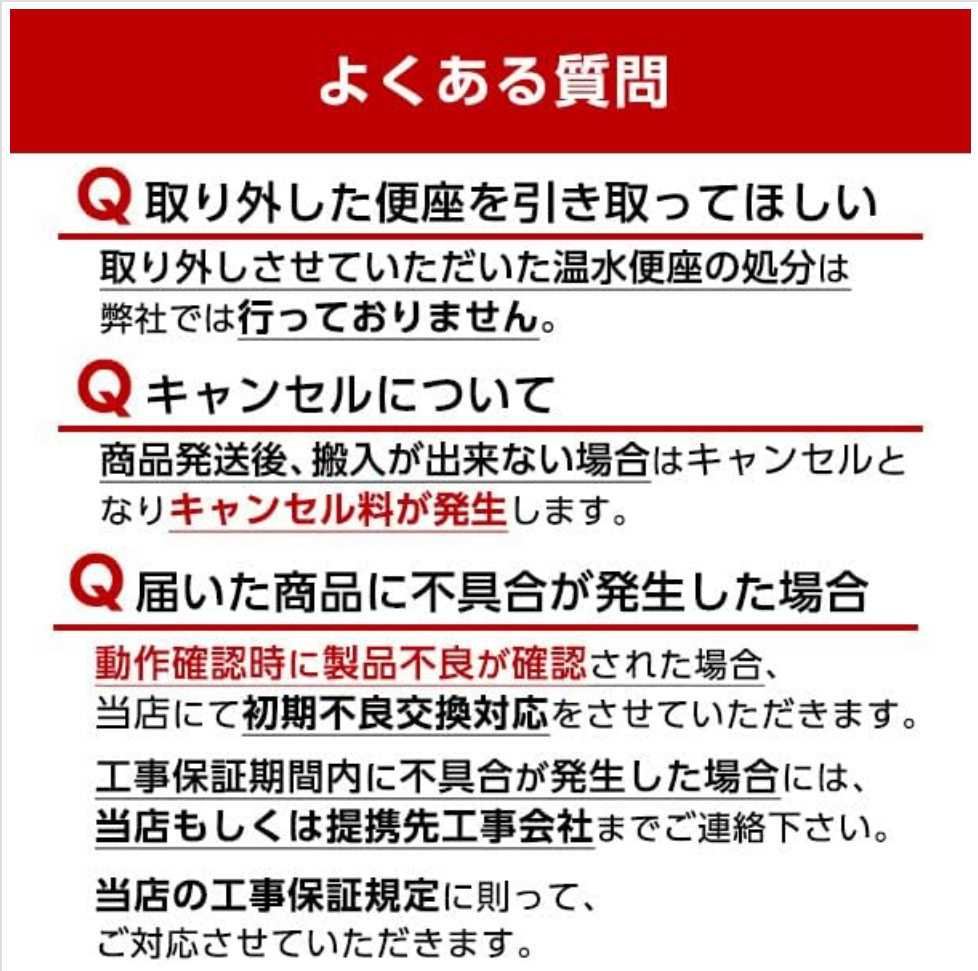


Image Description: This image presents a Frequently Asked Questions section. It clarifies that the company does not handle the disposal of removed toilet seats. For cancellations, a cancellation fee will be incurred if the product has been shipped and cannot be moved. Regarding product defects, if a defect is confirmed during operation checks, the store will provide initial defect exchange support. If a defect occurs within the warranty period, contact the store or the cooperating installation company.

- **Product Not Functioning:** Ensure the power supply is connected and the circuit breaker is not tripped. Check water supply connections.
- **No Warm Water:** Verify that the warm water heating function is enabled and the temperature settings are correct.
- **Water Leakage:** Immediately turn off the water supply and power. Check all connections for tightness. If the leak persists, contact customer support.
- **Product Defects:** If a product defect is confirmed during initial operation checks, the store will provide initial defect exchange support. For defects occurring within the warranty period, please contact the store or the cooperating installation company.

Specifications

Detailed technical specifications for the TOTO TCF8CM77 Instantaneous Warm Water Washing Toilet Seat.

Feature	Specification
Model Number	TCF8CM77
Hot Water Supply Method	Instantaneous Type
Rated Power Supply	AC100V 50/60Hz
Rated Power Consumption	1268W
Rear Wash Water Discharge	Approx. 0.27-0.43 L/min
Hot Water Temperature	Approx. 35-40°C
Wash Heater Capacity	1200W
Heated Seat Heater Capacity	50W
Minimum Required Water Pressure	0.05 MPa (during flow)
Maximum Water Pressure	0.75 MPa (static)
Product Weight	Approx. 5.0 kg
Dimensions (W x D x H)	384mm x 531mm x 131mm

Warranty and Support

Your TOTO TCF8CM77 product comes with a warranty to cover manufacturing defects.

- **Warranty Coverage:** If a defect occurs within the warranty period, please contact the store of purchase or the cooperating installation company for support. The store will provide initial defect exchange support if a defect is confirmed during operation checks.
- **Disposal of Old Unit:** Please note that the service provider does not handle the disposal of removed toilet seats. Users are responsible for arranging the disposal of their old unit.
- **Cancellations:** If a cancellation is requested after the product has been shipped and cannot be moved, a cancellation fee will be incurred.

For any inquiries or support, please refer to the contact information provided at the time of purchase or on your warranty documentation.

© 2023 TOTO Corporation. All rights reserved.