

[Manuals.plus](#) /

› [ClonerAlliance](#) /

› ClonerAlliance Box Pro Instruction Manual

## ClonerAlliance CA-998P

# ClonerAlliance Box Pro User Manual

Model: CA-998P

Standalone 1080p@60fps Video Recorder & Digital Video Converter

## 1. INTRODUCTION

The ClonerAlliance Box Pro is a versatile, standalone video capture and recording device designed for ease of use without requiring a personal computer. It allows you to record video content directly to a USB storage device and play it back on your television. This manual provides detailed instructions for setting up, operating, and maintaining your ClonerAlliance Box Pro.



Image 1.1: ClonerAlliance Box Pro with its remote control.

## 2. PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- ClonerAlliance Box Pro Capture Card
- Remote Control (requires 2 AAA batteries, not included)
- Power Adapter
- HDMI Cable
- MMI Cable (VGA/RCA/YPbPr Adapter)
- To PC Cable (Micro-B to USB-A)
- User Manual (printed or digital)



MMI Cable (VGA/RCA/YPbPr Adapter)



Remote



ClonerAlliance Box Pro



User Manual



Power Adapter



HDMI Cable



To PC Cable  
(Micro-B to USB-A)

Image 2.1: All components included in the ClonerAlliance Box Pro package.

### 3. PRODUCT FEATURES

- **Standalone Operation:** Record and play back videos without the need for a PC.
- **High-Quality Recording:** Captures video at 1080p resolution at 60 frames per second.
- **Multiple Input Support:** Compatible with HDMI, RCA/Composite, Component (YPbPr), and VGA inputs.
- **Direct USB Storage:** Records directly to a USB flash drive or external hard drive (up to 8TB).
- **Instant Playback:** Play recorded videos directly on your TV using the included remote control.
- **Analog to Digital Conversion:** Digitalize old analog videos from VHS players, camcorders, etc., into MP4 files.
- **Scheduling:** Supports various schedule tasks for automated recording.
- **Low Latency Pass-through:** Enjoy real-time viewing on your TV while recording with ultra-low latency (less than 90ms).
- **Wide Compatibility:** Recorded MP4 files are compatible with exFAT, NTFS, FAT/FAT32, MBR, and GPT file systems.

- **PC Connectivity:** Can be used for gaming capture and live streaming when connected to a PC.

# CLONER ALLIANCE BOX PRO

Standalone Video Recorder | Digital Video Converter **1080P@60fps**

The advertisement features a central image of the ClonerAlliance Box Pro, a black rectangular device with a lens-like logo on the front and a remote control in front of it. The device has 'ClonerAlliance' and 'CLONER ALLIANCE BOX PRO' printed on its front. Surrounding the device are several icons and text labels describing its capabilities:

- Convert Analog to Digital:** Represented by an icon of three analog cables (red, white, yellow) and a play button icon with 'MP4' below it.
- Digital Video Recorder:** Represented by an icon of a DVR unit, a remote control, and a play button icon with 'MP4' below it.
- HDMI Video Capture:** Represented by an icon of an HDMI port and a play button icon with 'MP4' below it.
- Screen Recorder:** Represented by an icon of a laptop screen with 'REC' on it and a play button icon with 'MP4' below it.
- Video Game Capture:** Represented by an icon of a game controller with 'LIVE' above it.
- Online Video Recording:** Represented by an icon of a cloud with a play button and a 'REC' icon.
- User-Friendly:** Represented by a circular icon containing a stylized person's head with glasses and a checkmark.

Image 3.1: Overview of ClonerAlliance Box Pro key features.

# Why Choose ClonerAlliance Box Pro?

[●REC][▶ Playback]



✓ **Plug & Play**

Standalone (PC Free)




✓ **1080p@60fps**

Smooth Full HD Recording



✓ **Up to 8TB**

Supports  
Extreme Capacity

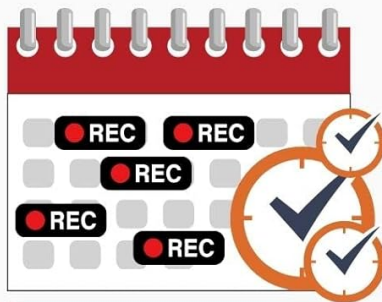

✓ **Schedule**

Various Schedule Modes

- ✓ **exFAT**
- ✓ **NTFS**
- ✓ **FAT/FAT32**
- ✓ **MBR, GPT**

✓ **Compatibility**

Compatible with  
Multiple File Systems



✓ **Trusted**

Trusted Since 2016

Image 3.2: Additional benefits and features of the ClonerAlliance Box Pro.

## 4. CONNECTIONS AND SETUP

Follow these steps to connect your ClonerAlliance Box Pro:

1. **Connect Power:** Plug the power adapter into the '5V/2A' port on the ClonerAlliance Box Pro and then into a power outlet.
2. **Connect Input Source:** Connect your video source (e.g., game console, DVD player, camcorder) to the 'In' port using an HDMI cable or the MMI cable for VGA, RCA, or YPbPr inputs.
3. **Connect to TV:** Connect the 'Out' port of the ClonerAlliance Box Pro to your TV's HDMI input using an HDMI cable.
4. **Insert USB Storage:** Insert a USB flash drive or external hard drive into the 'Storage' USB port. Ensure your storage device is formatted to a compatible file system (exFAT, NTFS, FAT/FAT32).
5. **Power On:** Press the power button on the device or the remote control to turn on the ClonerAlliance Box Pro.

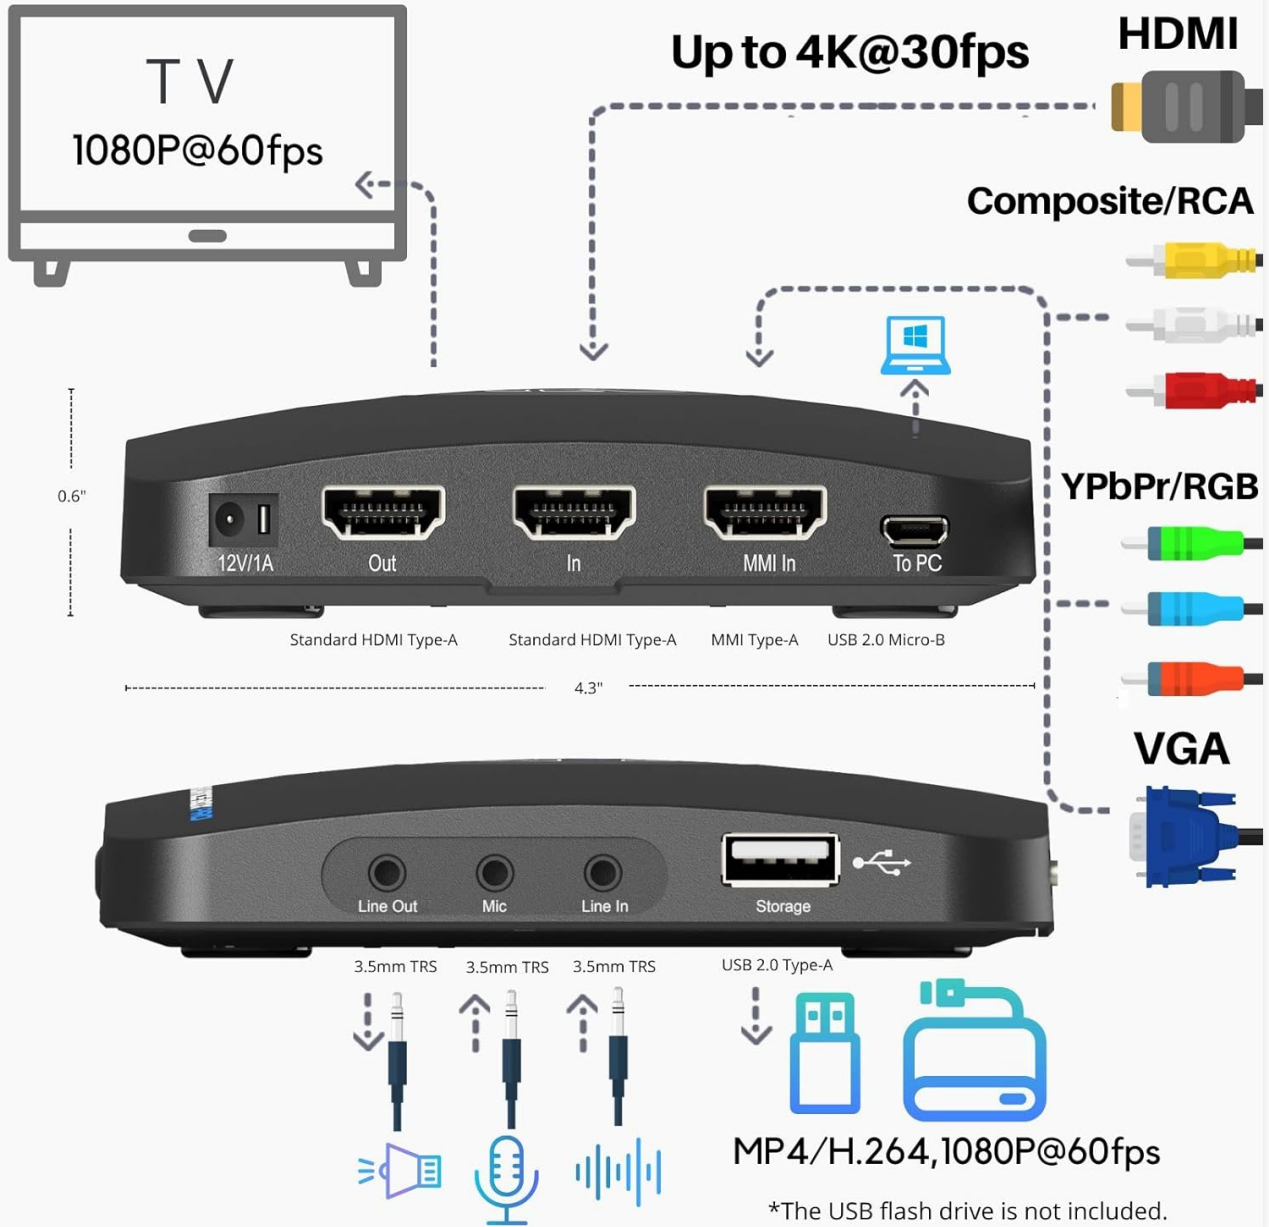


Image 4.1: Detailed diagram of ClonerAlliance Box Pro ports and connections.

# Record and Playback with Your Big TV

The Smart TV & TV Antenna can't be video Sources



Image 4.2: Example setup showing various compatible input devices.

## Setup Video Guide

Your browser does not support the video tag.

Video 4.1: An official video demonstrating the setup and basic operation of the ClonerAlliance Box Pro, including connecting cables and powering on the device. This video also shows how to record and play back content.

## 5. OPERATION

### 5.1 Recording Video

1. Ensure all connections are secure and the device is powered on.
2. Use the remote control to select the correct video source (HDMI, VGA, YPbPr, AV) by pressing the 'VIDEO SOURCE' button. The default source is HDMI.
3. Once the video source is displayed on your TV, press the **REC** button on the remote or the device to start recording. The recording indicator light will illuminate.
4. Press the **STOP** button to end the recording. The recorded file will be saved to your USB storage device.

## 5.2 Playing Back Recorded Videos

1. Press the **PLAYBACK** button on the remote control.
2. Navigate through your recorded files using the arrow keys on the remote.
3. Press **OK** to select and play a file.
4. Use the remote for playback controls such as fast forward (10x), rewind, pause, and stop.



Image 5.1: Remote control functions for recording and playback.

## 5.3 Scheduling Recordings

The device supports various schedule modes for automated recordings. Refer to the detailed digital user manual available on the ClonerAlliance website for specific instructions on setting up scheduled recordings.

## 6. MAINTENANCE

To ensure the longevity and optimal performance of your ClonerAlliance Box Pro, follow these maintenance guidelines:

- Keep the device in a clean, dry environment away from direct sunlight, excessive heat, and moisture.
- Avoid blocking the ventilation holes on the device to prevent overheating.
- Clean the exterior of the device with a soft, dry cloth. Do not use liquid cleaners or aerosols.
- Handle cables and connectors gently to prevent damage.
- When not in use for extended periods, disconnect the power adapter.

## 7. TROUBLESHOOTING

If you encounter issues with your ClonerAlliance Box Pro, refer to the following common problems and solutions:

- **No Signal / "Och, something wrong!" message:**  
This often indicates a synchronization issue. Press and hold the 'Source' button on the device or remote for approximately 10 seconds to re-sync the input signal. Ensure all cables are securely connected and the correct input source is selected.
- **No Recording / Recording Errors:**  
Ensure your USB storage device is properly inserted and has sufficient free space. Use a high-quality USB flash drive or external hard drive. Verify that the storage device is formatted to a compatible file system (exFAT, NTFS, FAT/FAT32).
- **Device does not record content protected by HDCP:**  
The ClonerAlliance Box Pro does not support recording content protected by HDCP (High-bandwidth Digital Content Protection). If connected to an HDCP-protected source, it will output an error message or no signal. This is not a defect of the device.
- **Recorded files are split into multiple parts:**  
Older firmware versions or certain file system formats (like FAT32) may impose a 2GB file size limit, causing recordings longer than approximately 30 minutes to be split into multiple 2GB files. Using NTFS formatted drives can often resolve this, allowing for single, larger files.
- **Playback issues (e.g., slow fast-forward, always starts from beginning):**  
The device's playback functionality has a fixed fast-forward speed (e.g., 10x) and typically starts playback from the beginning of a file. These are inherent characteristics of the device's playback system.

## 8. TECHNICAL SPECIFICATIONS

<b>Brand</b>	ClonerAlliance
<b>Model Name</b>	ClonerAlliance Box Pro
<b>Item Model Number</b>	CA-998P
<b>Video Capture Resolution</b>	1080p@60fps
<b>Hardware Interface</b>	HDMI, VGA, Component Video (YPbPr), Composite Video (RCA), Micro USB 2.0 Type B, USB 2.0 Type A, 3.5mm Audio (Line In/Out, Mic)
<b>Product Dimensions</b>	4.3 x 4.3 x 0.6 inches
<b>Item Weight</b>	6.8 ounces
<b>Color</b>	Black
<b>Voltage</b>	5 Volts

<b>Remote Batteries</b>	2 AAA batteries (not included)
<b>Supported File Systems</b>	exFAT, NTFS, FAT/FAT32, MBR, GPT



Image 8.1: Bottom label of the ClonerAlliance Box Pro with product information.

## 9. WARRANTY AND SUPPORT

ClonerAlliance offers the following for your product:

- **90-Day No Hassle Return:** Enjoy a 90-day return policy at ClonerAlliance's cost.
- **2-Year Replacement Service:** The product is covered by a 2-year replacement service.
- **Free Software:** Free video editing/conversion software is included for Windows systems. (Mac is not supported).

For further assistance, please visit the official ClonerAlliance website or contact their customer support. You can also refer to the comprehensive user manual available for download on their website for more detailed information.

